

COMPLIANT

RECOMMENDED AIR CAP & FLUID TIP SET-UPS

GPG FOR PRIMERS/FILLERS/SURFACERS

FOR WATER/ SOLVENT BASECOAT & CLEARCOAT



A First st falter e Part N B Second



•

D Waist belt, breathing -Part No: PROV-27-K4



PROLITES
FOR SPOT, SMART & PANEL REPAIR

DV1 Basecoat	
DV1 Clearcoat	
DV1-S Clearcoat	
PROLite Gravity	
PROLite Suction & Pressure	14
PROLite S	16
GPG	
FLG	
FLG	
SLGSLG	
DAGR	
TRU-CLEAN	
TRU-CURE IR2S, IR3S, IR3L	29
TRU-CURE UV-LED	
PRO CLEAN	
DMGDGI PRO POD	32
SNAP N FLOW	
DEKUPS	
PRO VISOR	38
PRO AIR - 1	
PRO AIR - 2	
PRO AIR - 3	42 42
ECONOMY REGULATORS	43 44
PAINT CUPS	45
HOSES	46
KBII	
DX PUMPS	
MXL PUMPS	
DVFR	
SHIM-MASK	59
GTI Pro Lite	. 60
GTI Pro	
PRI Pro LiteSRI Pro Lite	
GPI	
GFG Pro	
FLG-5	
GTI Pro	
GTI Pro Lite	
GTI Pro	
PRI Pro	, •
SRI Pro	
GTI Pro	
DAGR	
CVIGTIW-GTIG-PRI	
GTIP-GTIS	
SRI-SRIW	
VRI Pro	
VRI Pro	
JGAGFG	
Pro Visor	
CROMAX	
DEBEER	85
DYNACOAT	
LECHLER	
MIPA	
OCTORAL	
PPG	91
SIKKENS	
SPIES HECKER	
STANDOXSYROX	
CONDITIONS OF SALE	
A GUIDE TO THE DSEAR AND ATEX DIRECTIVES	99

글 DV1 Basecoat

- The DV1 air caps, with advanced internal geometry, result in a perfectly balanced, consistent spray pattern for a perfect finish
- $\bigcirc \ \mathsf{Reduced} \ \mathsf{air} \ \mathsf{pressure} \ \mathsf{resulting} \ \mathsf{in} \ \mathsf{improved} \ \mathsf{spray} \ \mathsf{pattern} \ \mathsf{control}, \mathsf{atomisation} \ \mathsf{consistency}$ and improved transfer efficiency
- O A new combined air inlet and air control valve with 12 x higher precision sensitivity for
- Oconsistently achieves a narrow colour window for the closest colour matching
- New advanced fluid tip design reduces turbulence, minimising mottling/clouding



PART NUMBER EXPLANATION













SPECIFICATIONS

DV1 B+ 'HVLP Plus' Air	Cap
Air Inlet Pressure	2.0 bar (29 psi)
Air Consumption	300 l/min (10.6 cfm)
Spray Pattern Length	325mm @ 200mm target
Fluid Flow	140 - 190 g/min
Air Inlet Thread	1/4" Universal
Cup Capacity	560 mls
Weight (gun only)	470 gms

	DV1 B 'HVLP' Air Cap	
	Air Inlet Pressure	2.0 bar (29 psi)
	Air Consumption	395 l/min (13.9 cfm)
i	Spray Pattern Length	330mm @ 200mm target
	Fluid Flow	130 - 180 g/min
	Air Cap	Plated Brass
	Air Cap Retaining Ring	Black Anodised Aluminium
	Fluid Tip	Stainless Steel
	Fluid Needle	Stainless Steel





DV1-B Air Cap

DV1 BASECOAT SPRAY GUN KITS

When ordering please specify the air cap of your choice (DV1 B or DV1 B+). Please specify fluid tip you require: 11, 12 or 13).

Part No	Description
DV1-U-000-11-B	Gun only DV1 Kit with HVLP air cap & 1.1mm tip
DV1-C-000-12-B+	Gun and cup DV1 kit with HVLP 'Plus' air cap & 1.2mm tip
DV1-U-BAR-11-B	Gun only digital DV1 kit with HVLP air cap & 1.1mm tip
DV1-C-BAR-12-B+	Gun & cup digital DV1 kit with HVLP 'Plus' air cap & 1.2mm tip
DV1-U-BAR-14-1+A	Gun only digital DV1 kit with 1+A air cap & 1.4mm tip

Kit includes complete gravity feed spray gun, gravity cup (if ordered), paint filter, cleaning brush and maintenance tools.

ACCESSORIES

ACCESSORIES	
Part No	Description
704407	DV1 B HVLP air cap and retaining ring
704408	DV1 B+ HVLP 'Plus' air cap and retaining ring
704445	DV1-100-1+A air cap and retaining ring
704411	Fluid tip - size number 11
704412	Fluid tip - size number 12
704413	Fluid tip - size number 13
704414	Fluid tip - size number 14
704416	DV1 fluid needle
704430	Minor service kit
704431	Major service kit
704429	Tool kit
704426	Digital gauge for spreader valve assembly for DV1 - reads in BAR
MPV-60-K3	Pack of 3 male quick detach uni swivel - fits to gun air inlet
HAF-507	Lightweight in-line air filter
4900-5-1-K3	Pack of 3 cleaning brushes
905207	Pack of 5 gravity cup filters for GFC cups






MPV-60-K3



704431

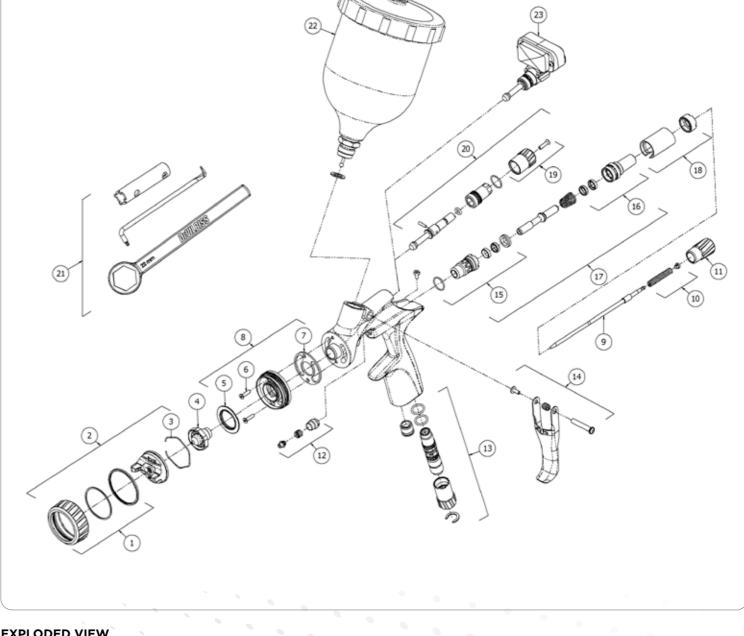

EXPLODED VIEW

Ref No	Description	Part No
1	Retaining ring sub assembly	704425
2	DV1-B HVLP Air Cap	704407
	DV1-B+ HVLP Air Cap	704408
3	Spring clip (kit of 5)	JGA-156-K5
4	Fluid tip 12	704412
	Fluid tip 13	704413
	Fluid tip 14	704414
5	Deflector plate	704402
6+	Spray head screws (kit of 3)	704403
7+	Gasket (kit of 2)	704401
8	Spray head kit	704400
9	Fluid needle	704416
10#+	Needle spring kit	704405
11	Fluid adjusting knob	704404
12+	Packing, spring & packing nut kit	702731
13	Inline flow valve	704417
14	Tigger. Stud, spring & screw kit	704406
15#	Front cage assembly	704422

16	Rear seal assembly	704423
17+	Air valve assembly	704424
18	Sleeve kit	704428
19	Spreader knob (non digital)	704419
20	Spreader valve assembly	704418
21	Tool kit	704429
22	Gravity cup (black)	GFC-515
23	Digital pressure gauge	704426
	Service Kits	
	Minor service kit: Includes items marked # Plus air valve spring, spreader valve pin & o rings	704430
	Major service kit: Includes items marked + Plus spreader valve pin & o rings	704431



- O Delivers ultimate clearcoat application performance
- Sprays a uniform pattern that lays the clearcoat flat
- O Atomizes effortlessly, producing an even distribution of super-fine particles
- OProvides maximum comfort and easy use from set-up through the entire spraying process



PART NUMBER EXPLANATION













SPECIFICATIONS

DV1 C1+ 'HVLP Plus' Air Cap			
Air Inlet Pressure	2.0 bar (29 psi)		
Air Consumption	285 l/min (10.0 cfm)		
Spray Pattern Length	325mm @ 200mm target		
Fluid Flow	140 - 190 g/min		
Air Inlet Thread	1/4" Universal		
Cup Capacity	560 mls		

Weight (gun only)	470 gms
Air Cap	Plated Brass
Air Cap Retaining Ring	Black Anodised Aluminium
Fluid Tip	Stainless Steel
Fluid Needle	Stainless Steel

DV1 CLEARCOAT SPRAY GUN KITS

When ordering please specify the fluid tip you require: 1.0, 1.1, 1.2, 1.3 or 1.4.

Part No	Description
DV1-U-000-1.1-C1+	Gun only DV1 Kit with HVLP air cap & 1.1mm tip
DV1-C-000-1.2-C1+	Gun and cup DV1 kit with HVLP air cap & 1.2mm tip
DV1-U-BAR-1.1-C1+	Gun only digital DV1 kit with HVLP air cap & 1.1mm tip
DV1-C-BAR-1.2-C1+	Gun & cup digital DV1 kit with HVLP air cap & 1.2mm tip
DV1-C-BAR-12-C2+	Gun & cup digital DV1 kit with HVLP air cap & 1.2mm tip
DV1-C-BAR-13-C2+	Gun & cup digital DV1 kit with HVLP air cap & 1.3mm tip

Kit includes complete gravity cup and paint filter (if ordered) and maintenance tools.

ACCESSORIES

Part No	Description
704434	DV1 C1+ HVLP air cap and retaining ring
704435	DV1 C2+ HVLP air cap and retaining ring
704440	Fluid tip 1.0 mm
704441	Fluid tip 1.1 mm
704442	Fluid tip 1.2 mm
704443	Fluid tip 1.3 mm
704444	Fluid tip 1.4 mm
704416	DV1 fluid needle
704430	Minor service kit
704431	Major service kit
704429	Tool kit
704426	Digital gauge for spreader valve assembly for DV1 - reads in BAR
MPV-60-K3	Pack of 3 male quick detach uni swivel - fits to gun air inlet
HAF-507	Lightweight in-line air filter
4900-5-1-K3	Pack of 3 cleaning brushes
905207	Pack of 5 gravity cup filters for GFC cups




4900-5-1-K3





704431

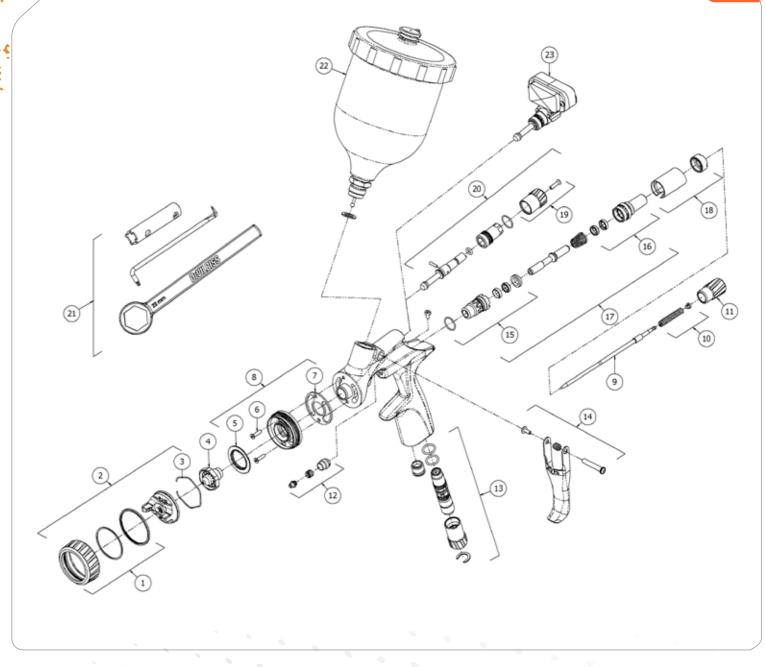

EXPLODED VIEW

Ref No	Description	Part No
1	Retaining ring sub assembly	704425
2	DV1-C1+ HVLP Air Cap	704434
3	Kit of 5 retaining rings/JGA-156-K5	JGA-156-K5
4	Fluid tip 1.0 mm	704440
	Fluid tip 1.1 mm	704441
	Fluid tip 1.2 mm	704442
	Fluid tip 1.3 mm	704443
	Fluid tip 1.4 mm	704444
5	Deflector plate	704402
6+	Spray head screws (kit of 3)	704403
7+	Gasket (kit of 2)	704401
8	Spray head kit	704436
9	Fluid needle	704416
10#+	Needle spring kit	704405
11	Fluid adjusting knob	704404
12+	Packing, spring & packing nut kit	702731
1.3	Inline flow valve	704417

14	Tigger, stud, spring & screw kit	704406
15#	Front cage assembly	704422
16	Rear seal assembly	704423
17+	Air valve assembly	704424
18	Sleeve kit	704437
19	Spreader knob (non digital)	704419
20	Spreader valve assembly	704418
21	Tool kit	704429
22	Gravity cup (plastic)	GFC-501
23	Digital pressure gauge	704426
	Service Kits	
	Minor service kit: Includes items marked # Plus air valve spring, spreader valve pin & o rings	704430
	Major service kit: Includes items marked + Plus spreader valve pin & o rings	704431



SPOT REPAIR APPLICATION Clearcoat by DEVILLIS AUTOMOTIVE REPAIRMENT

= DV1-S Clearcoat

- O Delivers ultimate clearcoat application performance
- Sprays consistent and homogeneous spray patterns
- O Atomizes effortlessly with a selection of finely tuned air cap and fluid nozzle setups
- OProvides maximum comfort and easy use from set-up through the entire spraying process
- OProvides maximum comfort and ease of use with right the first time results



Table 1: Performance Guide			
Air Cap Part Number	704451	704452	704453
Air Cap & Type	DV1-M1 Micro (HVLP)	DV1-S1 Plus (HVLP)	DV1-S2 (HVLP)
Recommended Air Pressure at Gun Inlet	1.00 bar (15 psi)	1.75 bar (25 psi)	1.75 bar (25 psi)
Air Consumption	50 L/min (1.8 scfm)	115 L/min (4.1 scfm)	130 L/min (4.6 scfm)
Fluid Flow	1 - 50 g/min	5 - 125 g/min	5 - 125 g/min
Pattern Height	60mm (2.4 in)	200mm (7.9 in)	5 - 125 g/min

DV1-S CLEARCOAT SPRAY GUN KITS

When ordering please specify the fluid tip you require: 1.0, 1.1, 1.2, 1.3 or 1.4.


Part No	Description
704531	DV1-S HVLP Plus Kit (0.7,0.9, DV1-M1, cupped)
704532	DV1-S HVLP Plus Kit (1.0,1.2, DV1-S1, cupped)
704532	DV1-S HVLP Plus Kit (1.0,1.2, DV1-S2, cupped)

ACCESSORIES

Part No	Description
704451	DV1-M1 HVLP Plus Air Cap
704452	DV1-S1 HVLP Plus Air Cap
704453	DV1-S2 HVLP Plus Air Cap
704454	DV1-221-07M Fluid Tip (0.7mm)
704455	DV1-221-09M Fluid Tip (0.9mm)
704456	DV1-220-08S Fluid Tip (0.8mm)
704457	DV1-220-10S Fluid Tip (1.0mm)
704458	DV1-220-12S Fluid Tip (1.2mm)
704460	DV1-321M Fluid Needle
704459	DV1-320S Fluid Needle
704465	Fluid Adjusting Knob Kit
704467	Spreader Valve - Non Digital
704471	Air Valve Assembly
704477	DV1-M1 Test HVLP Plus Air Cap Kit
704478	DV1-S1 TEST HVLP Plus Air Cap Kit
704479	DV1-S2 TEST HVLP Plus Air Cap Kit
704403	Screw (Kit of 3)
905294	Needle Packing Kit (SN-404-K)
704405	Fluid Needle Spring Kit of 3
704417	Inline Flow Valve Asssy

DV1-S SMART/SPOT REPAIR GUN SYSTEM

COMPONENTS & ORDER NUMBERS

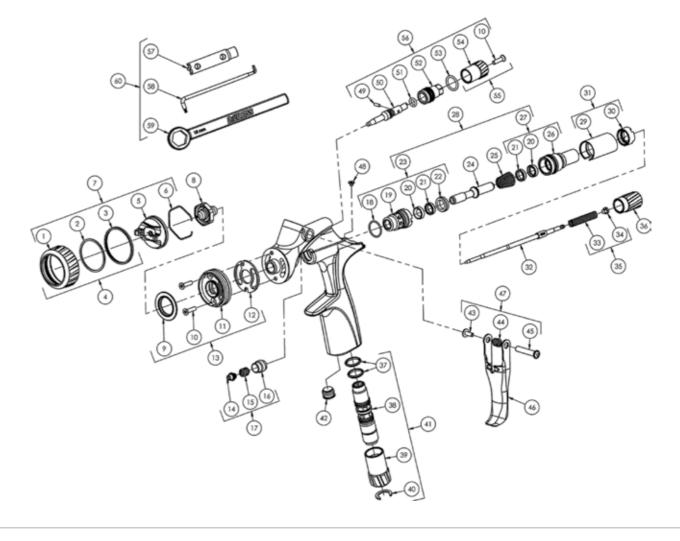

EXPLODED VIEW

Ref No	Description	Part No	Qty
1	Retaining Ring	-	1
2	Slip Ring	-	1
3	Retaining Ring Seal	-	1
4	Retaining Ring Sub Assembly	704472	1
5	Air Cap	-	1
6	Spring Clip (Kit of 5)	704480	1
7	Air Cap & Retaining Ring	See table 1	1
8	Fluid Nozzle	See table 2	1
9	Deflector Plate	704464	1
10+	Screw (Kit of 3)	704403	3
11	Sprayhead	-	1
12+	Gasket (Kit of 2)	704463	1
13	Spray Head Kit	704462	1
14	Needle Packing	-	1
15	Packing Spring	-	1
16	Packing Nut	-	1
17+	Packing, Spring & Packing Nut Kit	905294	1
18	O-Ring	-	1
19	Air Valve Cage	-	1
20	Seal	-	2
21*	Seal Guide	-	2
22*	Valve Seat	-	1
23#	Front Cage Assembly	704469 POA	1
24	Air Valve Stem	-	1
25#	Air Valve Spring	-	1
26	Rear Seal Housing	-	1
27	Rear Seal Assembly	704470	1
28+	Air Valve Assembly	704471	1
29	Identification Sleeve	-	1
30	Sleeve Nut	-	1

31	Sleeve Kit	704473	1
32	Fluid Needle	See table 2	1
33	Needle Spring	-	1
34	Spring Pad	-	1
35#+	Needle Spring Kit	704405	1
36	Fluid Adjusting Knob	704465	1
37	O-Ring	-	2
38	Flow Valve Body	-	1
39	Flow Valve Knob	-	1
40	Circlip	-	1
41	Inline Flow Valve	704417	1
42	Plug	-	1
43	Trigger Screw	-	1
44	Spring	-	1
45	Trigger Stud	-	1
46	Trigger	-	1
47	Trigger, Stud, Spring & Screw Kit	704466	1
48	Screw	-	1
49#+	Spreader Valve Pin	-	1
50	Spreader Valve Stem	-	1
51#+	O-Ring	-	1
52	Valve Body	-	1
53#+	O-Ring	-	1
54	Spreader Valve Adjusting Knob	-	1
55	Spreader Knob Kit	704468	1
56	Spreader Valve Assembly	704467	1
57	Valve Tool	-	_1
58	Torx Driver	-	1
59	Tip Wrench	-	1
60	Tool Kit	704474	1

GRAVITY CUPS

Part No	Description
905311	Gravity Cup Kit
905202	Drip Check Lid (Kit of 5)
905308	Gravity Cup Lid (Kit of 2)
905309	Filter (Kit of 3)
905312	Funnel (Kit of 12)

SERVICE KITS

JERVICE	KIIS
Part No	Description
704475	DV1s Minor Service Kit Includes Items Marked #
704476	DV1s Major Service Kit Includes Items Marked +







■ DV1-3 Gun Case Kit

A custom designed ruggedised gun case that is waterproof and corrosion free, featuring all the latest DeVilbiss technology

DV1-3 GUN CASE

Part No	Description
704704	DV1-3 Gun case kit

ACCESSORIES

Part No	Description
DV1-C-BAR-13-B+	1 x DV1 Basecoat Digi Gravity Gun & Cup Kit
DV1-C-BAR-13-C1+	1 x DV1 Clearcoat Digi Gravity Gun & Cup Kit
704532	1 x DV1S HVLP Plus Gravity Gun & Cup Kit
704407	1 x DV1-100-B, HVLP Air Cap Kit
704412	1 x DV1-200-12B Fluid Tip 1.2mm
704435	1 x DV1-100-C2+, HVLP Air Cap Kit
704442	1 x DV1-210-12C Fluid Tip 1.2mm
704458	1 x DV1-220-12S Fluid Tip 1.2mm
HAV-501-B	1 x Boxed Valve with gauge
DK-437	3-Gun Hard Case
704467	Spreader Valve - Non Digital
704471	Air Valve Assembly
704477	DV1-M1 Test HVLP Plus Air Cap Kit
704478	DV1-S1 Test HVLP Plus Air Cap Kit
704479	DV1-S2 Test HVLP Plus Air Cap Kit
704403	Screw (Kit of 3)
905294	Needle Packing Kit (SN-404-K)
704405	Fluid Needle Spring Kit of 3
704417	Inline Flow Valve Asssy



NOTE

PROLite Gravity by DEVILBISS ATTOMOTIVE REFINISATION

≡ PROLite Gravity

- Lightweight design delivers a uniform spray pattern and atomization distribution for an exceptional quality finish that professional painters demand
- Range of advanced air cap technologies for excellent application performance with the latest waterborne and solventborne coatings
- Environmental legislation-compliant atomization with high transfer efficiency resulting in significant paint savings
- Drop-forged aluminum, anodized gun body with removable air baffle for a longer working life



SPECIFICATIONS

or con lower one	
Weight (gun only)	445g
Gun Body	Anodized Aluminium
Air Cap	Plated Brass
Air Cap Retaining Ring & Knobs	Clear Anodised Aluminium
Fluid Nozzle	Stainless Steel
Fluid Needle	Stainless Steel
Air Inlet Thread	1/4" Universal



TE10

High Efficiency



TE20

High Efficiency

Air Cap



High Efficiency

Air Cap





TE110 High Efficiency Air Cap

HV30 HVLP Air Cap

PROLITE GRAVITY SPRAY GUN KITS

Part No	Description
905053	Gravity Gun & Acetal Cup Kit (PROLITE-GTE25-12-C)
905058	Gravity Gun & Acetal Cup Kit (PROLITE-GHV30-12-C)
905059	Gravity Gun & Acetal Cup Kit (PROLITE-GHV30-13-C)
905063	Gravity Gun & Acetal Cup Kit (PROLITE-GT110-12-C)
905064	Gravity Gun & Acetal Cup Kit (PROLITE-GT110-13-C)
905068	Gravity Gun & Acetal Cup Kit (PROLITE-GTE10-12-C)
905069	Gravity Gun & Acetal Cup Kit (PROLITE-GTE10-13-C)
905071	Gravity Gun & Acetal Cup Kit (PROLITE-GTE20-12-C)
905072	Gravity Gun & Acetal Cup Kit (PROLITE-GTE20-13-C)
905052	Gravity Gun & Acetal Cup Kit (PROLITE-GTE25-11-C)
905054	Gravity Gun & Acetal Cup Kit (PROLITE-GTE25-13-C)
905067	Gravity Gun & Acetal Cup Kit (PROLITE-GTE10-11-C)



KGP-5-K5



4900-5-1-K3

ACCESSORIES

Part No	Description
905240	TE10 Air Cap Assembly with Retaining Ring
905241	TE20 Air Cap Assembly with Retaining Ring
905242	TE25 Air Cap Assembly with Retaining Ring
905245	T110 Air Cap Assembly with Retaining Ring
905238	HV30 Air Cap Assembly with Retaining Ring
905246	1.1mm Fluid Nozzle
905247	1.2mm Fluid Nozzle
905248	1.3mm Fluid Nozzle
905249	1.4mm Fluid Nozzle
905250	1.5mm Fluid Nozzle
905266	PROLite Gravity Fluid Needle
905281	Spray Gun Service/Repair Kit
905206	Seal & Pin Kit
905296	Gun Wrench, Torx & Flat Back Screwdriver, Cleaning Brush & Color ID Rings
DGIPRO-504-BAR-K	Digital Gauge for Spreader Valve Assembly (Bar readout)
905204	Acetal Gravity Cup - 560ml
905359	Aluminum Gravity Cup - 900ml
DPC-43	DeKups® Adaptor
SNF-43	SNAP N FLOW™Adaptor




MPV-60-K3



HAF-507



PRO-470

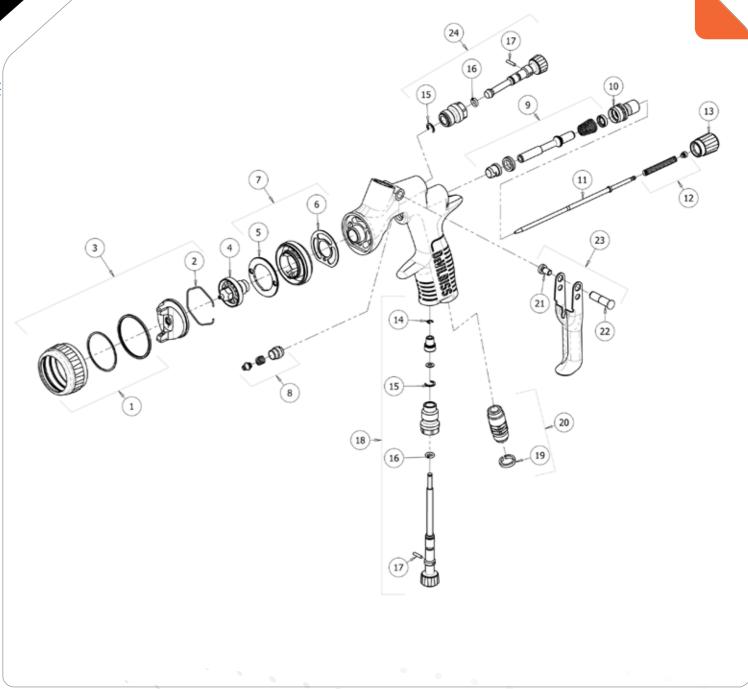

EXPLODED VIEW

Ref No	Description	Part No			
1	Retaining Ring Sub Assembly 1	905280	13	Fluid Adjusting Knob 1	905302
2	Spring Clip (kit of 5) 1	905208	14	Circlip (kit of 5) 1	905200
3	See Accessories (left) Air Cap & Retaining Ring 1		15*	† - Circlip 1	
4	See Accessories (left) Fluid Nozzle 1		16*	† - O Ring 1	
5	Baffle Plate 1	905297	17*	† - Spreader Valve Pin 1	
6*	Gasket (kit of 2) 1	905287	18	Airflow Valve 1	905276
7	Spray Head Kit 1	905303	19	Color ID Ring Kit (4 colors) 1	905289
8*	Packing, Spring & Packing Nut Kit 1	905294	20	Air Inlet 1	905305
9	Air Valve Assembly 1	905282	21*	- Trigger Screw 1	
10	Air Valve Body 1	905301	22*	- Trigger Stud 1	
11	Fluid Needle 1	905266	23	Trigger, Stud & Screw Kit 1	905306
12*	Needle Spring Kit 1	905283	24	Spreader Valve Assembly 1	905275

^{* 905281 -} Spray Gun Repair Kit contains all the parts indicated with an asterisk. † 905206 - Seal & Pin Kit, kit of 5 (Items 15, 16, & 17).

 12

PROLite Suction & Pressure by

≡ PROLite Suction & Pressure

- Lightweight and comfortable handle design with reduced trigger travel to decrease operator fatigue.
- Advanced range of air cap technology for exceptional application performance with the latest waterborne and solventborne coatings.
- Environmental legislation-compliant atomization with high transfer efficiency resulting in significant paint savings.
- Forged aluminum gun body with unique QuickClean™ coating and a removable air baffle for a longer working life.



SPECIFICATIONS

Part No

905243

905244

905234

905238

905240

905245

905241

905231

905235

905270

905271

905272

905274

905281

905206

905296

905353

SI ECII ICATIONS				
Weight (gun only)	500g			
Gun Body	Anodized Aluminium			
Air Cap	Plated Brass			
Air Cap Retaining Ring & Knobs	Clear Anodised Aluminium			
Fluid Nozzle	Stainless Steel			
Fluid Needle	Stainless Steel			
Air Inlet Thread	1/4" Universal			



TE30 High Efficiency









HV30 HVLP Air Cap

TE10 High Efficiency









cy TE110 High Efficiency C30 Conventional Ci Air Cap Air Cap

PROLITE SUCTION & PRESSURE SPRAY GUN KITS

Description

Part No	Description	Air Cap
905100 to 905105	Prolite Pressure Conventional Gun Kit (*see details)	C86
905106 to 905111	Prolite Pressure Conventional Gun Kit (*see details)	C30
905112 to 905117	Prolite Pressure Conventional Gun Kit (*see details)	C797
905142 to 905144	Prolite Pressure HVLP Gun Kit (*see details)	HV30
905145 to 905147	Prolite Pressure High Efficiency Gun Kit (*see details)	T110
905148 to 905150	Prolite Pressure High Efficiency Gun Kit (*see details)	TE10
905151 to 905153	Prolite Pressure High Efficiency Gun Kit (*see details)	TE20
905154 to 905155	Prolite Pressure High Efficiency Gun Kit (*see details)	TE30
905118 to 905120	Prolite Pressure High Efficiency Gun Kit (*see details)	TE40
905121 to 905123	Prolite Suction Conventional Gun Kit (*see details)	C86
905157	Prolite Suction Conventional Gun Kit	C30
905158	Prolite Suction High Efficiency Gun Kit	T110
905159	Prolite Suction High Efficiency Gun Kit	TE10
905160	Prolite Suction High Efficiency Gun Kit	TE20
ACCESSORIES		

TE30 Air Cap Assembly with Retaining Ring

TE40 Air Cap Assembly with Retaining Ring

C797 Air Cap Assembly with Retaining Ring

HV30 Air Cap Assembly with Retaining Ring

TE10 Air Cap Assembly with Retaining Ring

TE20 Air Cap Assembly with Retaining Ring

T110 Air Cap Assembly with Retaining Ring

C30 Air Cap Assembly with Retaining Ring

C86 Air Cap Assembly with Retaining Ring

Spray Gun Service/Repair Kit

Suction Cup & Lid Assembly

Seal & Pin Kit

PROLite P/S Fluid Needle for 0.85 & 1.0mm Nozzles

PROLite P/S Fluid Needle for 1.2 & 1.4mm Nozzles

PROLite P/S Fluid Needle for 1.6 & 1.8mm Nozzles

PROLite P/S Fluid Needle for 1.6, 1.8 & 2.0mm Suction Feed PRO-200s

Gun Wrench, Torx & Flat Back Screwdriver, Cleaning Brush & Color ID Rings



KGP-5-K5



4900-5-1-K3




MPV-60-K3



HAF-507



PRO-470

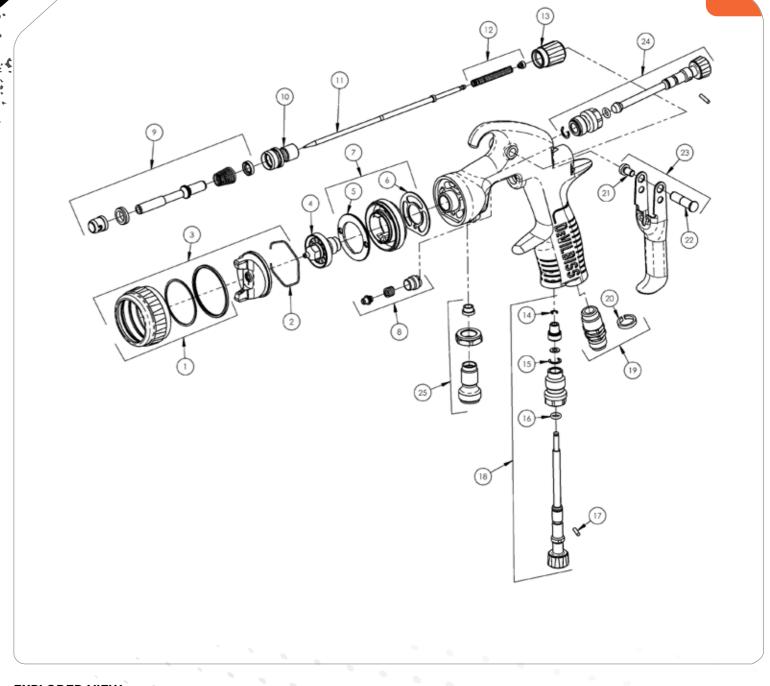

EXPLODED VIEW

	Ref No	Description	Part No			
	1	Retaining Ring Sub Assembly 1	905280	14	Circlip (kit of 5) 1	905200
	2	Spring Clip (kit of 5) 1	905208	15*	† - Circlip 1	
	3	See Accessories (left) Air Cap & Retaining Ring 1		16*	† - O Ring 1	
	4	See Accessories Fluid Nozzle 1		17*	† - Spreader Valve Pin 1	
	5	Baffle Plate 1	905297	18	Airflow Valve 1	905276
	6*	Gasket (kit of 2) 1	905287	19	Air Inlet 1	905305
	7	Spray Head Kit 1	905303	20	Color ID Ring Kit (4 colors) 1	905289
	8*	Packing, Spring & Packing Nut Kit 1	905294	21*	Trigger Screw 1	
	9	Air Valve Assembly 1	905282	22*	Trigger Stud 1	
	10	Air Valve Body 1	905301	23	Trigger, Stud & Screw Kit 1	905306
ĺ	11	See Accessories (left) Fluid Needle 1		24	Spreader Valve Assembly 1	905275
	12*	Needle Spring Kit 1	905283	25	Fluid Inlet Kit 1	905001
	13	Fluid Adjusting Knob 1	905302			

^{* 905281 -} Spray Gun Repair Kit contains all the parts indicated with an asterisk. † 905206 - Seal & Pin Kit, kit of 5 (Items 15, 16, & 17).

PROLite's by DEVILBISS AUTOMOTIVE REFINISHING

- Lightweight design delivers a uniform spray pattern and atomization distribution for an exceptional quality finish that professional painters demand.
- Range of advanced air cap technologies for excellent application performance with the latest waterborne and solventborne coatings.
- Environmental legislation-compliant atomization with high transfer efficiency resulting in significant paint savings.
- Drop-forged aluminum, anodized gun body with removable air baffle for a longer working life.



SPECIFICATIONS

of Lon Torrions				
Weight (gun only)	395g			
Gun Body	Anodized Aluminium			
Air Cap	Plated Brass			
Air Cap Retaining Ring & Knobs	Clear Anodised Aluminium			
Fluid Nozzle	Stainless Steel			
Fluid Needle	Stainless Steel			
Air Inlet Thread	1/4" Universal			









High Efficiency

HVLP Air Cap

MC1 High Efficiency Air Can

RS1 High Efficiency

PROLITES GRAVITY SPRAY GUN KITS

Part No	Description
905083	Gravity Gun & Cup Kit (PROLITE-S-HV5-08-C)
905084	Gravity Gun & Cup Kit (PROLITE-S-HV5-10-C)
905085	Gravity Gun & Cup Kit (PROLITE-S-HV5-12-C)
905086	Gravity Gun & Cup Kit (PROLITE-S-HV5-14-C)
905087	Gravity Gun & Cup Kit (PROLITE-S-TE5-08-C)
905088	Gravity Gun & Cup Kit (PROLITE-S-TE5-10-C)
905089	Gravity Gun & Cup Kit (PROLITE-S-TE5-12-C)
905090	Gravity Gun & Cup Kit (PROLITE-S-TE5-14-C)
905091	Gravity Gun & Cup Kit (PROLITE-S-RS1-08-C)
905092	Gravity Gun & Cup Kit (PROLITE-S-RS1-10-C)
905093	Gravity Gun & Cup Kit (PROLITE-S-RS1-12-C)
905094	Gravity Gun & Cup Kit (PROLITE-S-RS1-14-C)
905095	Gravity Gun & Cup Kit (PROLITE-S-MC1-06-C)

ACCESSORIES


Part No	Description
905316	TE5 Air Cap with Retaining Ring Assembly
905313	HV5 Air Cap with Retaining Ring Assembly
905314	MC1 Air Cap with Retaining Ring Assembly
905315	RS1 Air Cap with Retaining Ring Assembly
905317	0.8mm Fluid Nozzle
905318	1.0mm Fluid Nozzle
905319	1.2mm Fluid Nozzle
905320	1.4mm Fluid Nozzle
905323	PROLite-S Fluid Needle for 0.8 & 1.0mm Nozzles
905324	PROLite-S Fluid Needle for 1.2 & 1.4mm Nozzles
905321	0.6mm Micro Fluid Nozzle
905325	PROLite-S Micro Fluid Needle for 0.6mm Nozzle
905279	PROLite-S Spray Gun Repair Kit
905307	Torx & Flat Blade Screwdriver for Trigger & Needle Packing
HAV-501-B	In-Line Air Adjusting Valve
905311	Acetal Gravity Cup - 125ml
DPC-23	DeKups® Adaptor
SNF-23	SNAP N FLOW™ Adaptor



SPN-8-K2 & SRi-50-K2



MPV-60-K3

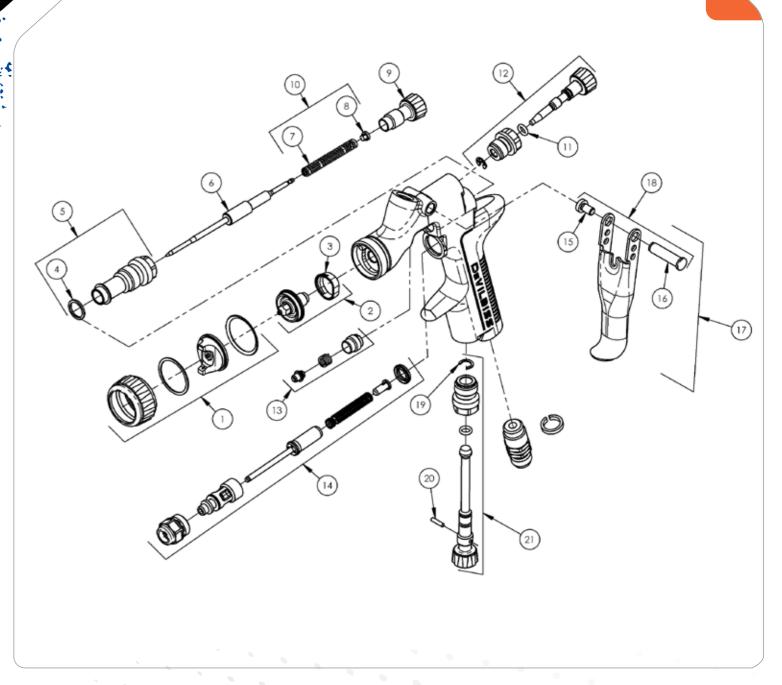

EXPLODED VIEW

_/			
Ref No	Description	Part No	
1	See Accessories (left) Air Cap & Retaining	g Ring 1	12
2	See Accessories (left) Fluid Nozzle & Sep	arator 1	13
3*	Separator (kit of 5) 1	905322	14
4*	- Body Bushing Seal 1		15
5	Body Bushing & Seal 1	905300	16
6	See Accessories (left) Fluid Needle 1		17
7*	- Needle Spring 1		18
8*	- Needle Spring Pad 1		19
9	Fluid Adjusting Knob 1	905304	20
10	Spring & Pad (kit of 3) 1	905299	
11*	- Spreader Valve Seal 1		

^{* 905279 -} Spray Gun Repair Kit contains all the parts indicated with an asterisk

12	Spreader Valve Assembly 1	905326
13*	Packing, Spring & Packing Nut Kit 1	905294
14	Air Valve Assembly 1	905293
15*	- Trigger Stud Screw (T20 Torx) 1	
16*	- Trigger Stud 1	
17	Trigger, Stud & Screw Kit 1	905298
18	Stud & Screw Kit (kit of 5) 1	905295
19*	- Circlip 1	
20*	- Spreader Valve Pin 1	



- Rugged anodized and forged aluminum gun body with lightweight aluminum controls for a long working life.
- Robust and smooth air valve design provides greater air and paint control to help ease fade-outs and blend-ins.
- Ultra high flow fluid nozzles provide superb versatility across the major range of viscosities.
- Suitable for all primers including the latest generation waterborne and UV materials for fast and efficient application.



SPECIFICATIONS

o o o o	
Weight (gun only)	500g
Gun Body	Anodized Aluminium
Air Cap	Plated Brass
Air Cap Retaining Ring & Knobs	Clear Anodised Aluminium
Fluid Nozzle	Stainless Steel
Fluid Needle	Stainless Steel
Air Inlet Thread	1/4" Universal



High Efficiency

Air Cap



Air Cap







C86 C30
Conventional
Air Cap Air Cap

PR10 High Efficiency Air Cap

GPG SPRAY GUN KITS

Part No	Description	
905000 to 905002	GPG Gravity Conventional Gun Kit (*see details)	C86
905003 to 905005	GPG Gravity Conventional Gun Kit (*see details)	C30
905006 to 905008	GPG Gravity High Efficiency Gun Kit (*see details)	GPG1
905029 to 905033	GPG Gravity High Efficiency Primer Gun Kit (*see details)	PR10
905034 to 905035	GPG Gravity High Efficiency UV Primer Gun Kit (*see details)	PR10

ACCESSORIES

, 10020011.120			
Part No	Description		
905229	GPG1 Air Cap Assembly with Retaining Ring		
905230 GPG2 Air Cap Assembly with Retaining Ring			
905228	C86 Air Cap Assembly with Retaining Ring		
905227	C30 Air Cap Assembly with Retaining Ring		
905209	PR10 Air Cap Assembly with Retaining Ring		
905281	Spray Gun Repair Kit (Includes seals, packing & springs)		
905206	Seal & Pin Kit		
905204	Acetal Gravity Cup - 560ml		
DPC-43	DeKups® Adaptor		
SNF-43	SNAP N FLOW™ Adaptor		
Multi-Purpose HE & & HVLP Setup Components (GPG1 & GPG2 Air Caps)			
905259 to 905264	1.2mm1.8mm HE/HVLP Fluid Nozzle (*see details)		
905267	Multi-Purpose Fluid Needle for 1.2, 1.3 & 1.4mm Nozzles		
905268	Multi-Purpose Fluid Needle for 1.6 & 1.8mm Nozzles		
Multi-Purpose Conventional Setup Components (C86 & C30 Air Caps)			
905223 to 905225	1.4mm1.8mm Conventional Fluid Nozzle (*see details)		
905267	Multi-Purpose Fluid Needle for 1.4mm Nozzles		
905268	Multi-Purpose Fluid Needle for 1.6 & 1.8mm Nozzles		
Primer Setup Compo	onents (PR10 Air Cap)		
905213 to 905217	1.4mm2.5mm Primer Fluid Nozzle (*see details)		
905218	Primer Fluid Needle		
905211	UV1 Primer Fluid Nozzle		
905212	UV2 Primer Fluid Nozzle		
905219	UV Primer Fluid Needle		
905205	UV Gravity Cup - 560ml		
PRO-46-K3	Protective Air Cap Cover for UV Materials (kit of 3)		



KR-484-K10



MPV-60-K3




HAF-507



RO-415-1



GFV-50-F

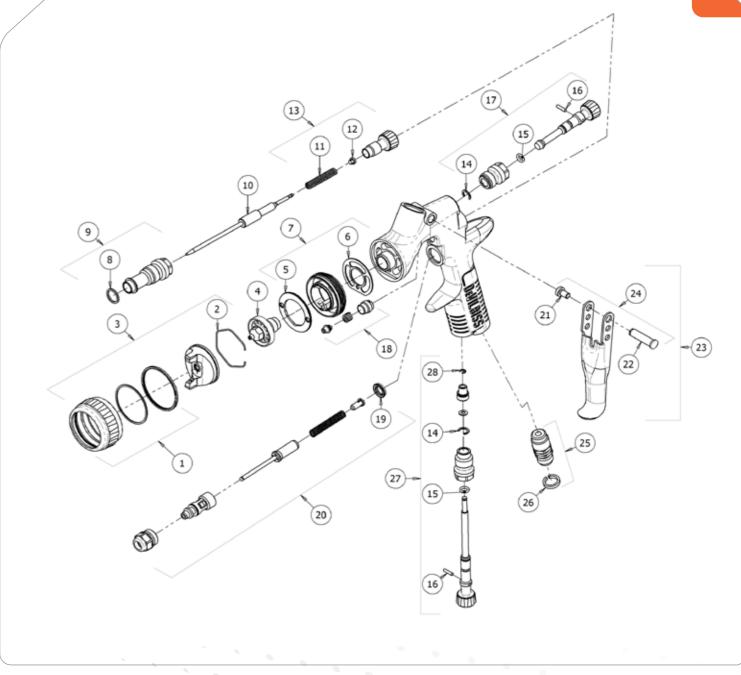

EXPLODED VIEW

Ref No	Description	Part No			
1	Retaining Ring Sub Assembly 1	905329	15*	† - O Ring 2	
2	Retaining Ring Sub Assembly 1	905208	16*	† - Spreader Valve Pin 2	
3	See Accessories (left) Air Cap &	905322	17	preader Valve Assembly 1	905328
3	Retaining Ring 1	903322	18*	Packing, Spring & Packing Nut Kit 1	905294
4	See accessories Fluids Nozzle 1		19	Air Valve Seal 1	905290
5	Baffle Plate 1	905297	20	Air Valve Assembly 1	905293
6*	Gasket (kit of 2) 1	905287	21	Trigger Screw 1	
7	Spray Head Kit 1	905286	22*	Trigger Stud 1	
8*	Body Bushing Seal 1		23	Trigger, Stud & Screw Kit 1	905288
9	Body Bushing & Seal 1	905300	24	Stud & Screw Kit (kit of 5) 1	905295
10	See Accessories (left) Fluid Needle 1		25	Air Inlet 1	905305
11*	Needle Spring 1		26	Color ID Ring Kit (4 colors) 11	905289
12*	Spring Pad 1	905327	27	Airflow Valve 1	905277
13	Fluid Adjusting Knob, Spring & Pad Kit 1	905322	28	Circlip (kit of 5) 1	905200
1/1*	Circlin 2	† -	20208		

^{* 905279 -} Spray Gun Repair Kit contains all the parts indicated with an asterisk





- Full control of pattern shape, fluid flow rate and air inlet pressure for consistent application.
- Smooth action trigger with exceptionally light pull for reduced fatigue during long operation.
- Efficient atomization technology for reduced material usages.
- $\ \ \, \bigcirc$ Flexible setup options of gravity, suction or pressure feed to meet your needs.



SPECIFICATIONS

Weight (gun only)	465g	
Gun Body	Anodized Aluminium	
Air Cap	Plated Brass	
Air Cap Retaining Ring & Knobs	Clear Anodised Aluminium	
Fluid Nozzle	Stainless Steel	
Fluid Needle	Stainless Steel	
Air Inlet Thread	1/4" Universal	



FLG5 High Efficiency Air Cap

FLG SPRAY GUN KITS

Part No	Description	
905166	Gravity Gun & Acetal Cup Kit (FLG-G5-13-C)	
905167	Gravity Gun & Acetal Cup Kit (FLG-G5-14-C)	
905168	Gravity Gun & Acetal Cup Kit (FLG-G5-18-C)	
905169	Gravity Gun & Acetal Cup Kit (FLG-G5-20-C)	




4900-5-1-K3

ACCESSORIES

Part No	Description
905332	FLG-5 Air Cap
905345	FLG Retaining Ring
905352	Fluid Nozzle Seal (pack of 10)
905335	FLG Gravity/Suction Feed Baffle Replacement Kit
905336	FLG Pressure Feed Baffle Replacement Kit
905337	FLG Gravity/Suction Spray Gun Repair Kit
905204	Acetal Gravity Cup - 560ml
905359	Aluminum Gravity Cup - 900ml
802200	DPC-43 - DeKups® Adaptor (Gravity Feed Guns)
803750	SNF-43 - SNAP N FLOW™ Adaptor (Gravity Feed Guns)
Gravity Feed Setup Components (FLG-5 Air Cap)	
905340	1.3mm Gravity Fluid Nozzle
905341	1.4mm Gravity Fluid Nozzle
905344	1.8mm Gravity Fluid Nozzle
905341	2.0mm Gravity Fluid Nozzle
905344	FLG Gravity Fluid Needle for 1.3 & 1.4mm Nozzles
905341	FLG Gravity Fluid Needle for 1.8mm Nozzle
905340	FLG Gravity Fluid Needle for 2.0mm Nozzle





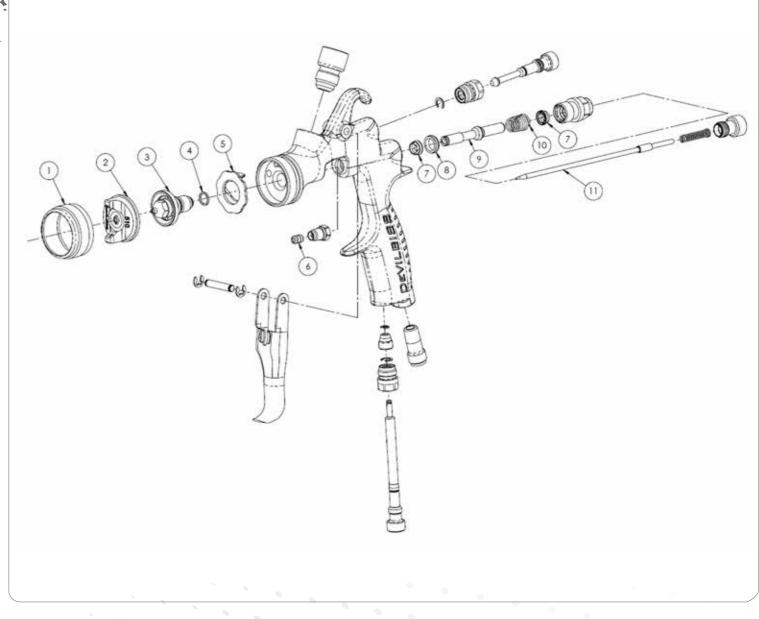

EXPLODED VIEW

Ref No	Description	Part No			
1	Retaining Ring 1	905345	7	*	† - Seal 2
2	See Accessories (left) Air Cap 1	905208	8	k	† - Valve Seat 1
3	See Accessories (left) Fluid Nozzle 1		9	k	† - Air Valve Stem 1
4*	† - Gasket 1	905352	10	*	† - Air Valve Spring 1
5*	† - Sprayhead Gravity & Suction 1 Sprayhea	d Pressure Only1	1		See Accessories (left) Fluid Needle 1
6*	- Needle Packing 1	905339	12	2	† - Gasket 1

905335 - Gravity/Suction Gun Baffle Replacement Kit (Items 4 & 5) # 905336 - Pressure Gun Baffle Replacement Kit (Items 4 & 5)

* 905337 - Gravity/Suction Gun: Seal, Baffle & Gasket Replacement Kit (Items 4, 5, 6, 7, 8, 9 & 10)

† 905338 - Pressure Gun Only: Seal, Baffle & Gasket Replacement Kit (Items 4, 5, 7, 8, 9, 10 & 12)



FLG Suction & Pressure by

∃ FLG

- © Full control of pattern shape, fluid flow rate and air inlet pressure for consistent application.
- Smooth action trigger with exceptionally light pull for reduced fatigue during long operation.
- Efficient atomization technology for reduced material usages.
- $\ \ \, \bigcirc$ Flexible setup options of gravity, suction or pressure feed to meet your needs.



SPECIFICATIONS

Weight (gun only)	485g
Gun Body	Anodized Aluminium
Air Cap	Plated Brass
Air Cap Retaining Ring & Knobs	Clear Anodised Aluminium
Fluid Nozzle	Stainless Steel
Fluid Needle	Stainless Steel
Air Inlet Thread	1/4" Universal





FLG5 - Suction High Efficiency Air Cap

FLG622 - Pressure High Efficiency Air Cap

FLG SPRAY GUN KITS

Part No	Description
905170	Pressure Gun Only Kit (FLG-P622-11-U)
905171	Pressure Gun Only Kit (FLG-P622-14-U)
905172	Pressure Gun Only Kit (FLG-P622-18-U)
905173	Suction Gun & Cup Kit (FLG-S5-18-C)



1.8mm Suction Fluid Nozzle

Accessories				
Part No	Description			
905332	FLG-5 Air Cap			
905333	FLG-622 Air Cap			
905345	FLG Retaining Ring			
905352	Fluid Nozzle Seal (pack of 10)			
905335	FLG Gravity/Suction Feed Baffle Replacement Kit			
905336	FLG Pressure Feed Baffle Replacement Kit			
905337	FLG Gravity/Suction Spray Gun Repair Kit			
905338	FLG Pressure Spray Gun Repair Kit			
905353	Suction Cup & Lid Assembly			
802200	DPC-43 - DeKups® Adaptor (Gravity Feed Guns)			
803750	SNF-43 - SNAP N FLOW™ Adaptor (Gravity Feed Guns)			
Suction Feed Setup Components (FLG-5 Air Cap)				
905344	1.8mm Suction Fluid Nozzle			
905351	FLG Suction Fluid Needle for 1.8mm Nozzle			
Pressure Feed Setup C	Components (FLG-622 Air Cap)			
905343	1.1mm Pressure Fluid Nozzle			
905341	1.4mm Pressure Fluid Nozzle			
905344	1.8mm Pressure Fluid Nozzle			
905346	FLG Pressure Fluid Needle for 1.1mm Nozzle			
905347	FLG Pressure Fluid Needle for 1.4mm Nozzle			
905351	FLG Pressure Fluid Needle for 1.8mm Nozzle			



4900-5-1-K3



IAV-501-B



(K-4584





EXPLODED VIEW

Ref No	Description	Part No
1	Retaining Ring 1	905345
2	See Accessories (left) Air Cap 1	
3	See Accessories (left) Fluid Nozzle 1	
4*	† - Gasket 1	
5*	† - Sprayhead Gravity & Suction 1 Sprayhead Pressure Only1	
6*	- Needle Packing 1	
7*	† - Seal 2	
8*	† - Valve Seat 1	

9*	† - Air Valve Stem 1
10*	† - Air Valve Spring 1
11	See Accessories (left) Fluid Needle 1
12	† - Gasket 1

905335 - Gravity/Suction Gun Baffle Replacement Kit (Items 4 & 5)

905336 - Pressure Gun Baffle Replacement Kit (Items 4 & 5)

* 905337 - Gravity/Suction Gun: Seal, Baffle & Gasket Replacement Kit (Items 4, 5, 6, 7, 8, 9 & 10)

† 905338 - Pressure Gun Only: Seal, Baffle & Gasket Replacement Kit (Items 4, 5, 7, 8, 9, 10 & 12)



- General purpose gravity feed compliant spray gun
- Lightweight and strong aluminium construction
- Smooth fluid flow and pattern shape controls
- © Ergonomically shaped handle for positive grip
- OPrecision engineered brass air cap provides excellent atomisation of most popular compliant automotive refinish materials
- The kit includes: a removable paint filter, a cleaning brush and universal spanner for easy cleaning and maintenance.

SPECIFICATIONS

Air Inlet Pressure	2.0 Bar
Air Consumption	250 l/min (8.8 cfm)
Air Inlet Thread	1/4" Universal
Cup Capacity	550ml
Weight (gun & cup)	Gun 480g / Cup 160g
Air Cap	Brass - Nickel Plated
Retaining Ring	Anodised Aluminium
Fluid Tip	Stainless Steel
Fluid Needle	Stainless Steel

Part No	Description
SLG-620-13-K10	Gravity Gun with 1.3mm fluid tip
SLG-620-18-K10	Gravity Gun with 1.8mm fluid tip
SLG-620-25-K10	Gravity Gun with 2.5mm fluid tip
SLG-450	Gravity Cup and Lid
SLG-40-K10	Needle Packing (Kit of 10)















- O The kit comprises the SLG lightweight aluminium general purpose spray gun and the HVLP touch up/detailing gun
- The full size compliant SLG spray gun is fitted with a 1.3mm fluid tip and needle, a solid brass air cap and an aluminium 600ml paint cup
- The HVLP touch up/detailing gun comes complete with a 1mm fluid tip and needle, a solid brass air cap and a 250ml paint cup



SPECIFICATIONS

000		
	Description	Touch Up
Air Inlet Pressure	2.0 Bar	
Air Consumption	250 l/min (8.8 cfm)	
Air Inlet Thread	1/4" Un	iversal
Cup Capacity	600ml	250ml
Weight (gun & cup)	Gun 480g / Cup 160g	Gun 260g / Cup 90g
Air Cap	Brass - Nic	kel Plated
Retaining Ring	Anodised A	Aluminium
Fluid Tip	Stainless Steel	
Fluid Needle	Stainles	ss Steel

Part No	Description
SLG-650-K4	TWO GUN CASE KIT INCLUDES: Compliant Spray Gun (General Purpose), 1.3 mm, HVLP Spray Gun (Touch-Up), 1.0 mm, One 600 ml Cup, One 250 ml Cup Fluid Tip & Needle, 1.8 mm, Cleaning Brushes, Wrench, Air Adjusting Valve with Gauge









- Sprays most automotive paints and lacquers.
- O Hairline detail to high paint-flow shading and gradual fades.
- Uightweight, well balanced with smooth double action trigger.
- Orown cap standard for fine lines and needle protection.
- Pre-set handle for precise control of paint flow.
- Removable 9 mls (1/3rd oz) gravity cup.
- Solvent proof fluid passages, PTFE needle packing.
- Precision made and hand tested in the U.S.A.






SPECIFICATIONS

SPECII ICATI	0113	
Operating Pres	ssure	1.3 - 3.5 bar (20 -50 psi)
Max inlet press	sure	12 bar (175 psi)
Fluid tip		0.35mm
Cup Capacity		9 mls (1/3 fl/oz)
Airbrush platir	ng	Nickel, copper, chrome
Needle Packin	g	PTFE (solvent proof)
Hose: Inside di	ameter	3.2 mm (1/8")
Air Hose conn	ection	1/4" NPS (M)
Universal fluid	threaded connector	3/8"

DAGR AIRBRUSH KIT AND ACCESSORIES

Part No	Description
DGR-501G-35	DAGR Gravity Airbrush - 0.35mm - 9 cc Cup/lid (1/3 fl/oz)
DGR-123	3m (10') Braided Nylon Air Hose with loose nut 1/4" swivel connections
DGR-121K	Repair Kit - 'O' Rings, needle spring and washers
DGR-124	3m (10') Braided Air Hose with QD
DGR-127	Quick Disconnect Kit

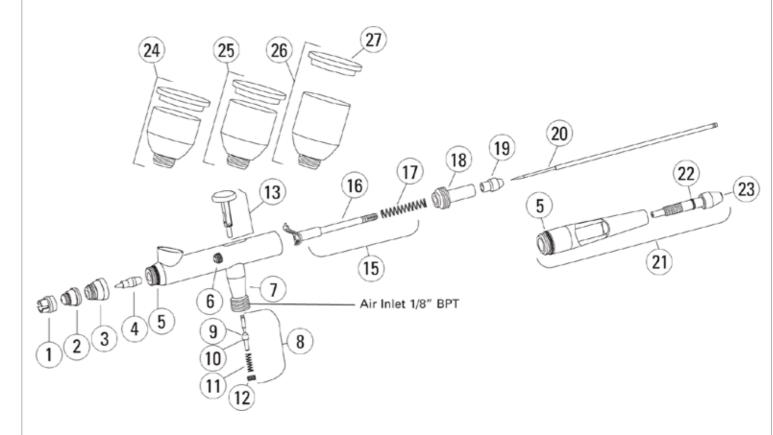

*DAGR REPAIR KIT (DGR-121K) INCLUDES:

Ref No	Description
5	3 x O-rings (head cap & handle)
9	2 x Air valve o-ring
17	1 x Needle spring
22	1 x O-ring (pre-set needle knob)

Ref No	Description	Part No			
1	Crown cap	DGR-101	16	Needle guide and rocker	
2	Air cap (for .35mm nozzle)	DGR-103-35	17*	Needle spring	
3	Head cap	DGR-104	18	Spring guide	DGR-111
4	Nozzle (.35mm)	DGR-105-35	19	Needle locknut	DGR-112
5*	O-ring (head cap & handle)		20	Needle (for .35mm nozzle)	DGR-113-35
6	Packing and nut assembly (PTFE)	DGR-106K	21	Cutaway handle w/pre-set	DGR-114
7	Air valve casing	DGR-107	22*	O-ring (pre-set needle knob)	
8	Air valve kit	DGR-308K	23	Pre-set needle knob	DGR-116
9*	Air valve o-ring		24	1/4 oz.(7 cc) cup and lid	DGR-117
10	Air valve plunger		25	1/3 oz.(9 cc) cup and lid (standard)	DGR-118
11	Air valve spring		26	1/2 oz.(14 cc) cup and lid	DGR-119
12	Air valve nut		27	Cup lid	DGR-120
13	Trigger	DGR-323	28	DAGR repair kit	DGR-121K
15	Needle guide, rocker & spring	DGR-110K	30	O-ring (head cap & handle) kit (5)	DGR-18-K5

TRUCEAN by TRISK DEVILERSS

∃ TRU-CLEAN

- O Non-inverted cup mount
- Washes full paint channel of cup
- Washes outer top thread for cups with threaded lids
- Mount does not damage inside of gravity cups, creating pockets for coatings to build up
- Center mount exhaust port/vent 100mm (4") sizing is compatible with standard paint mixing rooms
- Supports strong, effective volatile extraction when the lid is open
- ORobust & serviceable cleaning nozzle design
- Stainless Steel Washing Bay Construction



SPECIFICATIONS

Weight	30kg (66lbs.)
	H: 1120 mm (44.1")
Dimensions	W: 582 mm (22.9")
	D: 385 mm (15.2")
Air consumption - Auto cycle	<100 I/min (<3.5 cfm)
Air Consumption - Manual Cleaning	210 l/min (7.4cfm)
Avg. Ventilation Air Speed	0.8 m/sec (160ft/min)
Extraction Capacity	10m (33ft) extr. Duct 290m3/h (171cfm)
Air Supply	6 bar (87 psi)
Drum Size	Up to 25L (6.6 gal)
Flushing Media Types	Solvent-Based or Waterborne

Part No

904200





TRU-CLEAN PORTABLE INFRARED UNIT

TRUCURE BY TRISK DEVILLESS

≡ TRU-CURE IR2S, IR3S, IR3L

- Long-life IR lamps
- Easy to properly position lamps with laser guided pyrometer displaying surface temperature readout
- O Stand and unit are sized to cure higher surfaces such as hood and roof
- Upgraded gas piston with long life seals precisely controls set point of upper arm
- IR3S and IR3L contain both dual and single lamp cassettes for easy adjustment and flexibility around curved parts without sacrifice to heat distribution

SPECIFICATIONS

	H: 1480mm (58.3")
Dimensions	W: 607mm (23.9")
	D: 750mm (20.5")
Weight	19kg (41.9 lbs.)
Rated Voltage	220-240 V, 50/60Hz Single Phase, 2000W
Heating Elements	2 quartz, IR short wave emitters
Fuse	16A slow, type C (UK13A) (NA 20A)
Max. Temperature - Operation	40°C (104°F)
Max. Temperature - Storage	70°C (158°F)



Part No	Description
TC-IR2S-02	TRU-CURE IR NO PYROM 2 CS SM STAND UK
TC-IR2S-03	TRU-CURE IR NO PYROM 2 CS SM STAND EU



SPECIFICATIONS


SPECIFICATIONS	
	H: 1630mm (64.2")
Dimensions	W: 607mm (23.9")
	D: 750mm (20.5")
Weight	23kg (50.7 lbs.)
Rated Voltage	220-240 V, 50/60Hz Single Phase, 3000W
Heating Elements	3 quartz, IR short wave emitters
Fuse	16A slow, type C (UK13A) (NA 20A)
Max. Temperature - Operation	40°C (104°F)
Max. Temperature - Storage	70°C (158°F)

Part No	Description
TC-IR3S-02	TRU-CURE IR NO PYROM 3 CS SM STAND UK
TC-IR3S-03	TRU-CURE IR NO PYROM 3 CS SM STAND EU



SPECIFICATIONS

	H: 2600mm (102.4")
Dimensions	W: 870mm (34.3")
	D: 1950mm (76.8")
Weight	47kg (103.6 lbs.)
Rated Voltage	220-240 V, 50/60Hz Single Phase, 3000W
Heating Elements	3 quartz, IR short wave emitters
Fuse	16A slow, type C (UK13A) (NA 20A)
Max. Temperature - Operation	40°C (104°F)
Max. Temperature - Storage	70°C (158°F)





Part No	Description
TC-IR6LT-02	TRU-CURE IR WITH PYROM 6 CS LG STAND UK
TC-IR6LT-03	TRU-CURE IR WITH PYROM 6 CS I G STAND EU





TRUCURE UV-LED by TRISK DEVILEISS



- O Handle is made from glass-reinforced polymer for strong yet lightweight design
- O Includes replaceable air filter, increasing the life of high cost LED
- OProduct is shipped in custom foam molded hard case for storage, with space for extra battery
- OPackaging includes battery, charger, LED unit, spare filter, and UV protective



SPECIFICATION

	UV-LED	BATTERY
Battery Type		Lithium-ion
Voltage	18.5 VDC	18.5 VDC
Max. Current		10 Ampere
Power	100 W	37 Wh / 2Ah
Weight	1.2 kg (2.6lbs)	0.54 kg (0.99lbs)
Operating Temp	0 - +35°C (0 - +95°F)	0 - +35°C (0 - +95°F)
Storage Temp	-20 - +70°C (-20 - +158°F)	"'-20 - +45°C"
Charging Temp		+5 - 40°C (+5 - 104°F)
Wavelength Peak	395 nm	
Degree of Protection	IP 4X	IP 2X

Curing Intensity at 100mm	
Peak	160mW/cm2
Minimum at 120mm diameter	120mW/cm2

Part No	Description
TC-UV-02	TRU-CURE UV-LED UK KIT
TC-UV-03	TRU-CURE UV-LED EU KIT



PRO CLEAN GUN WASH CLEANING MACHINE





- Faster, cleaner and more efficient than conventional gun wash machines.
- Can be used for waterborne and solvent applications.
- Significantly reduces solvent use and wastage dramatically reducing gun cleaning costs.
- Fresh solvent is used every time ensuring no contamination and rapid colour changes.
- The compact unit can be wall mounted to maximise floor space in the mix room.
- ♦ 500ml colour coded waterborne and solvent aerosols are easily clipped in and out of the machine.

PRODUCT One 500ml can will clean up to 32 spray guns.



SAVE TIME:

SAVE COST:

SAVE SPACE:

SAVE WASTE:

H: 900 mm Dimensions W: 245 mm D: 275 mm

Weight 9 kg Max Air Pressure 8 bar (116 psi) Min Air Pressure 6 bar (86 psi) ATEX Safety Approval CE Ex II 3G c IIA T6

PRO CLEAN GUN WASH MACHINE

Part No	Description	
DEV-FHAZ1011	Complete Pro Clean unit	
DEV-FHFZ1004	Pro Clean Waterborne Aerosol (Pack of 12)	
DEV-FHFZ1013	Pro Clean Solvent Aerosol (Pack of 12)	

Less than a minute for a completely clean spray gun

Can be wall mounted to keep the floor space clear

One 500ml can of cleaner will clean up to 32 spray guns

Highly efficient, less than 16 ml of cleaning solution to clean a gun









- ODMG guns multiply their intake by a factor of 7 to give generous air volumes.
- O A fully adjustable aerodry stand provides full dryer flexibility.
- Solvent resistant for cleaning in gun wash machines.
- OMG guns feature intake debris filters and shut-off valves.

PRODUCT A versatile system to speed up the drying process.

SPECIFICATIONS

Air consumption per gun at 3.4 bar (50 psi)

325 l/min (11.5cfm)

Recommended working

2-4 bar (30 - 60 psi)

pressure range

Noise level at 3.4 bar (50 psi) 83 dba



Direction of the control of the cont		1012110
	Part No	Description
	DMG-501-K	Single Air Dryer gun - boxed
	DMG-620	Two gun stand system with hose



ACCESSORIES

	Part No	Description
	DMG-5-K3	Pack of 3 dryer inlet filters
	DMG-520-K	Air dryer stand and hose
	H-6086	10m Air hose with female quick detach and swivel/loose nut fittings
MPV-424 Female, self sealing, QD air line		Female, self sealing, QD air line fitting
	MPV-5	Male stem, QD air line fitting with 1/4" BSP (F)



DGI PO by DEVILBISS

∃ DGI PRO POD

- Perfectly positioned for easy checking.
- Accurate digital "bar" read-out of working pressure.
- Optimise your gun performance as you work.
- Accurate readings to within 0.05 bar (0.7 psi).
- Fully ATEX Approved totally gun washer safe.
- Fitted in minutes replaces standard spreader valve.

PRODUCT

valve adjusts the gauge.



SPECIFICATIONS

Air Connections (M & F) 1/4" Universal (BSP/NPS)

Accuracy	+ or - 1%
Resolution steps	0.05 bar (0.7 psi)
Max static inlet pressure	12 bar (175 psi)
Housing	Die cast aluminium, nickel/chrome plated
Readout window	Toughened glass
ATEX safety approval	CE Ex 11 1G EEx ia IIC T4

all GTi Pro LITE models)

Part No	Description
704426	Digital gauge - Retrofit to DV1 guns only
DGIPRO-503-BAR-K	DGi PRO pod gauge - Retrofit to GTI Pro guns only
DGIPRO-504-BAR-K	DGi PRO pod gauge - Retrofit to GTI Pro LITE guns only

Part No	Description
SN-52-K5	DGI Pro adjusting valve seals
MPV-60-K3	Male quick detach swivel
SN-57-K5	Air inlet aperture inserts



(For Pre-2016 GTi Pro)



SNAP NFLOW by DEVILEISS APPENDING APPENDING

≡ SNAP N FLOW

- Requires fewer steps.
- O Improves color matching.
- O Minimizes paint usage.
- O Creates less mess and quicker cleanup.
- Provides easy paint storage options.
- Offers greater savings on materials and time.

SNAP N FLOW™ COMPONENTS

Contact your distributor about which $\mathit{SNAP}\ \mathit{NFLOW}^{\mathsf{TM}}$ products are right for you.

right for your	
Description	Model Number
Demo Kits	
125 Micron Demo Kit	SNF-601
200 Micron Demo Kit	SNF-602
Small Jobs	
15 oz. Disposable Mixing Cup (100)	SNF-15-K100
15 oz. 125 Micron Lid (48)	SNF-431-K48
15 oz. 200 Micron Lid (48)	SNF-432-K48
15 oz. Flat Storage Lid (50)	SNF-22-K50
Large Jobs	
32 oz. Disposable Mixing Cup (100)	SNF-32-K100
32 oz. 125 Micron Lid (48)	SNF-421-K48
32 oz. 200 Micron Lid (48)	SNF-422-K48
32 oz. Flat Storage Lid (50)	SNF-8-K50
Accessories	
Plugs (8)	SNF-9-K8
Shaker Ring Kit	SNF-21-K2
Adapters	
DeVilbiss®, Binks®, Sharpe	SNF-43
DeVilbiss® SRI, Binks® Cub	SNF-23
FinishLine® G2, G3, G4	SNF-31
StartingLine®	SNF-64
StartingLine®, Sharpe Finex	SNF-81
3M	SNF-500
Accuspray	SNF-26
Accuspray 2.0 Disposable Head	SNF-87
Accuspray DispHd	SNF-85
Iwata SuperNova, W300	SNF-78
Sagola	SNF-13
Sata Full QCC and Threaded	SNF-504
Sata Minis QCC and Threaded	SNF-502
Sata NR2000 & RP	SNF-10
Sata NR95, Iwata	SNF-11





PRODUCT

A versatile system

to speed up the

drying process.

SEE IT IN ACTION

Scan the QR code to watch a video on how to use $SNAP\ N\ FLOW^{\text{\tiny M}}.$

Learn more about *SNAP N FLOW*™ at *snapnflow.com*.



DEKUPS by DEVILEISS AUTOMOTIVE REPINISALING

DEKUPS

- Oconsistent paint flow, reduced risk of spray performance changes.
- Practical 710cc size gives ideal weight to quantity ratio.
- Ochoice of disc filters for waterborne basecoats or washable stick filters for clears and primers.
- Supplied in convenient wall mounting dispenser packs.
- C Lightweight gun adaptor with spiral lock mechanism.
- O No threads on outer cup lids to get contaminated and stubborn.
- Storage plugs for liners supplied in the kit.
- Funnels for liner top ups and gun flushing bottles available.



Part No	Description
DPC-601	DeKups disposable cup system kit 32 disposable liners, 32 disposable lids
DPC-606	Reusable lid and sleeve kit
DPC-602	9oz. disposable lids & liners
DPC-607	9oz. re-usable lid & sleeve kit







Part No	Description
DPC-10	Adaptor for SATA NR 2/3000, RP, KLC, MCB & Jet 90 series & Sata 96719
DPC-11	Adaptor for SATA NR95, Iwata LPH-400 & W400LV
DPC-13	Adaptor for Sagola (DeKup)
DPC-23	Adaptor 9oz - for SRI PRO
DPC-502	Adaptor for SATA Minijet QCC
DPC-78	Adaptor For Iwata Supernova
DPC-43	Adaptor for DeVilbiss DV1, Pro LITE, GTi, PRI, GFG, Binks M1G, Sharpe Cobalt, Platinum & Titanium
DPC-501	Adaptor for SATA QC
DPC-42-K24	Disc Filter Kit - 125 micron filter screen
DPC-27-K10	Stick Filter - 200 micron filter screen
DPC-65-K24	9.oz 125 micron Disc Filter (24 Pack)
DPC-6-K10	Plug Kit (Pack Of 10)
DPC-22-K3	Disposable funnel
DPC-8-K2	Cleaning Bottle
DPC-60-K10	9oz. Measuring Guide (10 Pack)
DPC-62-K10	Measuring guide 2:1 & 3:1
DPC-63-K10	Measuring guide 4:1 & 5:1

DEVILBISSCLEAN...

ANTI-STATIC WIPE

Single-use treated wipe to eliminate static between refinish coats.



Part No Description DC-ASW-K12 Box of 12 individually packed Anti-Static Wipers

BENEFITS

- Reduces dirt imperfections on plastic parts caused by static.
- Lint free. ONO VOCs.

EASY TO USE

Simply wipe over the entire panel before spraying.

INNOVATIVE

 Improved metallic orientation from reduction of static charges which can cause metallics to orientate incorrectly.

DIRECTIONS FOR USE

- NOTE: For best results, the wipe must make contact with entire surface to be sprayed. USE DRY ONLY.
- Carefully wipe the entire surface to be sprayed with the DeVilbiss CLEAN™ Anti-Static Wiper
- 2) For best results, use even, firm, overlapping strokes as if you were spraying the surface.

BUMPER PREP PAD

Single-use pre-saturated scuff pad for new unprimed bumpers & plastic parts.

DEVILB	ISS PROPERTY	9
	DEVILBIS	DEVILBISS BURNINGS PRACE PRACE
		THE CLEAN THE PARTY OF THE PART
	1	Z

Part No	Description
DC-BPP-K12	Box of 12 individually packed Bumper Prep Pads

BENEFITS

- Reduces steps in bumper preparation processes, increasing efficiency.
- OProvides comprehensive abrasion for better paint adhesion.
- Removes water-based and oil-based contaminants.

EASY TO USE

- O DeVilbiss CLEANTM Bumper Prep Pad cleans, abrades and degreases in one easy step.
- Simply soak in water to activate the pad and start prepping your bumper.

INNOVATIVE

- The Bumper Prep Pad provides a more consistent scratch pattern and greatly improves paint adhesion.
- Additional preparation products may not be needed as the Bumper Prep Pad cleans, abrades, and degreases in one easy step.

OVERALLS



Part No	Description
DC-OV-M	Medium overall
DC-OV-L	Large overall
DC-OV-XL	Extra large overall
DC-OV-XXL	Extra extra large overall

BENEFITS

- Duilt in hood with pull cords.
- O Vented under arm and back.
- Front and rear pockets with Velcro fastening.
- Elasticated waistband and cuffs for improved fit and operator comfort.
- Front knee pockets with Velcro fasteners for insertion of kneeling pads.
- Full length zip front fastening.
- Anti Static.
- 1 int Free
- Lightweight and comfortable to wear.
- 🔾 Reusable.
- 🔾 Washable.

THE HIGH EFFICIENCY CONSUMABLES RANGE

BOOTH WALL COAT

Spray-on and peelable protective coating for booth walls and doors.

BENEFITS

- The bright, white sprayable coating protects booth walls from overspray, helping to ensure clean, inclusion free paint jobs.
- Sooth Wall Coat will last up to 6 months (maximum 500 bake cycles) before requiring removal and reapplication.
- O Non sticky, will not shrink and doesn't crack.

EASY TO USE

- Dooth walls don't have to be clean, just dry and clear of any washable coatings.
- Ouick and easy to apply with a 1.8mm or larger gravity feed spray gun or 1.5mm or larger pressure feed gun.
- Masking is unnecessary if using Clear Glass Coat. Simply trim out the peelable Booth Coat from windows with a blade and spray Clear Glass Coat over.

INNOVATIVE

- OBooth Wall Coat can be peeled off quickly and easily in large strips for ease of removal.
- O Thanks to its water-based formulation, the spray gun can be cleaned in warm water.
- O Booth Wall Coat is easy to touch up periodically to help keep the booth looking clean.

Maintaining a clean spray booth is vital to help ensure clean, inclusion free paint jobs, reducing or even eliminating the time and product wasted on paintwork rectification.

A clean, bright spray booth provides the perfect environment for the professional refinisher to achieve perfect blends and finishes.

Part No	Description
DC-BWC-K	Complete kit to spray entire booth including windows. 4×600 booth Wall Coat (3.78 litres each), 1×600 bottle of Clear Glass Coat (0.94 litres)



CLEAR GLASS COAT

Spray-on and truly peelable protective coating for glass surfaces.

BENEFITS

- 🐧 The clear sprayable coating protects indoor glass surfaces from overspray, helping to ensure clean, inclusion free paint jobs.
- © Clear Glass Coat will last up to 12 months (maximum 500 bake cycles) before requiring removal and reapplication.
- O Non sticky, will not shrink and doesn't crack.

EASY TO USE

- O Booth glass should be clean, dry and clear of any washable coatings.
- CEnsure the booth air is on. An ambient temperature of 20 25°C is ideal.
- Quick and easy to apply. Just one medium, wet coat will provide an acceptable coating. A thicker coat will make removal even easier

INNOVATIVE

- Oclear Glass Coat can be peeled off in large strips for ease of removal.
- Thanks to its water-based formulation, the spray gun can be cleaned in warm water.

Maintaining a clean spray booth is vital to help ensure clean, inclusion free paint jobs, reducing or even eliminating the time and product wasted on paintwork rectification.

A clean, bright spray booth provides the perfect environment for the professional refinisher to achieve perfect blends and finishes.







≡ PRO VISOR

- Oun supply hose swivels both radially and laterally, ensuring better spray dynamics without the hose restricting the movement of the sprayer.
- The Pro Visor disperses breathing air gently around the lightweight visor at a positive pressure with no misting or discomfort, ensuring every sprayer can work
- The wrap around visor provides excellent and much wider peripheral vision than sprayers will be used to, while the removable peak can help reduce glare from
- O A whistle is incorporated to warn the operator that an insufficient quantity of breathing air is being supplied to the Pro Visor.



Left or right sided waist belt fitment without having to change the air fitting configuration.

SPECIFICATIONS

Protection APF = 40 / NPF = 200 Carbon Filter Life 3 months Supply Pressure 4.0 bar (60 psi) minimum to 7.0 bar (100 psi) maximum Air Flow Rate 160 - 220 l/min (5.7 - 7.8 SCFM) Noise level @ 220 I/min PPE directive 89/686/EEC. Conforms to EN 14594:2005 Class 3A Approvals Zone Classifications Suitable for use in Zones 1 and 2 Hazardous Areas (gas groups IIA)

PRO VISOR OUTFIT

Part No	Description
PROV-650	Complete air fed visor outfit with waistbelt

Part No	Description
PROV-37-K	Belt & regulator
PROV-21-K	Peak
PROV-36-K10	Peel off visors pack of 10
PROV-36-K50	Peel off visors pack of 50
PROV-51-K	Belt and buckle assembly
PROV-38-K	Rigid Acetate visor, face seal and breathing air tube
PROV-26-K	Storage bag
PROV-27-K4	Filter element (pack of 4)
PROV-52-K2	Lint-free brow band (pack of 2)
PROV-41-K	Visor head piece & breathing air tubeé
PROV-30-K	Spacer, stud & knob (set of all sizes)
PROV-31-K	Filter cap & seal
PROV-32-K	Y-piece assembly
PROV-42-K	QD connector
PROV-406-K	Gun hose (1.2 m)
H-6085-QD	10 metre length air-hose complete with male and female QD's
H-6065	10 metre length air hose complete with re-usable fittings.
MPV-424	Female self-sealing, QD air line fitting
MPV-10	Male-stem, QD air line fitting with 1/4" BSP (M)
MPV-5	Male-stem, QD air line fitting with 1/4" BSP (F)
MPV-462	Female self-sealing QD fitting with 1/4" BSP (F)
MPV-463	Kit of 4 QD's fittings (2 male and 2 females)






PROV-21-K





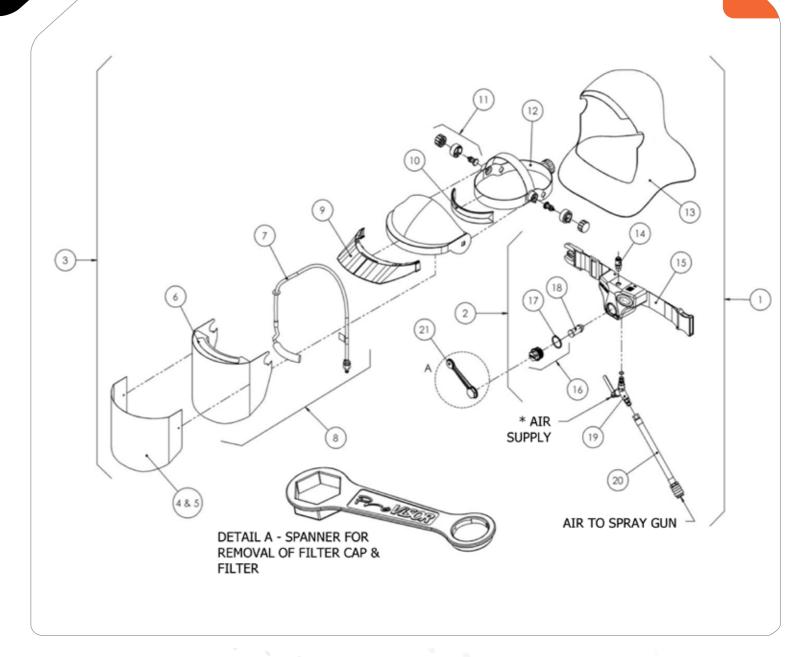

Ref No	Description	Part No		
1	Pro-Visor Complete Unit	PROV-650	12	Adjustable Headpiece
2	Belt And Regulator	PROV-37-K	13	Hood
3	Visor Head Piece & Breathing Air Tube	PROV-41-K	14	QD Connector
4	Tear-Off Visors Pack of 10	PROV-36-K10	15	Belt and Buckle
5	Tear-Off Visors Pack of 50	PROV-36-K50	16	Filter Cap & Seal
6	Rigid Acetate Visor & Face Seal	PROV-17-K	17	Filter Cap Seal (Pack of 4)
7	Breathing Air Tube Complete	PROV-24-K	18	Filter Element (Pack of 4)
8	Rigid Acetate Visor, Face Seal And	PROV-38-K	19	Y-Piece Assembly
0	Breathing Air Tube	PROV-30-N	20	1.2m Hose (To Spray Gun)
9	Peak	PROV-21-K	21	Spanner for Filter & Cap
10	Lint Free Brow Band (Pack of 2)	PROV-52-K2	22	Storage Bag (not shown)
11	Spacer, Stud & Knob (Set of All Sizes)	PROV-30-K		

HOSES

Ref No	Description	Part No
	10M Air Hose - 5/16"ID Male & Female QD's	H-6085-QD
	10M Air Hose - 5/16"ID, 1/4" BSP G Swivel	H-6065

2	Adjustable Headpiece	PROV-40-K
3	Hood	PROV-39-K
4	QD Connector	PROV-42-K
5	Belt and Buckle	PROV-51-K
6	Filter Cap & Seal	PROV-31-K
7	Filter Cap Seal (Pack of 4)	PROV-34-K4
8	Filter Element (Pack of 4)	PROV-27-K4
9	Y-Piece Assembly	PROV-32-K
0	1.2m Hose (To Spray Gun)	PROV-406-K
21	Spanner for Filter & Cap	SPN-12-K
2	Storage Bag (not shown)	PROV-26-K





≡ PRO AIR - 1

- O Rolling diaphragm gives rapid response and sensitive air pressure control.
- Maximum airflow 3500 l/min (124 cfm).
- Two ball valve controlled outlets.
- Tamperproof, removable and lockable air pressure control knobs.

SPECIFICATIONS

Air Inlet Thread	1/2" BSP female
Regulated Outlets	2 Valved
Unregulated Outlets	N/A
Air Outlets (Ball Valves)	1/ 4" BSP (M)
Width (Overall)	185mm (7.2")
Height (Overall)	280mm (11")
Weight	2300 gms (81oz)
Capacity (maximum air flow)	3500 I/min (124 cfm)
Maximum Air Inlet Pressure	0-8 bar (0-116 psi)
Maximum Regulated Outlet Pressure	1/ 4" BSP (M)
Maximum Operating Temperature	80°C (176°F)
Pressure Gauge	0-11 bar (0-160 psi)
Gauge port	1/8" BSP (F)
Degree of Filtration (Output air quality class ISO8573-1)	3.7.4 (Down to 5 microns)
Drain Valve	Semi-Automatic
Maximum Pressure Drop	5% of Inlet Pressure


PRO AIR-1 REGULATOR

Part No	Description
PROAIR-1	2 Outlet Filter Regulator
DV-9420601	Filter bowl removal tool

Ref No	Description	Part No
1	Upper Cover Assembly	PROAIR-71
2	Filter (Air)	PROAIR-51
3	Metal Filter Bowl	PROAIR-72
4	Ball Valve	SER-3414-MF
5	Pressure Gauge	GA-319





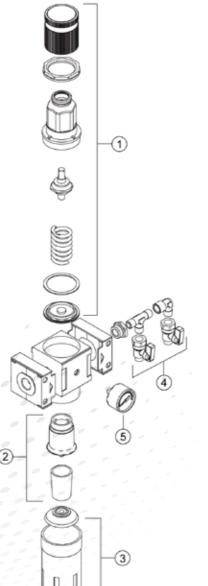





≡ PRO AIR - 2

- O High air flows for conventional and compliant spray guns.
- OProvides air filtered to 0.01 microns suitable for air-fed respiratory outfits.
- Maximum airflow of 900 l/min (32 cfm).
- OROlling diaphragm gives rapid response and sensitive air pressure control.

SPECIFICATIONS

Air Inlet Thread:	1/2" BSP female
Regulated Outlets	2 Valved
Unregulated Outlets	N/A
Air Outlets (Ball Valves)	1/ 4" BSP (M)
Width (Overall)	330mm (12.9")
Height (Overall)	280mm (11")
Weight	3375 gms (119 oz)
Capacity (maximum air flow)	900 I/min (32 cfm)
Maximum Air Inlet Pressure	13 bar (189 psi)
Maximum Regulated Outlet Pressure	0-8 bar (0-116 psi)
Maximum Operating Temperature	80°C (176°F)
Pressure Gauge	0-11 bar (0-160 psi)
Gauge port	1/8" BSP (F)
Degree of Filtration	1.7.2
(Output air quality class ISO8573-1)	(Down to 0.01 microns *)
Drain Valve	Semi-Automatic
Maximum Pressure Drop	10% of Inlet Pressure


^{*} Suitable for Breathing Air

PRO AIR-2 REGULATOR

Part No	Description
PROAIR-2	2 Outlet Filter Regulator Coalescer
DV-9420601	Filter bowl removal tool

Ref No	Description	Part No
1	Upper Cover Assembly	PROAIR-71
2	Filter (Air)	PROAIR-51
2a	Filter Element Only	-
3	Metal Filter Bowl	PROAIR-72
4	Ball Valve	SER-3414-MF
5	Pressure Gauge	GA-319
6	Fine Filter (Oil)	PROAIR-52
7	Isolation Valve	DV-8000035
8	Filter Kit (Includes Items 2, 6)	PROAIR-62



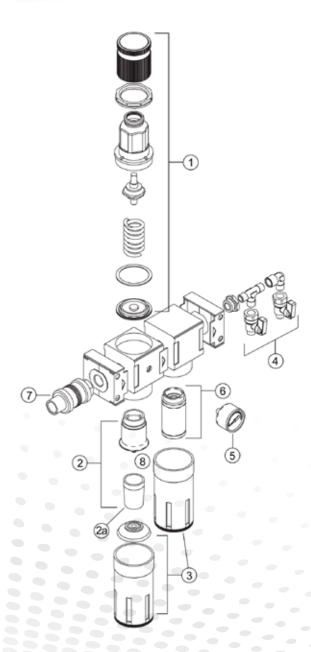



- For conventional and compliant spray guns.
- Provides air filtered to 0.01 microns suitable for air-fed respiratory outfits.
- Activated carbon filter removes oil carry over to 0.003 microns.
- Maximum airflow of 900 I/min (32 cfm).
- OROlling diaphragm gives rapid response and sensitive air pressure control.

SPECIFICATIONS

Air Inlet Thread:	1/2" BSP female	Two ball valve		
Regulated Outlets	2 Valved	controlled		
Unregulated Outlets	N/A	outlets.		
Air Outlets (Ball Valves)	1/ 4" BSP (M)			
Width (Overall)	395mm (15.5")			
Height (Overall)	280mm (11")			
Weight	4205 gms (165 oz)			
Capacity (maximum air flow)	900 l/min (32 cfm)			
Maximum Air Inlet Pressure	13 bar (189 psi)			
Maximum Regulated Outlet Pressure	0-8 bar (0-116 psi)			
Maximum Operating Temperature	80°C (176°F)			
Pressure Gauge	0-11 bar (0-160 psi)			
Gauge port	1/8" BSP (F)			
Degree of Filtration	1.7.1			
(Output air quality class ISO8573-1)	(Down to 0.003 microns *)			
Drain Valve	Semi-Automatic			
Maximum Pressure Drop	10% of Inlet Pressure			


^{*} Suitable for Breathing Air

PRO AIR-3 REGULATOR

Part No	Description
PROAIR-3	2 Outlet Filter Regulator Coalescer with activated carbon filter
DV-9420601	Filter bowl removal tool

Ref No	Description	Part No
1	Upper Cover Assembly	PROAIR-71
2	Filter (Air)	PROAIR-51
2a	Filter Element Only	-
3	Metal Filter Bowl	PROAIR-72
4	Ball Valve	SER-3414-MF
5	Pressure Gauge	GA-319
6	Fine Filter (Oil)	PROAIR-52
7	Isolation Valve	DV-8000035
8	Activated Carbon Filter	PROAIR-53
9	Filter Kit (Includes Items 2, 6, 8)	PROAIR-63



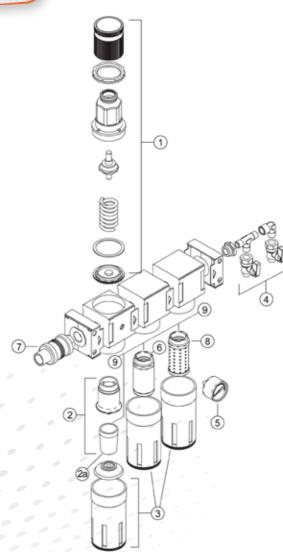

≡ PRO AIR - 4

- For conventional and compliant spray guns.
- OProvides air filtration to a particle size of 5 microns.
- The unit has a generous capacity of 90 cfm.

PRODUCT

The unit has a generous capacity of 90 cfm.

SPECIFICATIONS

Air Inlet Thread:	1/2" BSP female
Regulated Outlets	2 Valved + 1 Plugged
Unregulated Outlets	1 Valved + 1 Plugged
Air Outlets (Ball Valves)	1/ 4" BSP (M)
Width (Overall)	290mm (11.5")
Height (Overall)	280mm (11")
Weight	2950 gms (104 oz)
Capacity (maximum air flow)	2550 I/min (90 cfm)
Maximum Air Inlet Pressure	13 bar (189 psi)
Maximum Regulated Outlet Pressure	0-8 bar (0-116 psi)
Maximum Operating Temperature	80°C (176°F)
Pressure Gauge	0-11 bar (0-160 psi)
Gauge port	1/8" BSP (F)
Air Filtration	Down to 5 microns
Drain Valve	Semi-Automatic
Maximum Pressure Drop	5% of Inlet Pressure

^{*}Not suitable for use in low bake spray booths.


PRO AIR-4 REGULATOR

DV-9420601

Part No	Description
PROAIR-4	3 Outlet Filter Regulator Coalescer (1 filtered, 2 filter regulated)

Filter bowl removal tool

Ref No	Description	Part No
1	Upper Cover Assembly	PROAIR-71
2	Filter (Air)	PROAIR-51
2a	Filter Element Only	-
3	Metal Filter Bowl	PROAIR-72
4	Ball Valve	SER-3414-MF
5	Pressure Gauge	GA-319

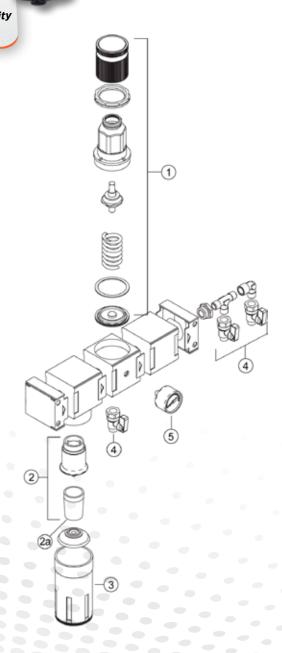

≡ PAINT CUPS

\equiv ECONOMY REGULATORS

FLFR-1 FILTER REGULATOR

- Air filtration down to 20 microns.
- O High quality manufacture.
- Air flow of 70cfm (at 7 bar 100 psi inlet pressure).
- O Lockable and removable (tamperproof) control



FLRC-1 - FILTER REGULATOR COALESCER

- Compact, low cost single operator Filter Regulator and Coalescer.
- Filtration down to 0.01 microns suitable for air mask or visor



FLCF-1 COALESCING FILTER

- A 3/8" (port size) coalescing (fine oil) filter.
- Air filtration down to 0.01 microns.
- Replaceable filter element.
- Maximum working pressure 18 bar (260 psi).



FLRCAC-1 FILTER REGULATOR COALESCER WITH ACTIVATED CARBON FILTER

- High efficiency filter designed to remove dirt, liquid oil and water from spraying and breathing air.
- Filtration down to 0.01 microns plus activated carbon filter removing contaminants down to 0.003 microns.



REGULATOR ASSEMBLIES

Part No	Description
FLFR-1	Single outlet Filter Regulator (70cfm)
FLCF-1	Coalescing (fine oil) filter (25cfm)
FLRC-1	Single outlet Filter Regulator Coalescer
FLRCAC-1	Single outlet filter regulator coalescer with activated carbon filter
XA-12	Replacement coalescing filter element (FLRC + FLRCAC)

AC-12	Replacement activated carbon filter (FLRCAC)
9450802	Upper Cover (All)
9450301	Metal Bowl (All)
GA-319	Gauge (FLFR+ FLRC+ FLRCAC)
9450102	Replacement filter element (FLFR, FLRC, FLRCAC)

GRAVITY FEED CUPS

Par No	Description
GFC-501	568ml (1 Pint) Acetal gravity cup for GTi Pro, GTi Pro LITE, GFG & GPi
905359	Gravity Cup Aluminium 1I
KGP-509-1	284ml (1/2 Pint) Nylon gravity cup for GFG
SRi-510	125ml Acetal gravity cup for SRi Pro LITE
GFC-515	568ml (1 pint) black UV gravity cup. Compatible with DV1
SRi-42-K3	Pack of 3 cone filters
GFC-402	Lid assembly for GFC-501 gravity cup
KGP-401	Lid assembly for KGP-509 gravity cup
GFC-17-K5	Washer
GFC-2-K5	Pack of 5 drip check lids
KGP-5-K5	Pack of 5 gravity cup strainers for GFC-501 & KGP-509
SRi-8-K6	Pack of 6 lids for SRi gravity cups
KR-459-K5	Mini cups
GFC-404-K2	Disposable Lid Kit (GFC-502)
SLG-450	Gravity Cup for SLG-610/620



SUCTION FEED CUPS

Par No	Description
905353	1 litre standard suction cup and lid assembly for
906358	Cup only - 1 litre suction cup
905357	Suction cup lid assembly for JGA cups
905355	Pack of 5 drip free diaphragms
905354	Pack of 3 Tri-Seal gaskets for KR suction cups
KR-566-1-B	Cup 1L suction drip free
KR-466-K	Cup only 1L suction feed
KR-4001-B	Cup lid assembly suction
KR-115-K5	Diaphragms kit of 5
KR-11-K3	Cup gaskets kit of 3
KR-69-K3	Pack of 3 Leather gaskets for suction cups
KR-483-K10	Kit of 10 mesh KR cup strainers – to fit $7/16$ " tube, 115 Micron
KR-484-K10	Kit of 10 mesh KR cup strainers – to fit 7/16" tube, 350 Micron





- O High Flow Air Hose with Connections.
- C High air flow, high quality rubber air hose.
- 3 8mm (5/16") bore ideal for use with conventional, compliant / HVLP spray guns, air fed breathing equipment and other air tools.



Option 1

10 metre length air hose complete with quality chrome replaceable 1/4" swivel nut female fittings either end.

Part No: H-6065



Option 2

10 metre length air hose complete with crimped female quick detach connection at one end and crimped male QD fitting at the other end.

Part No: H-6085-QD



Option 3

10 metre length air hose complete with crimped female quick detach connection at one end and crimped female loose nut fitting at the other end.

Part No: H-6086

O HIGH FLOW AIR HOSE ASSEMBLIES

Red rubber air hose assemblies including 1/4" BSP connections



Par No	Description
H-7501HA-1.2	1.2 metre, 5/16"ID Air Hose Assembly - For KBII
H-7501HA-5	5 metre, 5/16"ID Air Hose Assembly
H-7501HA-7.5	7.5 metre - 5/16"ID Air Hose Assembly

Par No	Description
H-7501HA-10	10 metre - 5/16"ID Air Hose Assembly
H-7501HA-15	15 metre - 5/16"ID Air Hose Assembly
H-7502HA-7.5	7.5 metre - 3/8"ID Air Hose Assembly
H-7502HA-10	10 metre - 3/8"ID Air Hose Assembly
H-7502HA-15	15 metre - 3/8" ID Air Hose Assembly

Air Hose Connections

Part No: P-HC-4527 1/4" BSP Female (8mm (5/16") hose bore) Part No: P-HC-4528 1/4" BSP Female (9.5mm (3/8") hose bore)

OFLUID HOSE ASSEMBLIES

Black rubber fluid hose assemblies including 3/8" BSP connections

8	7		3
		-	
		773	

	Par No	Description
	H-7503HA-1.45	1.45 metre 1/4" ID Fluid Hose Assembly - For KBII
	H-7503HA-5	5 metre 1/4" ID Fluid Hose Assembly
	H-7503HA-7.5	7.5 metre 1/4" ID Fluid Hose Assembly

Par No	Description
H-7503HA-10	10 metre 1/4" ID Fluid Hose Assembly
H-7503HA-15	15 metre 1/4" ID Fluid Hose Assembly
H-7504HA-5	5 metre 3/8" ID Fluid Hose Assembly
H-7504HA-10	10 metre 3/8" ID Fluid Hose Assembly
H-7504HA-15	15 metre 3/8" ID Fluid Hose Assembly

Fluid Hose Connections

Part No: P-HC-4543 3/8" BSP Female (6mm (1/4") hose bore) Part No: P-HC-4548 3/8" BSP Female (9.5mm (3/8") hose bore)

QUICK DETACH FITTINGS

- O High flow connections minimal pressure drops
- Oldeal for spray guns, respirators, hoses and regulators

MPV-5 - Male quick detach stem with 1/4" female fitting:

MPV-424 - Female guick detach connection with 1/4" male fitting:

MPV-10 - Male quick detach stem with 1/4" male fitting:

MPV-462 - Female quick detach with 1/4" female fitting:

MPV-463 - Economy pack, includes 1 of each shown in the picture to the right:

MPV-60-K3 - Male guick detach Uni Swivel stem with 1/4" female fitting:





- Easy to use, disposable mixing cups
- Made from solvent resistant clear polypropylene
- Calibrated with a 0-600 volumetric measurement scale

Part No: MC-1-K50 Pack of 50 cups

Part No: MC-1-K1000 Pack of 1000 cups

Part No: MC-2-K50 Pack of 50 lids Part No: MC-2-K1000 Pack of 1000 lids



IN-LINE AIR FILTERS

- Lightweight, gun mounting air filter
- O High efficiency action traps water, oil and dirt
- O Tough solvent resistant acetal housing with 1/4" threads

Part No: HAF-507



- Fits neatly in-line at the gun air inlet
- O Increase or decrease working pressure at the gun
- Calibrated up to 11 Bar (160 psi)

Part No: HAV-501-B



VISCOSITY CUPS

- The fast, simple way to check out paint viscosity
- O Tough durable and easy to clean
- O Precision metal drain out insert

Part No: 7000-114-K2 Pack of 2 viscosity cups



GUN CLEANING BRUSHES

- Oldeal for a variety of gun cleaning jobs
- Tough resilient bristles for useful service
- Suitable size for cleaning most parts of the gun

Part No: 4900-5-1-K3 Pack of 3 brushes



PROFESSIONAL SPRAY GUN CLEANING KIT

- O Handy tool wrap style kit of purpose made cleaning brushes and tools
- O Includes cleaning instructions and spray gun oil
- Keeps your spray guns in top working order

Part No: KK-4584



SPRAY GUN SERVICE KIT

Spray gun service/repair kit for GTIPRO and SRIPRO Part Nos: 905279 - Service kit



GUN LUBE

Pack of 10 gun lube sachets. Part No: GL-1-K10

DGI PRO POD

- Perfectly positioned for easy checking
- O Accurate digital "bar" read-out of working pressure
- Accurate readings to within 0.05 bar (0.7 psi)

Part No: 704426 (for DV1)

Part No: DGIPRO-504-BAR-K (for GTi Pro and GTi Pro LITE)

Part No: DGIPRO-503-BAR-K (for Pre-2016 GTi Pro LITE)



NOTE



GRAVITY GUN STANDS

- Stable metal workbench gun stands
- Choice of 2 stands for 3 gravity guns or a single gun
- Single gun stand is ideal for SRi guns and full size guns

Part Nos: GGS-1 - 3 gun stand

GFV-50-F - single gun stand




SUCTION CUP FILTERS

- Onvenient, easy fit suction cup paint filters
- Keeps spray gun passages clear
- Removes dirt, flakes and scum

KR-484-K10

51 mesh filter screen (general purpose)

KR-483-K10





DRIP-FREE DIAPHRAGMS

- OPrevents suction cup leaks and vent hole blockages
- Allows the cup to be used at angles
- Fits snugly under the cup lid

Part No: 905355 (Pack of 5)



GRAVITY CUP FILTERS

- Effectively removes dirt, flakes and scum
- Keeps the finish blemish free
- Resistant to most solvents easily cleaned

Part No: 905207 - Pack of five filters



SUCTION CUP LID GASKETS

- Ready to use, purpose fit suction cup lid seals
- Ochoose between Tri-Seal or traditional leather gaskets

Fits all DeVilbiss KR type suction cups

905354 Tri-seal gaskets KR-69-K3 Leather gaskets



Part Nos:

SPOT POTS

- © 0.5 litre capacity nylon cup insert cuts down on costly paint mixes
- O Tapered base ensures that minimal quantities of paint can be utilised
- Quickly and easily cleaned for frequent colour changes
- Fits all 1 litre capacity KR type suction cups

Part No: KR-110-K3





글 квіі

- O Aluminium or stainless steel options (for waterbase materials).
- Familiar gun grip handle plus belt hook for operator convenience.
- At-the-job controls with lid mounted pressure gauge.
- O Available complete with short cup to gun air and fluid hoses.
- KB disposable liners make cleaning and colour changes fast and simple.



PRODUCT

2.3 litres capacity. Greater

area coverage, less refills.

SPECIFICATIONS

Air Inlet and outlet connections threads	1/4" BSP (M)
Fluid outlet connection (to spray gun)	3/8" BSP (M)
Maximum working pressure	2.1 Bar (30 psi)
Maximum air supply pressure	8.6 bar (125 psi)
Height	183 mm
Weight (less hoses)	1.76 kg
Cup Capacity	2.3 litres

SPRAY GUN KITS FOR USE WITH KBII

	Par No	Description
	905145 to 905156	Prolite Pressure High Efficiency Gun Kit
	905100 to 905117	Prolite Pressure Conventional Gun Kit
Kit contents are spray gun. (suction cup with		y gun. (suction cup with filter if appropriate). Torx key.

Kit contents are spray gun, (suction cup with filter if appropriate), Torx key, brush and multi-fit spanner


** = Air Cap / *** = Fluid Tip

KBII REMOTE CUP KITS

Par No	Description
KB-522	Aluminium Remote Cup without hoses
KB-522-SS	Stainless Steel Remote Cup without hoses
KB-622	Aluminium Remote Cup complete with air and fluid hoses

ACCESSORIES


Par No	Description
KB-422	Aluminium 2.3 Litre KBII Spare Cup Only for KB-522
KB-442	Stainless Steel 2.3 Litre KBII Spare Cup Only for KB-522-SS
KK-5051	Kit of 20 disposable liners plus lid diaphragms
H-7501HA-1.2	1.2m Air Hose Assembly with BSP Fittings
H-7503HA-1.45	1.45m Fluid Hose Assembly with BSP Fittings
GA-355	Air Pressure Gauge for KBII - 0-30 psi



KK-5051



KB-422

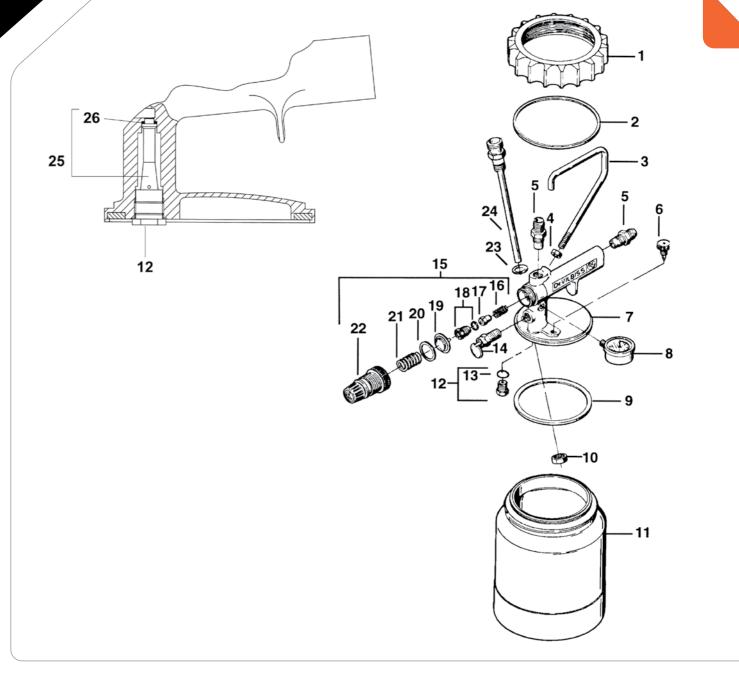

Ref No	Description	Part No
1	Retaining Ring	KB-64
2	Slip Rings	KB-81-K5
3	Handle	KB-74
4	CD Nut	-
5	Connector 1/4" BSP	JGA-158
6	Pressure Relief Valve	KB-66
7	Lid	Not available
8	Gauge	GA-355
9	Seal	KB-80-K5
10	Locknut (KB-522) kit of 5	MBD-11-K5
	Cup - Aluminium (KB-522)	KB-422
11	Cup - Stainless Steel (KB-522-SS)	KB-442
12	Check Valve kit of 3	KB-432-K3
13	Seal kit of 5	KB-85-K5

14	Safety Valve	TIA-4355
15	Regulator Assembly	KB-428-1
16	Spring	-
17	Valve	-
18	Valve Seat and Seal	-
19	Diaphragm	-
20	Slip Ring	-
21	Spring	-
22	Bonnet	-
23	Seal kit of 6	KB-60-K6
	Tube Assembly 3/8" BSP (KB-522-B)	KK-4997
24	Tube Assembly 3/8" BSP STS (KB-522-SS)	KK-4996
25	Check Valve and Seal Assembly	KB-444
26	Seal kit of 5	KB-101-K5

HOSE & FITTINGS

1.2m Air Hose Assembly with BSP Fittings	-H-/501HA-1.2
1.45m Fluid Hose Assembly with BSP Fittings	-H-7503HA-1.45

DX PUMPS by DEVILEISS

≡ DX PUMPS

- Acetal pump body with stainless steel balls and soft seats for universal paint compatibility.
- The unique diaphragm design and "built in" fluid regulator provide consistent pressure and readily adjustable paint flow.
- The Non-stall air valve provides smooth, quiet and surge free paint delivery up to 1000 cc/minute.
- Clearly labelled Air regulators provide independent control of pump and spray gun fluid and air pressures.
- Re-circulation/dump valve accessory for faster colour changes reducing down time, saving time and money.
- Pump outfit mountings include Cart, Wall and Tripod outfits with or without spray guns & hoses.



SPECIFICATIONS

	Pump Ratio	1 to 1
	Max. Air Pressure	7 Bar / 100 psi
	Max. Fluid Pressure	7 Bar / 100 psi
	Nominal Flow Volume / Cycle	0.07 Litres (0.018 US Gall)
	Fluid Output @ 60 cycles/min	4.2 Litres / min (1.1 US Gall / min)
	Max Recommended Continuous Cycle Rate	10 Cycles /min
	Max Recommended Intermittent Cycle Rate	30 Cycles /min
	Inlet Fluid Connection	3/8" Universal (BSPP/NPSM) Male or Female
	Outlet Fluid Connection	3/8" Universal (BSPP/NPSM) Male or Female
	Maximum Dry/Wet Lift	6.6m (21.8 feet)
	Air Inlet	G1/4" (BSPP) Female
	Fluid Regulator Pilot	Ø4 Tube
	Air Volume / cycle @ 6.9Bar/100 psi	0.77L (0.027SCFM)
	Air Flow @ 10 cycles/min 6.9 bar/100 psi	7.7L/min (0.27SCFM/min)
	Air Flow @ 30 cycles/min 6.9 bar/100 psi	23.2L/min (0.82SCFM/min)
		Dirt 5 microns
	Air Ovality ICO 0F771 Class 7.7.2 #	Water -20°C @ 7bar (940ppm)
	Air Quality ISO 8573.1 Class 3.3.2 #	Oil 0.1mg/m3
		Non Lubricated
	Noise Level	68db LAeq
	Earth (Air Inlet Cover)	<1Ω
	Weight - Bare Pump	2.2 Kg (4.9 lbs)




SPRAY GUN KITS FOR USE WITH THE DX PUMP


Par No	Description
905145 to 905156	Prolite Pressure High Efficiency Gun Kit

DX PUMP OUTFITS

Par No	Description
DX70R3-CF2	Cart mounted pump outfit with filter and three air controls
DX70R3-TF2	Tripod mounted pump outfit with paint filter and three air controls
DX70R3-WF2	Wall mounted pump with paint filter and three air controls



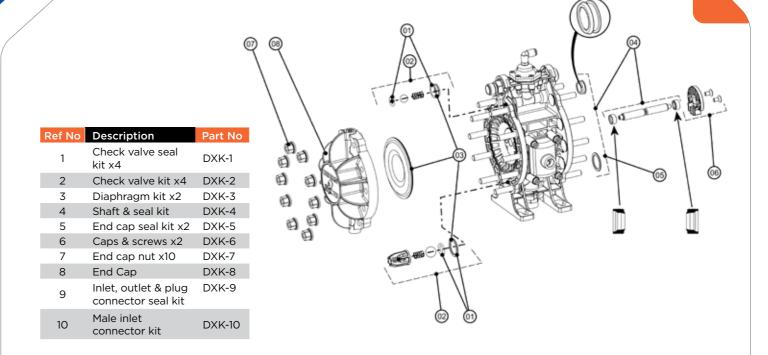

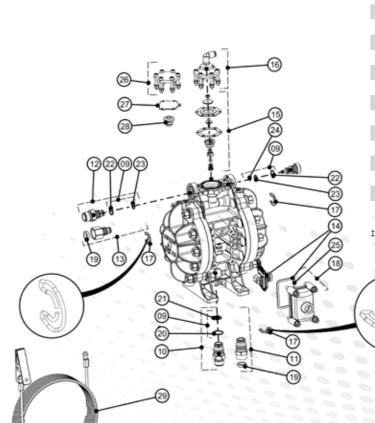

Ref No	Description	Part No
11	Female inlet connector kit	DXK-11
12	Male outlet connector kit	DXK-12
13	Female outlet connector kit	DXK-13
14	Air valve kit	DXK-14
15	Fluid regulator kit	DXK-15
16	Regulator cap & screws	DXK-16
17	Inlet (x2) & outlet (x2) clips	DXK-17
18	Cover, seal & screws	DXK-18
19	Female inlet / outlet thread seal x4	DXK-19
20	O-ring x5	DXK-20
21	O-ring x5	DXK-21
22	O-ring x5	DXK-22
23	O-ring x5	DXK-23
24	O-ring x5	DXK-24
25	Gasket x4	DXK-25
26	Blanking plate & screws ‡	DXK-26
27	Blanking gasket x 4 ‡	DXK-27
28	Insert ‡	DXK-28
29	Grounding cable 4m	0114-011798

‡ = parts for non-fluid regulator model

≡ MXL PUMPS

- Patented air valve technology. Enables pump to change over quickly to significantly reduce pulsation.
- Long lasting ceramic coated piston rods. Superior wear resistance lasting up to three times longer than hard chrome pistons.
- Designed to pump long with less downtime and extended packing life. Selfadjusting sprint loaded fixed packings last up to three times longer than the competition. Large sight glass for visual packing inspection.
- O Air Assisted Airless HVLP Spray Gun provides the latest atomisation technology.
- Stainless Steel system pump and gun.





- O Lightweight Air Assisted Airless Gun.
- High quality atomization for industry leading finish.
- Solid forged gun body for maximum durability and longer life.
- ${\color{red} \bullet}$ Quick-Clean $^{\text{TM}}$ gun coating for fast cleaning and maintenance
- Wide selection of flat, fine-finish and twist tips available.

Par No	Description
MXL432PU-C-F-ACG	Cart Mounted (Trophy AA4400 gun not included)
MXL432PU-T-F-ACG	Tripod Mounted (Trophy AA4400 gun not included)
4400-H10000	Trophy AA4400 with AA10 HVLP air cap, without flat tip

PUMP SPECIFICATIONS

Ratio	32:1
Max Inlet Pressure	8.0 bar (116 psi)
Flow Rate Nominal	1.4 l/min
Flow Rate Max	4.0 l/min
Volume/Cycle	24cm³
Max Operating Pressure	256 bar (3600 psi)
Cylinder Diameter	85 mm
Piston Stroke	75 mm
Air Consumption @ 20 cycles/min	147 l/min


GUN SPECIFICATIONS

Maximum fluid pressure	303 Bar (4,400 psi)
Maximum air inlet pressure	7 bar [105 psi]
Gun body material	Forged Aluminium
Fluid path material	Stainless Steel
Fluid seat Material	Tungsten Carbide
Fluid inlet connection	1/4" NPS (m)
Air inlet connection	1/4" BSP / NPS (m)

ACCESSORIES

Par No	Description
0110-009132	Filter insert for high pressure filter - 100 mesh
0110-009133	Filter insert for high pressure filter - 150 mesh
0110-009134	Filter insert for high pressure filter - 200 mesh

FOR A DETAILED BREAKDOWN OF THE MXL PUMPS PLEASE CONSULT YOUR SERVICE BULLETIN OR CONTACT THE DEVILBISS CUSTOMER SERVICE DEPARTMENT.

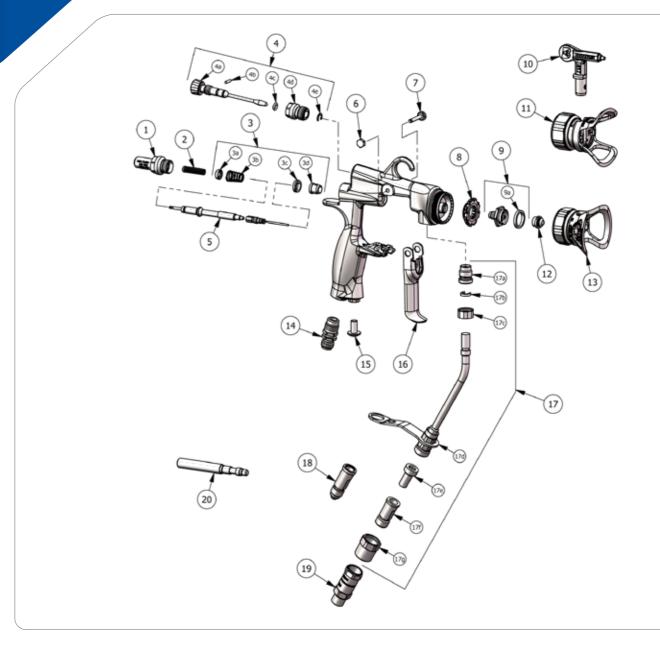

Ref No	Description	Part No
1	Air valve housing	54-6007
2	Needle return spring kit (multi-pack)	54-5935-K5
3	Spindle seal & spring kit	54-6131-K
3a	Rear seal	-
3b	Air valve spring	-
3c	Valve seal	-
3d	Front seal	-
4	Spreader valve assembly	54-5815
4a	Valve stem	-
4b	Pin	-
4c	O-ring (multi-pack)	SN-71X-K2
4d	Valve body	-
4e	Snap ring	-
5	Air valve & fluid needle assembly	54-5937
6	Trigger nut	54-6114
7	Trigger Screw	54-6115
8	Baffle plate (multi-pack)	SPA-71-K5
	Dame place (main pacity	SPA-71-K10
9	Fluid nozzle & gasket (flat tip)	54-5811-K
	Fluid nozzle & gasket (twist tip)	54-5833-K

9a	Gasket (multi-pack)	SPA-98-K5 SPA-98-K10
10	Reversible twist tip	-
11	HVLP twist tip air cap assembly	54-5924-K
12	Flat tip assembly	-
IZ	Fine finish flat tip assembly	-
13	AA10+ air cap assembly	54-6030-K
14	Air inlet (multi-pack)	SN-9-K3
15	Slotted round head screw, 1/4" - 20 x 1/2"	-
16	Trigger	54-6019
17	Fluid tube assembly	54-6015
17a	Fluid tube adapter	-
17b	Fluid tube retainer (multi-pack)	54-5896-K5
17c	Ferrule nut	54-5899
17d	Filter bracket	54-6017
17e	Fluid filter, 100 mesh	54-1835
17f	Disc filter body, 1/4" nps (m)	54-4726-K
17g	Disk filter retainer	-
18	JIC #5 fluid inlet fitting (sold separately	54-5897
19	Swivel adapter, 1/4" nps m x f (sold separately)	72-2360
20	Tool	SPN-7



글 PFT

- Single regulator and gauge to control tank and air pressure.
- Zinc plated lid assemblies for solvent based coatings.
- O Positive four point lid clamping for secure operation.
- O High density polyethylene, tank liners ensure efficient use.



SPECIFICATIONS

Tank Capacity	9.5 litre
Maximum working Pressure	5.5 bar (80 psi)
Safety Valve Set Pressure	5.5 bar (80 psi)
Air Inlet Size	1/4" BSP (M)
Fluid Outlet Size	3/8" BSP (M)
Tank Shell	SA-620 H.R Steel Zinc plate 2.7mm (8 gauge)
Tank Lid	SA-414 H.R Steel Zinc plate 4.2mm (3/16")
Fluid Tube	Steel, Galvanised Zinc Plate
Air Manifold	CRS Zinc Plated
Fluid Outlet	Steel, Galvanised Zinc Plate
Lid Gasket	Santoprene™

SPRAY GUN KITS FOR USE WITH KBII

Par No	Description
905145 to 905156	Filter insert for high pressure filter - 100 mesh
905100 to 905117	Filter insert for high pressure filter - 150 mesh

Kit contents are spray gun, (suction cup with filter if appropriate), Torx key, brush and multi-fit spanner

PRESSURE FEED TANK

Par No	Description	
83C-210-B	9.5 litre capacity zinc plated tank and lid assembly	
PT-78-K10	Kit of 10 polyethylene inner liners for 9.5 litre capacity tank	
VS-522	Paint filter (100 mesh) and housing - fits directly onto fluid outlet of tank - BSP	
H-7501HA-10	10 metre - 5/16"ID Air Hose Assembly	
H-7502HA-10	10 metre - 3/8"ID Air Hose Assembly	
H-7503HA-10	10 metre - 1/4"ID Fluid Hose Assembly	
H-7504HA-10	10 metre - 3/8"ID Fluid Hose Assembly	



PT-78-K10



Air Hose



22 Air in Fluid 23 out 6 19 16 -18 17 1A

Ref No	Description	Part No
1	Tank Assembly Kit (Includes Ref Nos. 1A, 13, 14, 15 & 16)	-
1A	Tank Shell	-
2	Lid Gasket, Santoprene	PT-33-1
3	Lid, Zinc Plated	-
4	Gauge	83-2727
5	Regulator	HAR-511
6	90° Swivel Adaptor 1/4' NPS (F) x 1/4' NPT (M)	SSP-30-ZN
7	Cross 1/4' NPT (F)	-
8	Safety Valve - 80 psi	TIA-5080-CE
9	Handle	PT-32
10	Hex Nut 3/8' - 16	-
11	Nipple 3/8' NPT (M) x 3/8' NPT (M) Nipple 3/8' NPT (M) x 3/8' BSP (M)	AD-11 2101007
12	Street Elbow 3/8' NPT (F) x 3/8' (M) S.S	SSP-1939

13	Thumb Screw	-
14	Yoke Assembly	-
15	Cotter Pin, 3/32 x 1"	-
16	Hinge Pin	-
17	Fluid Tube	PT-31
18	Tank Liner (Kit of 10)	PT-78-K10
18	Tank Liner (Kit of 60)	PT-78-K60
19	Hex Nipple 1/4' NPT (M)	-
20	Air Relief Valve	SS-2707
21	D.M Nipple	83-4233
22	(NPS) Nipple 1/4 ' NPT (M) x 1/4' NPS (M)	H-2008
22	(BSP) Nipple 1/4 ' NPT (M) x 1/4' BSP (M)	2101004
23	(NPS) Nipple 3/8' NPT (M) x 1/4' NPS (M)	83-4233
23	(BSP) Nipple 3/8' NPT (M) x 1/4' BSP (M)	2101005

^{** =} Air Cap / *** = Fluid Tip

SHIM-MASK by DEVILBISS ASTERISATION

= DVFR

DVFR-1 - FILTER REGULATOR

Par No	Des	cription
DV-9420601		er bowl removal tool
Ref No	Description	Part No
1	Upper Cover Assemb	oly DV-9450806
2	Filter (Air)	DV-9451705
3	Metal Filter Bowl	DV-9453301-MET
4	Ball Valve	SER-3414-MF
5	Pressure Gauge	GA-319
6	Isolation Valve	DV-8000035`

DVFR-2 FILTER - REGULATOR COALESCER

DV-942	0601 Filter	bowl removal tool
Ref No	Description	Part No
1	Upper Cover Assemb	ly DV-9450806
2	Filter (Air)	DV-9451705
3	Metal Filter Bowl	DV-9453301-MET
4	Ball Valve	SER-3414-MF
5	Pressure Gauge	GA-319
6	Fine Filter (Oil)	DV-9451711
7	Isolation Valve	DV-8000035


DVFR-3 FILTER REGULATOR

	Ref No	Description	Part No
	1	Upper Cover Assembly	DV-9350811
	2	Filter	9351706
	3	Metal Filter Bowl	DV-9353301
	4	Ball Valve	SER-3414-MF
	5	Pressure Gauge	GA-319


DVFR-8 FILTER REGULATOR COALESCER WITH ACTIVATED CARBON FILTER

Par No		iption
DV-942	0601 Filter	bowl removal tool
Ref No	Description	Part No
1	Upper Cover Assembly	DV-9450806
2	Filter (Air)	DV-9451705
3	Metal Filter Bowl	DV-9453301-MET
4	Ball Valve	SER-3414-MF
5	Pressure Gauge	GA-319
6	Fine Filter (Oil)	DV-9451711
7	Isolation Valve	DV-8000035
8	Activated Carbon Filte	r DV-9451711AC


DVFR-1

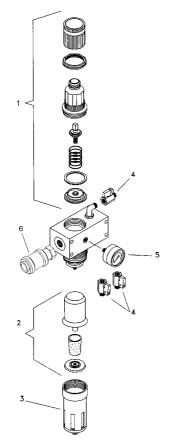


DVFR-3

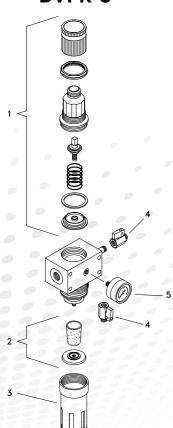

DVFR-2

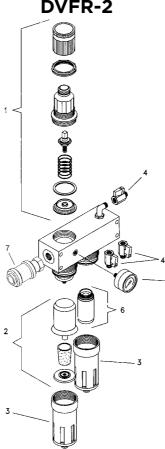

DVFR-4

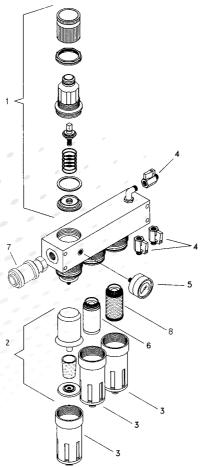

≡ SHIM-MASK

IDEAL FOR:

- Paint and lacquer runs.
- O Imperfections.
- O Minimising area when sanding paint-filled chips or scratches.

ADVANTAGES:

- Stainless steel 304 provides hardness for re-use.
- Chemically etched shapes eliminates burred edges.
- Choice of four stencil shapes.



SPECIFICATIONS


	H: 100 mn
Dimensions	D: 90 mm
	W: 1 mm
Weight	13g each

SHIM MASK

	Par No	Description
	SHIM-3	Pack of three stainless steel shim masks












by DEVILBISS AUTOMOTIVE REFINISHING


∃ GTI Pro Lite

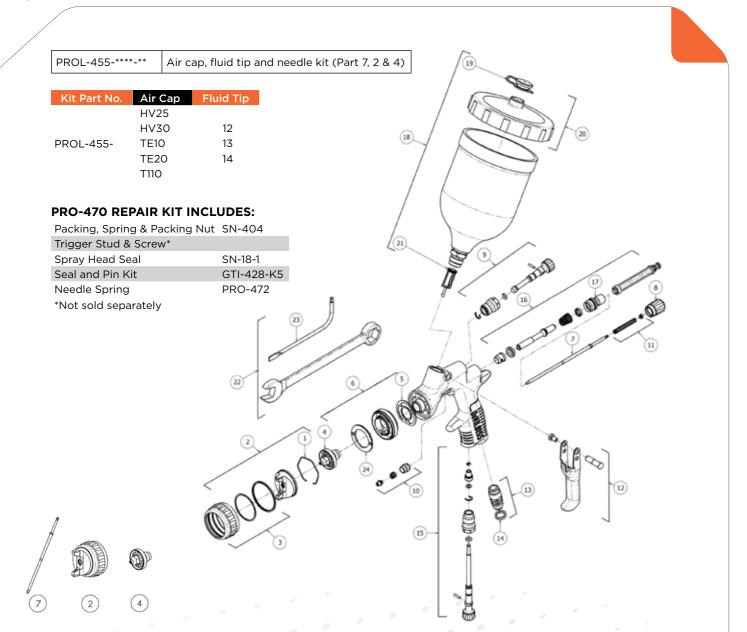

	Ref No	Description	Part No
	1	Air Cap Retaining Clip	905208
		TE10 High Efficiency Air Cap & Ring	905240
		TE20 High Efficiency Air Cap & Ring	905241
	2	HV30 HVLP Air Cap & Ring	905238
		HV25 HVLP Air Cap & Ring	PRO-102-HV25-K
		T110 High Efficiency Air Cap & Ring	905245
	3	Air Cap Retaining Ring & Seals	905280
	J	Cap, tip and needle kit	PROL-455-***-**
	4	Fluid Tip 11, 12, 13 or 14	905246/247/248/249
	5	Spray Head Seal (kit of 2)	905287
	6	Spray Head & Seal Kit	905303
	7	Fluid Needle	905266
	,	Spray gun repair kit	905281
	8	Fluid Adjusting Knob	905302
	9	Spreader Valve Assembly	905275
	10	Packing, Spring & Packing Nut Kit	905294
	11	Needle Spring Kit	905283

12	Trigger, Stud & Screw Kit	905306
13	Air Inlet	905305
14	Colour ID Ring Kit (4 Colours)	905289
15	Airflow Valve (Cheater)	905276
16	Air Valve Kit	905282
17	Body Housing	905301
18	Gravity Cup Kit	905204
19	Drip Check Lid (kit of 5)	905202
20	Gravity Cup Lid	905203
21	Filter	905207
22	Torx Key & Spanner	905296
23	Torx Key	905307
24	Baffle Plate	905297
	Boxed digital press gauge for Prolite gravity only	DGIPRO-504-BAR-K
	Swivel QD Stem (pack of 3)	MPV-60-K3
	Disposable whirlwind air filter	HAF-507
	Cleaning brushes kit of 3	4900-5-1-K3



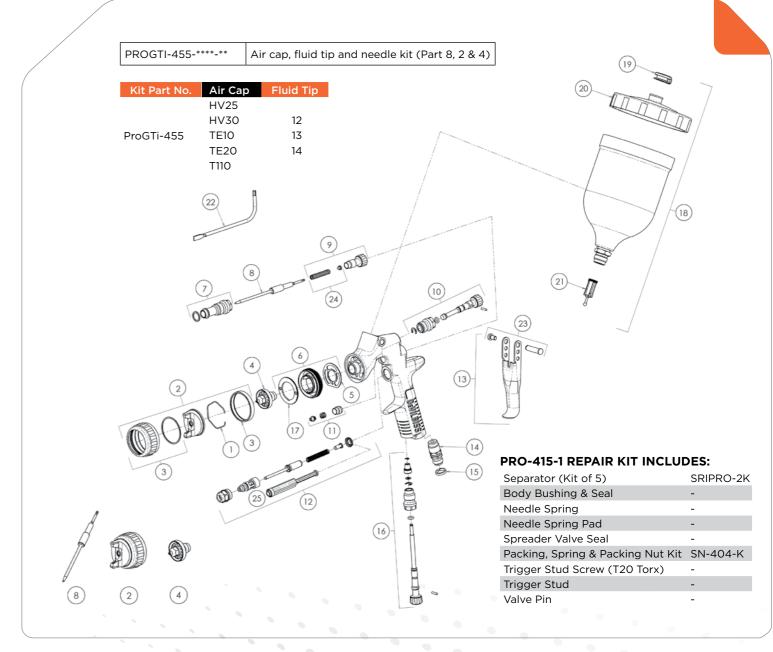


Ref No	Description	Part No
1	Air Cap Retaining Clip	905208
	TE10 High Efficiency Air Cap & Ring	905240
	TE20 High Efficiency Air Cap & Ring	905241
2	HV30 HVLP Air Cap & Ring	905238
	HV25 HVLP Air Cap & Ring	PRO-102-HV25-K
	T110 High Efficiency Air Cap & Ring	905245
3	Air Cap Retaining Ring & Seals	905280
4	Fluid Tips available (1.1 to 2.0)	905246
	Fluid Tips available (1.1 to 2.0)	to 905253
5	Spray Head Seal (kit of 2)	905287
6	Spray Head & Seal Kit	905303
7	Body Bushing & Seal	905300
8	Fluid Needle	PRO-300-K
9	Fluid Adjusting Knob, Spring & Pad Kit	905285
10	Spreader Valve Assembly	905275
11	Packing, Spring & Packing Nut Kit	905294

12	Air Valve Replacement Kit	905293
13	Trigger, Stud & Screw Kit	905288
14	Air Inlet	905305
15	Colour ID Ring Kit (4 Colours)	905289
16	Airflow Valve	905276
17	Baffle plate	905297
18	Gravity Cup Kit	905204
19	Drip Check Lid (kit of 5)	905202
20	Gravity Cup Lid	905203
21	Filter	905207
22	Torx Key	905307
23	Trigger Stud & Torx Screw (kit of 5)	905295
24	Needle spring and pad kit	905291
25	Air valve seal & service tool	905290

 $\mathbf{60}$

SRIP O LITE by DEVILESS ASTORDING REPRISAND

■ PRI Pro Lite

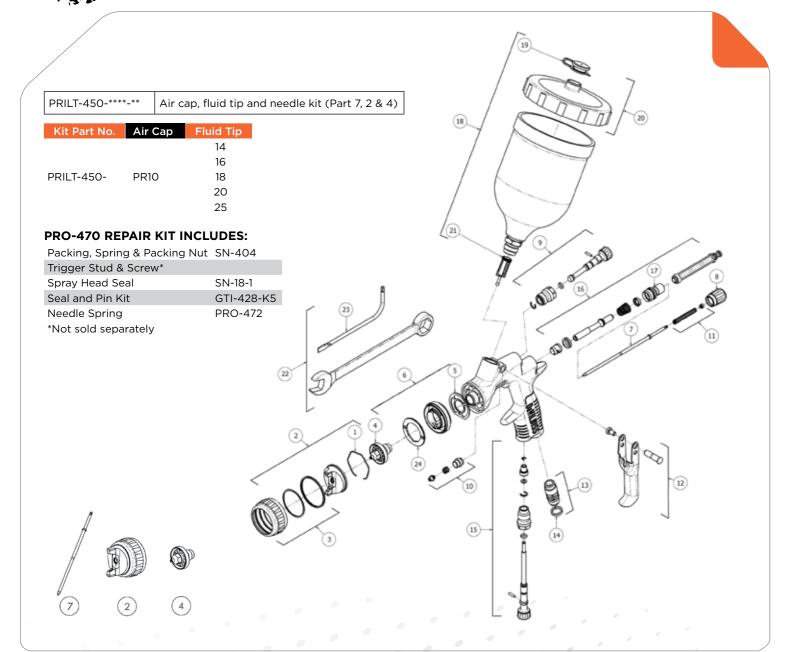

Ref No	Description	Part No
1	Air Cap Retaining Clip	905208
2	High Efficiency Air Cap	PRIPRO-102-PR10-K
3	Air Cap Retaining Ring & Seals	905280
4	Fluid Tip 14,16, 18, 20, 25	PRIPRO-220-**-K
4	UV Fluid Tip 1 & 2	905211
5	Spray Head Seal (kit of 2)	905287
6	Spray Head & Seal Kit	905303
7	Fluid Needle	PRIPRO-320-K
/	UV Fluid Needle	PRIPRO-319-K
8	Fluid Adjusting Knob, Spring & Pad Kit	905302
9	Spreader Valve Assembly	905275
10	Packing, Spring & Packing Nut Kit	905294
11	Needle Spring Kit	905283
12	Trigger, Stud & Screw Kit	905306

1	13	Air Inlet	905305
	14	Colour ID Ring Kit (4 Colours)	905289
	15	Airflow Valve (Cheater)	905276
	16	Air Valve Kit	905282
	17	Body Housing	905301
	18	Gravity Cup Kit	905204
	18	Black UV Gravity Cup Kit	905205
	19	Drip Check Lid (kit of 5)	905202
	20	Gravity Cup Lid	905203
	21	Filter	905207
	22	Torx Key & Spanner	905296
	23	Torx Key & Spanner	905307

≡ SRI Pro Lite

	1	nd needle kit (Part 4, 1 & 2)
Kit Part No. Air C	ap Fluid Tip	(15) (16)
MC1	06	
SRIPROL-450-	08	
TE5	10	
	12	
		(18)
PRO-415-1 REPAIR H	(IT INCLUDES:	
Separator (Kit of 5)	SRIPRO-2K	
Body Bushing & Seal	-	
Needle Spring	-	
Needle Spring Pad	-	W (2)
Spreader Valve Seal	-	(10)
Packing, Spring & Packing Nut Kit	SN-404-K	
Trigger Stud Screw (T20 Torx)	-	
Trigger Stud	-	
Valve Pin	-	
A		
Å		
	M m	
		(2)
	-	
(4) (1)	(2)	


Ref No	Description	Part No
	HVLP Air Cap & Ring	905313
1	High Efficiency Air Cap & Ring	905316
ı	Round Spray Air Cap & Ring	905315
	High Efficiency Micro Air Cap & Ring	905314
2	Fluid Tips available (0.8 to 1.40)	905317 to 905320
	Fluid Tip (Micro only)	905321
3	Separator	905322
4	Fluid Needle for No. 08 & No. 10 Fluid Tips	905323
	Fluid Needle for No. 12 & No. 14 Fluid Tips	905324
	Fluid Needle (Micro Only)	905325
5	Fluid Adjusting Knob	905304
6	Spreader Valve Assembly	905326
7	Body Bushing & Seal	905300
8	Packing, Spring & Packing Nut Kit	905294
9	Air Valve Assembly	905293

10	Stud and Screw kit	905295
11	Trigger, Stud & Screw Kit	905298
12	Air Inlet	905292
13	Colour ID Ring Kit (4 Colours)	905289
14	Airflow Valve	905278
15	Gravity Cup Kit	905311
16	Filter	905309
17	Drip Check Lid (kit of 5)	905202
18	Funnel kit of 12	905312
19	Spanner kit of 2	905310
20	Torx Key	905307
21	Needle spring and pad kit	905299
22	Air valve seal & service tool	905290
23	Gravity Cup Lid	905308




CFGP by DEVILESS AUTOMOTIVE REPINISATION

Ξ GPI

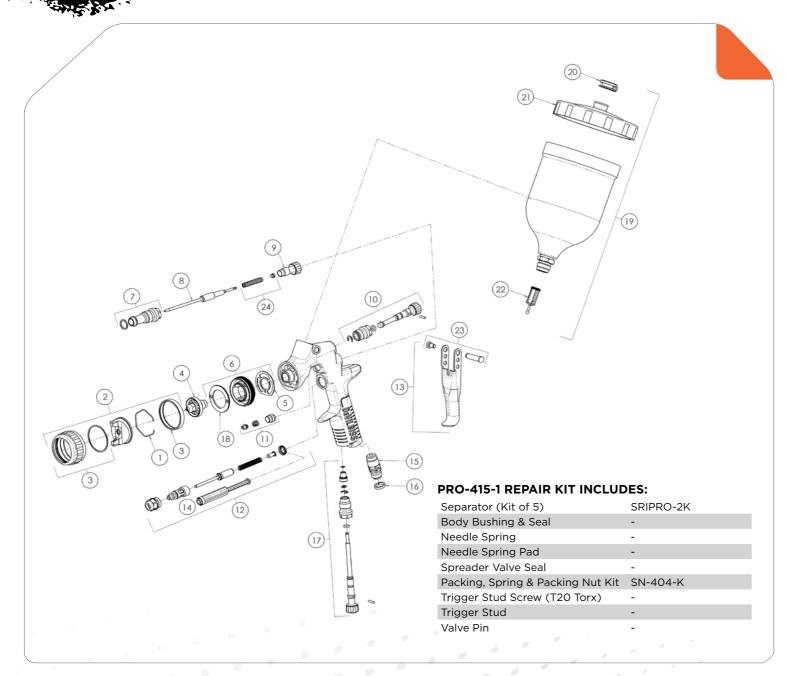

Ref No	Description	Part No
1	Air Cap Retaining Clip	905208
2	Air Cap	PRO-102-GP1-K
3	Air Cap Retaining Ring & Seals	PRO-405-K
4	Fluid Tip - 14, 16, 18	PROC-215-**-K
5	Spray Head Seal (kit of 2)	905287
6	Spray Head & Seal Kit	905286
7	Body Bushing & Seal	905300
	Fluid Needle for No. 14 Fluid Tips	905267
8	Fluid Needle for No. 16 & No. 18 Fluid Tips	905268
9	Fluid Adjusting Knob	PRO-3-K
10	Spreader Valve Assembly	905275
11	Packing, Spring & Packing Nut Kit	905294
12	Air Valve Replacement Kit	905293

13	Trigger, Stud & Screw Kit	905288
14	Air Valve Seal & Service Tool	905290
15	Air Inlet	905292
16	Colour ID Ring Kit (4 Colours)	905289
17	Airflow Valve	905276
18	Baffle plate	905297
19	Gravity Cup Kit	905204
20	Drip Check Lid (kit of 5)	905202
21	Gravity Cup Lid	905203
22	Filter	905207
23	Trigger Stud & Torx Screw (kit of 5)	905295
24	Needle spring and pad kit	905291
25	Air valve seal & service tool	905290

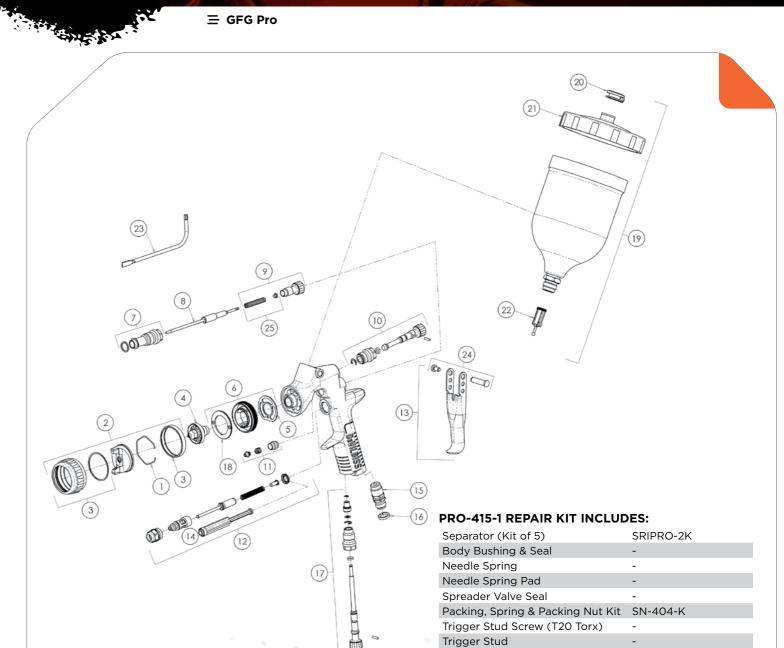

Valve Pin

Ref No	Description	Part No
1	Air Cap Retaining Clip	905208
2	C1 Aircap & Ring	PROC-120-C1-K
2	C2 Aircap & Ring	PROC-120-C2-K
3	Air Cap Retaining Ring & Seals	PRO-405-K
4	Fluid Tip (14, 16 & 18)	PROC-220-**-K
5	Spray Head Seal (kit of 2)	905287
6	Spray Head & Seal Kit	905286
7	Body Bushing & Seal	905300
8	Fluid Needle	GFGPRO-320-K
9	Fluid Adjusting Knob, Spring & Pad Kit	PRO-3-K
10	Spreader Valve Assembly	PRO-402-K
11	Packing, Spring & Packing Nut Kit	905294
12	Air Valve Replacement Kit	905293

13	Trigger, Stud & Screw Kit	905288
14	Air Valve Seal & Service Tool	905290
15	Air Inlet	905292
16	Colour ID Ring Kit (4 Colours)	905289
17	Airflow Valve	PRO-411-K
18	Baffle plate	905297
19	Gravity Cup Kit	905204
20	Drip Check Lid (kit of 5)	905202
21	Gravity Cup Lid	905203
22	Filter	905207
23	Torx Key	905307
24	Trigger Stud & Torx Screw (kit of 5)	905295
25	Needle spring and pad kit	905291

GIIP O by DEVILBISS AUTOMOTIVE REFINISHING

≡ FLG-5

Description - Gravity Gun	Part No
Retaining ring	905345
Air cap	905332
Fluid tip 1.4mm Fluid tip 1.8mm	905341 905344
Fluid tip 2.0mm (available separately)	905342
Gasket	905352
Baffle	*
Packing	K-5370
U-cup seal	*
Air-valve seat	*
Air-valve stem	*
Air-valve spring	*
Fluid needle 1.4mm	905348 905349
Fluid needle 2.0mm (available separately)	905350
Filter	905207
Lid assembly	905203
Drip free vent lid kit of 5	905202
Cup assembly	905204
Assembly tool	*
	Retaining ring Air cap Fluid tip 1.4mm Fluid tip 1.8mm Fluid tip 2.0mm (available separately) Gasket Baffle Packing U-cup seal Air-valve seat Air-valve stem Air-valve spring Fluid needle 1.4mm Fluid needle 1.8mm Fluid needle 2.0mm (available separately) Filter Lid assembly Drip free vent lid kit of 5 Cup assembly

Seal, baffle and gasket

replacement kit, items 4, 5, 6, 7, 8, 905337

9, 10, and 16

• Baffle replacement kit, items 4 and 5 905335


The

Ref No	Description - Suction Gun	Part No
1	Retaining ring	SGK-23-K
2	Air cap	FLG-1-5-K
3	Fluid tip 1.8mm	SGK-14-18-K
4	Gasket	SGK-43-K10
5	Baffle	*
6	Packing	K-5370
7	U-cup seal	*
8	Air-valve seat	*
9	Air-valve stem	*
10	Air-valve spring	*
11	Fluid needle 1.8mm	SGK-430-18-K
12	Assembly tool	*


Seal, baffle and gasket replacement kit, items 4, 5, 6, 7, 8, 9, 10, and 16

Baffle replacement kit, 905335

items 4 and 5

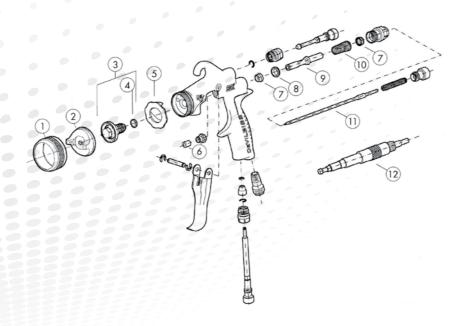



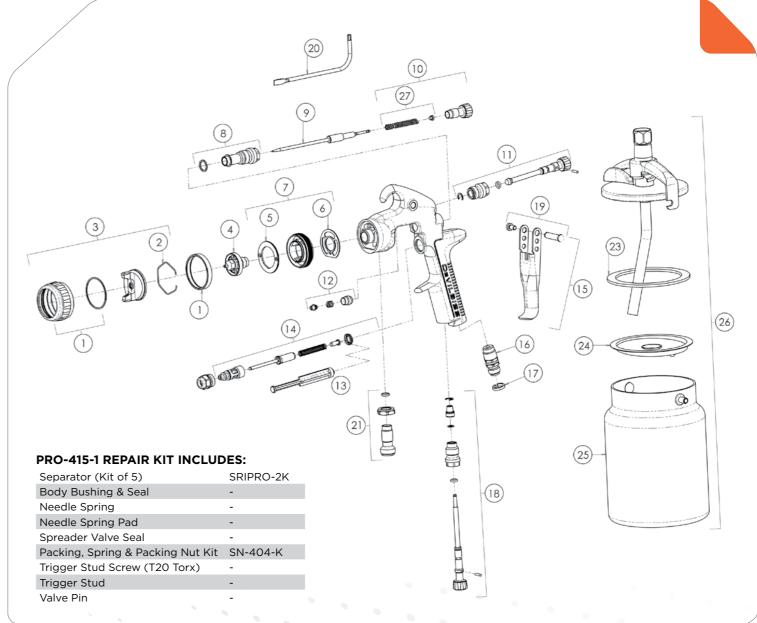


Ref No	Description	Part No
1	Air Cap Retaining Clip	905208
2	Air Cap Retaining Clip	905208
3	Aircap & Ring	-
4	Fluid Tip	-
5	Baffle Plate	905297
6	Spray Head Seal (kit of 2)	905287
7	Spray Head & Seal Kit	905303
8	Body Bushing & Seal	905300
9	Fluid Needle	-
10	Fluid Adjusting Knob, Spring & Pad Kit	905285
11	Spreader Valve Assembly	905278
12	Packing, Spring & Packing Nut Kit	905294
13	Air Valve Seal	905290
14	Air Valve Assembly	905293

15	Trigger, Stud & Screw Kit	905288
16	Air Inlet	905305
17	Colour ID Ring Kit (4 Colours)	905289
18	Airflow Valve	905276
19	Stud and Screw kit	905295
20	Torx Key	905307
21	Fluid Inlet Connector Kit	PRO-12-K
22	Cup Lid Assembly	905357
23	Lid Gaskets - kit of 3	905354
24	Drip Free Diaphragms - Kit of 5	905355
25	Cup Only	905358
26	Complete Cup Assembly	905353
27	Needle spring and pad kit	905291

JGAP o by DEVILBISS ASTONETIVE REFINISHING

≡ JGA Pro

≡ GTI Pro Lite

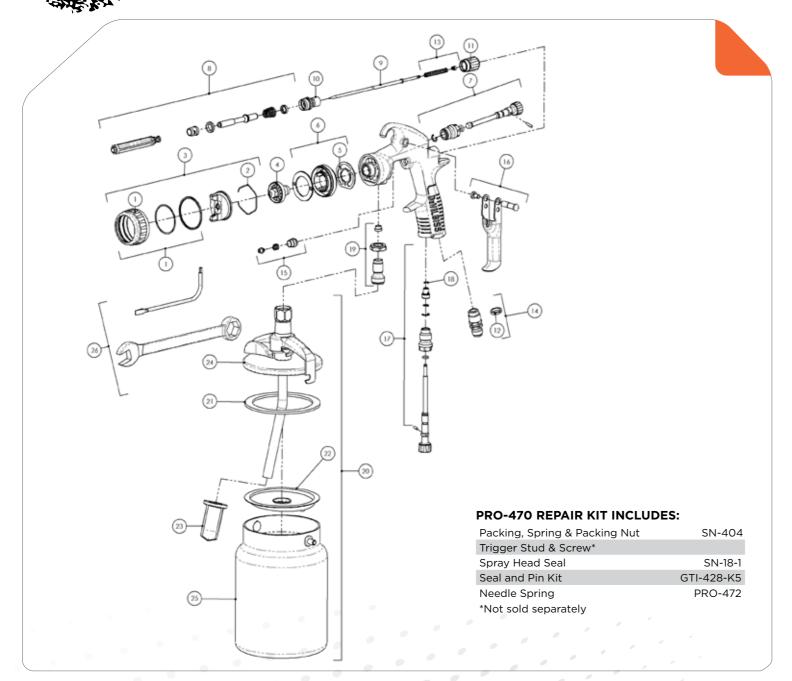


Ref	No Description	Part No
1	Air Cap Retaining Clip	905208
2	Air Cap Retaining Clip	905208
3	High Efficiency Aircap & Ring	-
4	Fluid Tip Kit	-
5	Spray Head Seal	905287
6	Spray Head Kit	905303
7	Spreader Valve Assembly	905278
8	Air Valve Kit	905282
9	Fluid Needle	-
10	Housing	905301
11	Fluid Adjusting Knob	905302
12	Colour ID Ring Kit (4 Colours)	905289
13	Needle spring kit	905283

14	Air Inlet Kit	905305
15	Packing, spring and packing nut kit	905294
16	Trigger, stud & Screw Kit	905306
17	Airflow valve	905276
18	Circlip - kit of 5	905200
19	Fluid inlet kit	905201

SUCTION CUP MODELS ONLY

Ref No	Description	Part No
20	Suction cup kit	905353
21	Cup lid gasket - kit of 3	905354
22	Drip check Diaphragm (kit of 5)	905355
23	Filter - kit of 10	905356
24	Lid assembly	905357
25	Cup	905358

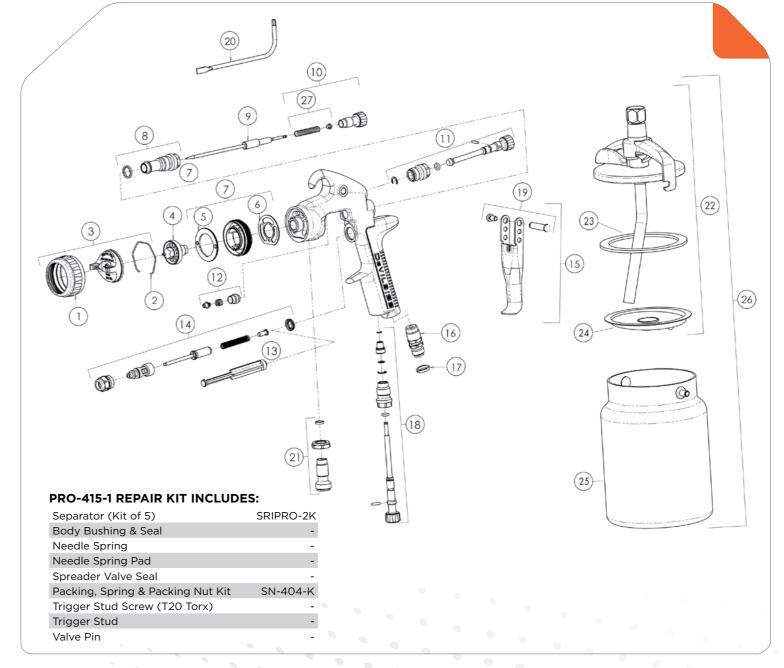

Ref No	Description	Part No
1	Air Cap Retaining Clip	PRO-405-K
2	Air Cap Retaining Clip	905208
3	Aircap & Ring	-
4	Fluid Tip	-
5	Baffle Plate	905297
6	Spray Head Seal (kit of 2)	905287
7	Spray Head & Seal Kit	905286
8	Body Bushing & Seal	905300
9	Fluid Needle	-
10	Fluid Adjusting Knob, Spring & Pad Kit	PRO-3-K
11	Spreader Valve Assembly	PRO-404-K
12	Packing, Spring & Packing Nut Kit	905294
13	Air Valve Seal	905290
14	Air Valve Assembly	905293

15	Trigger, Stud & Screw Kit	905288
16	Air Inlet	905292
17	Colour ID Ring Kit (4 Colours)	905289
18	Airflow Valve	PRO-411-K
19	Stud and Screw kit	905295
20	Torx Key	905307
21	Fluid Inlet Connector Kit	PRO-12-K
22	Cup Lid Assembly	905357
23	Lid Gaskets - kit of 3	905354
24	Drip Free Diaphragms - Kit of 5	905355
25	Cup Only	905358
26	Complete Cup Assembly	905353
27	Needle spring and pad kit	905291




PRIP O by DEVILEISS AUTOMOTIVE REPINISHING

= PRI Pro

∃ GTI Pro



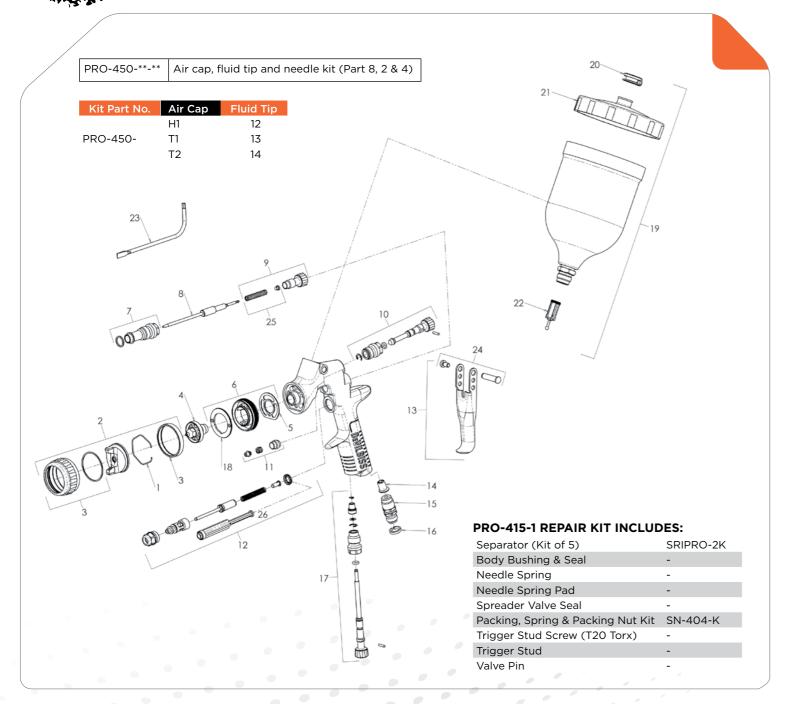

Ref No	Description	Part No
1	Air Cap Retaining Clip	JGA-156-K5
2	T1 Trans-tech® Aircap & Ring	PRO-100-T1-K
	T2 Trans-tech® Aircap & Ring	PRO-100-T2-K
	H1 HVLP Aircap & Ring	PRO-100-H1-K
3	Air Cap Retaining Ring & Seals	PRO-405-K
4	Fluid Tip - 12, 13, 14	PRO-200-**-K
5	Spray Head Seal (kit of 2)	SN-18-1-K2
6	Spray Head & Seal Kit	SN-17-1-K
7	Body Bushing & Seal	SN-6-K
8	Fluid Needle	PRO-300-K
9	Fluid Adjusting Knob, Spring & Pad Kit	PRO-3-K
10	Spreader Valve Assembly	PRO-402-K
11	Packing, Spring & Packing Nut Kit	SN-404-K
12	Air Valve Replacement Kit	SN-402-K
13	Trigger, Stud & Screw Kit	SN-21-K

14	Insert - Pack of 5 (with DGi Pod Only)	SN-57-K5
15	Air Inlet	SN-40-K
16	Colour ID Ring Kit (4 Colours)	SN-26-K4
17	Airflow Valve	PRO-411-K
18	Baffle plate	SN-41-K
19	Gravity Cup Kit	GFC-501
20	Drip Check Lid (kit of 5)	GFC-2-K5
21	Gravity Cup Lid	GFC-402
22	Filter	KGP-5-K5
23	Torx Key	SPN-8-K2
24	Trigger Stud & Torx Screw (kit of 5)	SN-405-K5
25	Needle spring and pad kit	SN-4-K3
26	Air valve seal & service tool	SN-34-K5

K	(it Part No. Air	Cap Fluid Tip 14 16	nd needle kit (Pi	art 8, 2 & 4)		21		7
	,	14 16	ı				The state of the s	,
PR	RIPRO-450-			r				
		P1 18 20						7/
	23	25			7			19
	7	8	25)	(10)		22 1		
	000	6		10	(24) (6) (9) (9) (9) (9) (9) (9) (9) (9) (9) (9	0/		
	2			13				
		3			15)			
	3) (M)	14 0 12			16)			
			17					

Ref No	Description	Part No
1	Air Cap Retaining Clip	JGA-156-K5
2	Trans-tech® Aircap	PRIPRO-100-P1-K
3	Air Cap Retaining Ring & Seals	PRO-405-K
4	Fluid Tip - 14, 16, 18, 20, 25	PRIPRO-210-**-K
5	Spray Head Seal (kit of 2)	SN-18-1-K2
6	Spray Head & Seal Kit	SN-17-1-K
7	Body Bushing & Seal	SN-6-K
8	Fluid Needle	PRIPRO-310-K
9	Fluid Adjusting Knob, Spring & Pad Kit	PRO-3-K
10	Spreader Valve Assembly	PRO-402-K
11	Packing, Spring & Packing Nut Kit	SN-404-K
12	Air Valve Replacement Kit	SN-402-K
13	Trigger, Stud & Screw Kit	SN-21-K

14	Air valve seal & service tool	SN-34-K5
15	Air Inlet	SN-40-K
16	Colour ID Ring Kit (4 Colours)	SN-26-K4
17	Airflow Valve	PRO-411-K
18	Baffle plate	SN-41-K
19	Gravity Cup Kit	GFC-501
20	Drip Check Lid (kit of 5)	GFC-2-K5
21	Gravity Cup Lid	GFC-402
22	Filter	KGP-5-K5
23	Torx Key	SPN-8-K2
24	Trigger Stud & Torx Screw (kit of 5)	SN-405-K5
25	Needle spring and pad kit	SN-4-K3

(PRE-2016 MODEL) by DEVILBISS

≡ SRI Pro

SRIPRO-450-**-** Air cap, fluid tip and needle kit (Part 1, 2 & 4) Kit Part No. Air Cap Fluid Tip 08 SRIPROL-450- TS1 08 HS1 10 12 PRO-415-1 REPAIR KIT INCLUDES: Seal & Pin Kit (5 Pack) GTI-428 K5 Fluid Needle Spring (Sub Assy) SN-409

Ref No	Description	Part No
	HVLP Air Cap & Ring	SRIPRO-100-HS1-K
1	Trans-Tech Air Cap & Ring	SRIPRO-100-TS1-K
	Round Spray Air Cap & Ring	SRIPRO-100-RS1-K
2	Fluid Tip (** = 08, 10, 12 or 14)	SRIPRO-200-**-K
3	Separator	SRIPRO-2-K5
4	Fluid Needle for No. 08 & No. 10 Fluid Tips	SRIPRO-300-08- 10-K
4	Fluid Needle for No. 12 & No. 14 Fluid Tips	SRIPRO-300-12-14-K
5	Fluid Adjusting Knob, Spring & Pad Kit	PRO-3-K
6	Spreader Valve Assembly	SRIPRO-401-K
7	Body Bushing & Seal	SN-6-K
8	Packing, Spring & Packing Nut Kit	SN-404-K
9	Air Valve Assembly	SN-402-K

SN-404

SN-8

SN-13

SN-18-1

SN-22

SRIPRO-2

Needle Packing

Trigger Stud


Screw

Separator

Body Bushing Gasket

Sprayhead Gasket

10	Stud and Screw kit	SN-405-K5
11	Trigger, Stud & Screw Kit	SN-42-K
12	Air Inlet	SN-40-K
13	Colour ID Ring Kit (4 Colours)	SN-26-K4
14	Airflow Valve	PRO-404-K
15	Gravity Cup Kit	SRI-510
16	Filter	SRI-42-K3
17	Drip Check Lid (kit of 5)	GFC-2-K5
18	Funnel kit of 12	SRI-51-K12
19	Spanner kit of 2	SRI-50-K2
20	Torx Key	SPN-8-K2
21	Needle spring and pad kit	SN-4-K3
22	Air valve seal & service tool	SN-34-K5
23	Gravity Cup Lid	SRI-414-K2

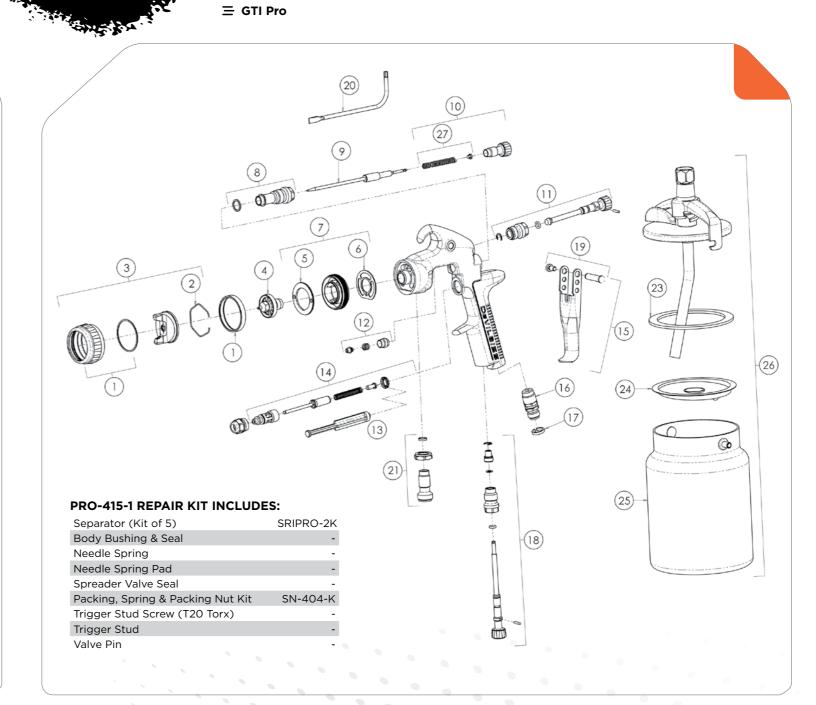


Ref No	Description	Part No
1	Air Cap Retaining Ring	PRO-405-K
2	Air Cap Retaining Clip	JGA-156-K5
3	Aircap & Ring (H1, T1, T2, T4)	PRO-100-**-K
4	Fluid Tip (16, 18, 20	PRO-200-**-K
5	Baffle Plate	SN-41-K
6	Spray Head Seal (kit of 2)	SN-18-1-K2
7	Spray Head & Seal Kit	SN-17-1-K
8	Body Bushing & Seal	SN-6-K
9	Fluid Needle	PRO-315-K
10	Fluid Adjusting Knob, Spring & Pad Kit	PRO-3-K
11	Spreader Valve Assembly	PRO-404-K
12	Packing, Spring & Packing Nut Kit	SN-404-K
13	Air Valve Seal	SN-34-K5
14	Air Valve Assembly	SN-402-K
15	Trigger, Stud & Screw Kit	SN-21-K


16	Air Inlet	SN-40-K
17	Colour ID Ring Kit (4 Colours)	SN-26-K4
18	Airflow Valve	PRO-411-K
19	Stud and Screw kit	SN-405-K5
20	Torx Key	SPN-8-K2
21	Fluid Inlet Connector Kit	PRO-12-K
22	Cup Lid Assembly	KR-4001-B
23	Lid Gaskets - kit of 3	KR-11-K3
24	Drip Free Diaphragms - Kit of 5	KR-115-K5
25	Cup Only	KR-466-K
26	Complete Cup Assembly	KR-566-1-B
27	Needle spring and pad kit	SN-4-K3

by DEVILBISS

= DAGR



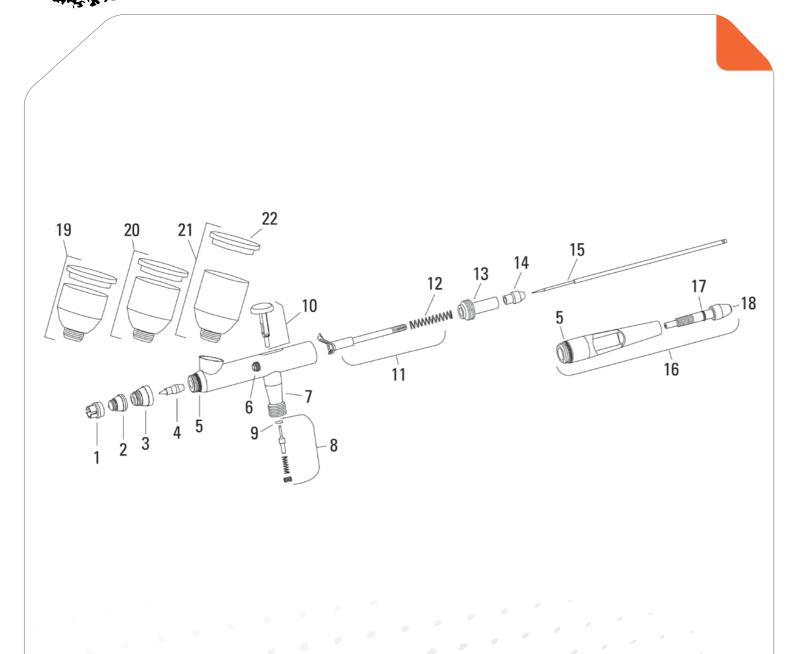

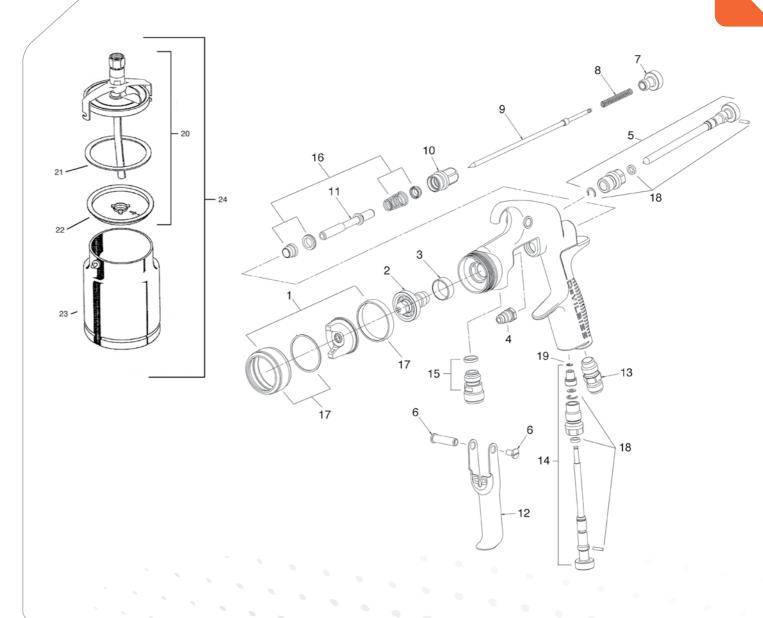

Ref No	Description	Part No
1	Crown cap	DGR-101
2	Air cap (for .35mm Tip)	DGR-103-35
3	Head cap	DGR-104
4	Tip (.35mm)	DGR-105-35
* 5	O-ring (head cap & handle)	-
6	Packing and nut assembly (PTFE)	DGR-106K
7	Air valve casing	DGR-107
8	Air valve kit	DGR-108K
* 9	Air valve washer	-
10	Trigger assembly	DGR-323
11	Needle guide, rocker and spring	DGR-110K
* 12	Needle spring	-
13	Spring guide	DGR-111

14	Needle locknut	DGR-112
15	Needle (for .35mm tip)	DGR-113-35
16	Cutaway handle w/pre-set	DGR-114
* 17	O-ring (pre-set needle knob)	-
18	Pre-set needle knob	DGR-116
19	1/4 oz. (7 cc) cup and lid	DGR-117
20	1/3 oz. (9 cc) cup and lid (standard)	DGR-118
21	1/2 oz. (14 cc) cup and lid	DGR-119
22	Cup lid	DGR-120
REPAI	R KIT	

PAIR KIT			
DAGR repair kit - includes item	DGR-121K		
numbers 5 9 12 & 17	DGK-IZIK		


Ref No	Description	Part No
1	Air Cap Retaining Ring	SP-100-510-K
2	Tip (** = 1.0, 1.4, 1.6, 1.8, 2.0, 2.2mm)	SP-200S-**-K
3	Separator	SP-623-K5
4	Packing	GTI-445-K2
5	Spreader Valve	SP-401-K
6	Stud and Screw	GTI-408-K5
7	Needle Adjusting Screw	SP-614-K
8	Spring	SP-622-K5
9	Needle (** = 1.0, 1.4, 1.6, 1.8, 2.0, 2.2mm)	SP-300S-**-K
10	Airvalve housing + seal	SP-612-K
11	Spindle	-
12	Trigger	SP-617-CR-K

13	Connector	SP-611-K
14	Airflow Valve	SP-402-K
15	Fluid Inlet Connector and seal	SP-610-K
16	Air Valve Service Kit	SPK-101-K
17	Retaining Ring and Seals	SPK-102-K
18	Spreader/ Cheater Service Kit	GTI-428-K5
19	Circlip	25746-007-K5
20	Cup Lid Assembly	KR-4001-B
21	Lid Gasket - Kit of 3	KR-11-K3
22	Drip Free Diaphragm - Kit of 5	KR-115-K5
23	Cup	KR-466-K
24	Complete Cup	KR-566-1-B


GIIVV-GIIG-PRI by DEVILBISS

GIP-GIS by DEVILESS.

≡ GTIW-GTIG-PRI

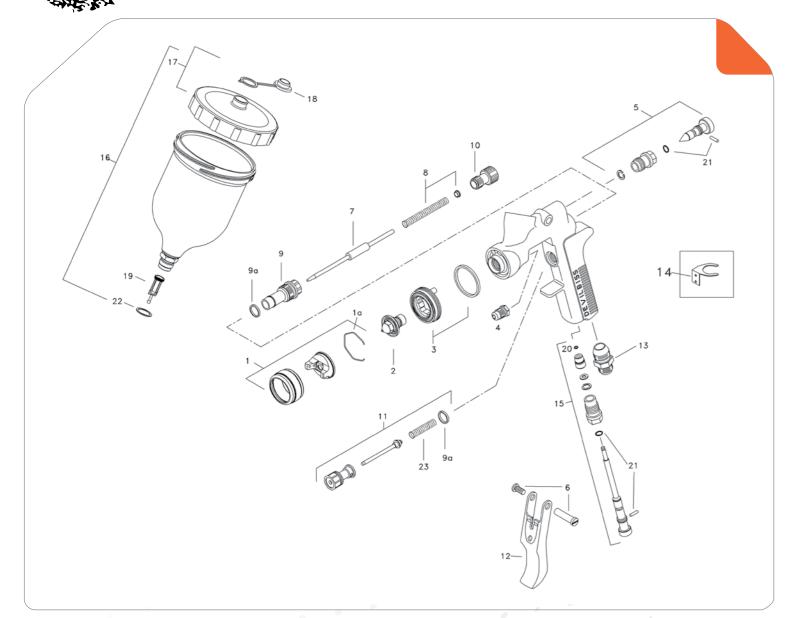



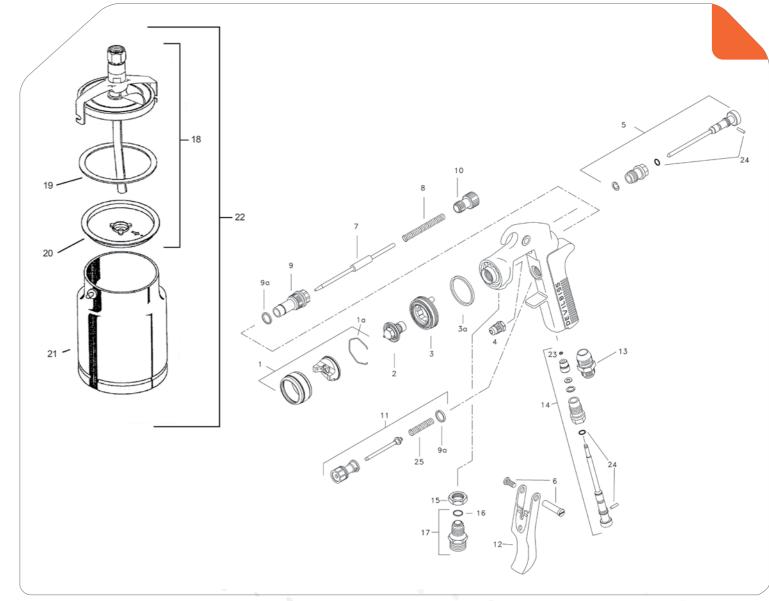

Ref No	Description	Part No
	GTi-W Air Cap / Retaining ring	GTi-407-115
1	GTi-G Air Cap / Retaining ring	GTi-407-110
	PRi Air Cap / Retaining ring	PRi-407-310
1a	Spring Clip	JGA-156-K5
	GTi-W Tip (1.3, 1.4 & 1.5mm)	GTi-213-**-K
2	GTi-G Tip (1.2, 1.3, 1.4 & 1.5mm)	GTi-213-**-K
	PRi Tip (1.6, 1.8, 2.0, 2.2 & 2.5mm)	PRi-2-**-K
7	Baffle & Seal	GTi-425-K
3	Baffle Seal - Kit of 5	GTi-33-K5
4	Packing	GTi-445-K2
5	Spreader Valve	GTi-404-K
6	Stud and Screw	GTi-408-K5
7	GTi Needle	GTi-413-K
,	PRi Needle	PRi-3-K
8	Spring and Pad	GTi-409-K5
9	Bushing	GTi-402-K
9a	Seal kit of 5	JGS-72-K5

	10	Needle Adjusting Screw	GTi-414-K
	11	Valve Assembly	JGK-449-K
	12	Trigger	GTI-108
	13	Connector	JGA-158
	14	Gun Hook	GFG-6
	15	Airflow Valve	GTi-415-K
	16	12 Ltr Gravity Cup Kit	GFC-501
1	17	Cup Lid	GFC-402
	18	Drip Check Lid kit of 5	GFC-2-K5
	19	Filter	KGP-5-K5
	20	Circlip	25746-007-K5
	21	Seal & Pin Kit (+SST8434-K5)	GTi-428-K5
	22	Washer	GFC-17-K5
		Spring	JGV-262-K5
	23	Service Kit for GTI gravity and suction - 12, 13, 14, 15, 16, 18, 20, 22 tip	GTI-416-**
		Service Kit for PRi - 16, 18, 20, 22, 25 tip	PRi-416-**


Ref No	Description	Part No
1	GTI-P air cap/retaining ring	GTI-407-123
ı	GTI-S air cap/retaining ring	GTI-407-110
1a	Spring Clip	JGA-156-K5
2	GTI-P Tip	GTi-213-**-K
	GTI-S Tip	GTI-214-**-K
3	Baffle & Seal	GTI-425-K
3	Baffle seal—Kit of 5	GTI-33-K5
4	Packing	GTi-445-K2
5	Spreader Valve	GTI-405-K
6	Stud and Screw	GTI-408-K5
7	GTI-P needle	GTi-449-**-K
/	GTi-S needle (for GTI-214 Tip)	GTI-420-K
8	Spring and Pad	GTI-409-K5
9	Bushing	GTI-402-K
9a	Seal kit of 5	JGS-72-K5
10	Needle Adjusting Screw	GTI-414-K


11	Valve Assembly	JGK-449-K
12	Trigger	GTI-108
13	Connector	JGA-158
14	Airflow Valve	GTI-415-K
15	Lock Nut	JGA-51-K5
16	Seal	23165-001
17	Fluid Inlet Connector and seal	JGA-159-K
18	Cup lid assembly	KR-4001-B
19	Lid Gasket - kit of 3	KR-11-K3
20	Drip free diaphragm - kit of 5	KR-115-K5
21	Cup	KR-466-K
22	Complete cup	KR-566-1-B
23	Circlip	25746-007-K5
24	Seal & Pin Kit	GTI-428-K5
25	Spring	JGV-262-K5

WiP o by DEVILBISS

≡ SRI-SRIW



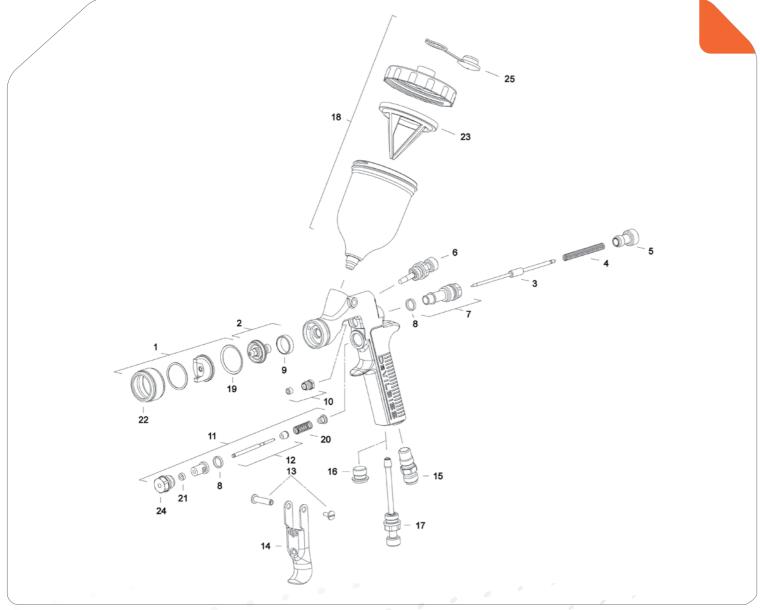

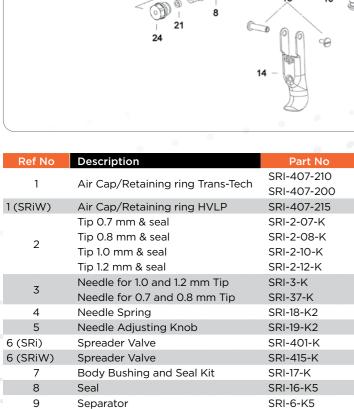

SRI-411-K3

Needle Packing Kit of 3

	11	Air Valve Assembly	SRI-404-K
	12	Air Valve Stem Assembly	-
	13	Trigger Stud and Screw Kit	SRI-412-K
	14	Trigger	SRI-9-K
	15 (SRi)	Air Inlet Adaptor	SRI-20-K
	15 (SRiW)	Air Inlet Adaptor	SRI-40-K
	16	Blanking Plug (to replace airflow valve)	SRI-21
	17	Airflow Valve	SRI-402-K
	18	Cup	SRI-510
	19	Aircap Seal	SRI-35-K5
	20	Airvalve Spring	SRI-23-K2
	21	Airvalve Seal	-
1	22	Retaining Ring	-
	23	Filter	SRI-42-K3
	24	Airvalve Body	-
	25	Drip Check Lid Kit of 5	GFC-2-K5
	25	Service Kit for SRi/SRI-W	SRI-416

		1	
Ref No	Description	Part No	
1	Air Cap Retaining Clip	JGA-156-K5	
2	Suction Feed Trans-tech® Aircap	VRIPRO-100-TV1-K	
2	Pressure Feed Trans-tech® Aircap	VRIPRO-100-TV2-K	
3	Air Cap Retaining Ring & Seals	ADV-403-K	
4	Fluid Tip - 0.85,14, 16, 18	SP-200S-**-K	
5	Separator	SP-626-K5	
6	Body Bushing & Seal	SN-6-K	
7	Fluid Needle - 0.85, 1.4, 1.6, 1.8 mm	ADV-310-**-K	
8	Fluid Adjusting Knob, Spring & Pad Kit	ADV-6-K	
9	Spreader Valve Assembly	ADV-401-K	
10	Packing, Spring & Packing Nut Kit	SN-404-K	
11	Air Valve Replacement Kit	SN-402-K	
12	Trigger, Stud & Screw Kit	SN-63-K	
13	Air Inlet	SN-9-K	
14	Colour ID Ring Kit (4 Colours)	SN-26-K4	3

15	Airflow Valve	ADV-401-K
16	Fluid Inlet Connector and seal	ADV-7-K
17	Cup lid assembly	KR-4001-B
18	Lid Gasket - kit of 3	KR-11-K3
19	Drip free diaphragm - kit of 5	KR-115-K5
20	Cup	KR-466-K
21	Complete cup	KR-566-1-B
22	Filter	KR-484-K10
23	Torx Key	SPN-8-K2
24	Trigger Stud & Torx Screw (kit of 5)	SN-405-K5

SERVICE PARTS

Spray Gun repair kit	PRO-415-1
Seal and Pin Kit, kit of 5	GTI-428-K5

JGA by DEVILBISS AUTOMOTIVE REFINISHING

∃ VRI Pro





Ref No	Description	Part No
1	Air Cap Retaining Ring	JGA-156-K5
2	Gravity Feed Trans-tech® Air Cap	VRIPRO-100-TV1-K
3	Air Cap Retaining Ring & Seals	ADV-403-K
4	Fluid Tip 12 or 13	SP-200S-XX-K
5	Separator	SP-626-K5
6	Body Bushing & Seal	SN-6-K
7	Fluid Needle 12 or 13	ADV-310-**-K
8	Fluid Adjusting Knob, Spring & Pad Kit	ADV-6-K
9	Spreader Valve Assembly	ADV-402-K
10	Packing, Spring & Packing Nut Kit	SN-404-K
11	Air Valve Replacement Kit	SN-402-K
12	Trigger, Stud & Screw Kit	SN-63-K
13	Air Inlet	SN-9-K

	14	Colour ID Ring Kit (4 Colours)	SN-26-K4		
	15	Airflow Valve	ADV-401-K		
	16	Gravity Cup Kit	GFC-501		
	17	Drip Check Lid (kit of 5)	GFC-2-K5		
	18	Gravity Cup Lid	GFC-402		
	19	Filter	KGP-5-K5		
	20	Spanner, Torx, Brush & ID Rings	SN-406		
4	21	Torx Key	SPN-8-K2		
	22	Trigger Stud & Torx Screw (kit of 5)	SN-405-K5		
SERVICE PARTS					
1		Spray Gun repair kit	PRO-415-1		
		Seal and Pin Kit, kit of 5	GTI-428-K5		

-18 5 24
19 - 22
90
21 -
25 90
15-0-16
12-

Ref No	Description	Part No
1	Air Cap/Retaining ring (* = 186+ or $30+$)	AV-4239-***
1a	Spring Clip - Kit of 5	JGA-156-K5
2	Tip (* = EX-1.8mm, FF-1.4mm, FW-1.6mm)	AV-645-*
3	Baffle & Seal	JGD-402-K
3a	Baffle seal - Kit of 5	GTI-33-K5
4	Packing	GTi-445-K2
5	Spreader Valve	GTI-405-K
6	Stud and Screw	GTI-408-K5
7	Needle (*= DEX, FF or FW)	JGA-421-**-K
8	Spring - Kit of 5	GTI-409-K5
9	Bushing	JGA-17
9a	Seal - Kit of 5	JGS-72-K5
10	Needle Adjusting Screw	GTI-414-K
11	Valve Assembly	JGK-449-K


12	Trigger	GTI-108
13	Connector	JGA-158
14	Airflow Valve	GTI-415-K
15	Lock Nut - Kit of 5	JGA-51-K5
16	Seal	23165-001
17	Fluid Inlet Connector and seal	JGA-159-K
18	Cup lid assembly	KR-4001-B
19	Lid Gasket - kit of 3	KR-11-K3
20	Drip free diaphragm - kit of 5	KR-115-K5
21	Cup	KR-466-K
22	Complete cup	KR-566-1-B
23	Circlip	25746-007-K5
24	Seal & Pin Kit (+ SST-8434-K5)	GTI-428-K5
25	Spring	JGV-262-K5

 $\mathbf{80}$




POVISOR 600 by DEVILESS ANTONOTIVE REFINISHED

≡ GFG

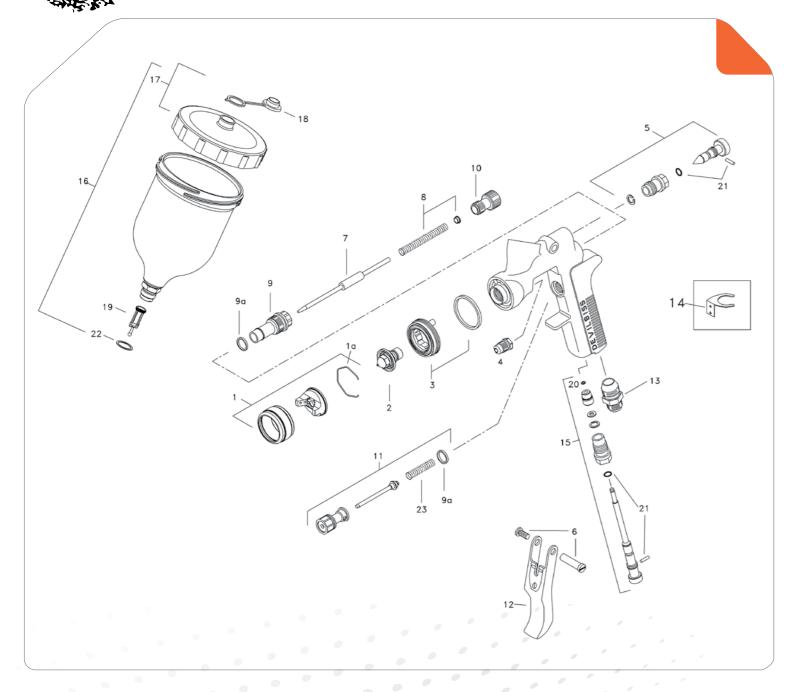



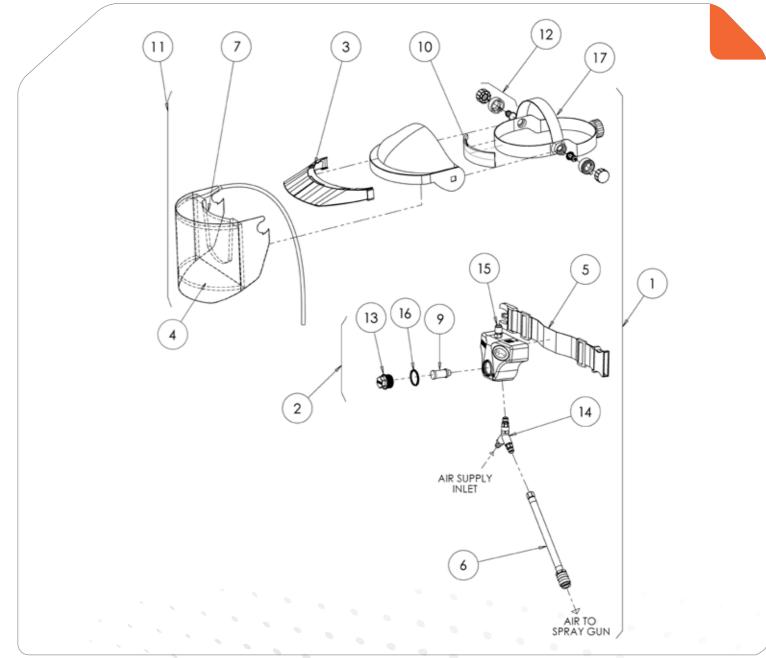

Ref No	Description	Part No
1	Air Cap/Retaining ring $*$ = 186 or 30	AV-4239-**
1a	Spring Clip	JGA-156-K5
2	Tip (* = EX-1.8mm, FF-1.4mm, FW-1.6mm)	AV-645-*
3	Baffle & Seal	JGD-402-K
4	Packing (kit of 2)	GTi-445-K2
5	Spreader Valve	GTI-404-K
6	Stud and Screw	GTI-408-K5
7	Needle (* = DEX or FF)	JGA-421-*-K
8	Spring	GTI-409-K5
9	Bushing	JGA-17
9a	Seal - kit of 5	JGS-72-K5
10	Needle Adjusting Screw	GTI-414-K
11	Valve Assembly	JGK-449-K

12	Trigger	GTI-108
13	Connector 1/4	JGA-158
14	Gun Hook	GFG-6
15	Airflow Valve	GTI-415-K
16	1/2 Ltr Gravity Cup Kit	GFC-501
17	Cup Lid	GFC-402
18	Drip Check Lid kit of 5	GFC-2-K5
19	Filter	KGP-5-K5
20	Circlip	25746-007-K5
21	Seal & Pin Kit	GTI-428-K5
22	Washer	GFC-17-K5
23	Spring	JGV-262-K5

Ref No	Description	Part No
1	Pro Visor complete unit	-
2	Belt & Regulator	PROV-20-K
3	Peak	PROV-21-K
4	Tear-off visors pack of 10	PROV-22-K10
	Tear-off visors pack of 50	PROV-22-K50
5	Belt and buckle assembly	PROV-51-K
6	1.2m Hose (To Spray Gun)	PROV-406-K
7	Rigid acetate visor face seal and air tube	PROV-25-K
8	Storage bag	PROV-26-K
9	Filter element (pack of 4)	PROV-27-K4
10	Lint-free brow band kit	PROV-52-K2

11	Visor head piece & breathing air tube	PROV-29-K
12	Spacer, stud & knob (set of all sizes)	PROV-30-K
13	Filter cap & seal	PROV-31-K
14	Y-Piece Assembly	PROV-32-K
15	Connector	PROV-33-K
16	Filter Cap Seal	PROV-34-K-K4
17	Adjustable headpiece kit	PROV-40-K
OSES		
	10m Air hose - 5/16"ID male & female QD's	PRO-415-1
	10m Air hose - 5/16"ID	GTI-428-K5





SPRAY GUN SET UP SELECTOR: Gun Inlet Pressure 2.0 bar or as stated

																								www.carlisleft.eu
Sri Pro Smart			TE5-0.8-1.0	TE5-0.8-1.0	TE5-0.8-1.0		TE5-1.0-1.2	TE5-1.0-1.2	TE5-1.0-1.2			TE5-1.0-1.2			TE5-HV5-1.0-1.2	TE5-1 0-1 2	TE5-1.0-1.2	TE5-1.0-1.2	TE5-1.0-1.2	TE5-1.0-1.2	TE5-1.0-1.2	TE5-1.0-1.2	TE5-1.0-1.2 TE5-1.0-1.2	-
Gti Pro Lite		TE20-13-1.4	TE20-13-1.4	TE20-13-1.4	TE20-13-1.4				TE20-1.3	TE20-1.3-1.4	TE20-1.3-1.4	TE20-1.3-1.4	TE20-1.2-1.3	TE20-1.2-1.3	TE20-1.2-1.3	TE20-1.2-1.3	TE20-1.2-1.3	TE20-1.2-1.3	TE20-1.2-1.3	TE20-1.2-1.3	TE20-1.2-1.3	TE20-1.2-1.3	TE20-1.2-1.3 TE20-1 2-13	
VV1 Clear																	C1-1.2-1.3	C1-1.2-1.3	C1-1.2-1.3	C1-1.2-1.3	C1-1.2-1.3	C1-1.2-1.3	C1-1.2-1.3	
V1 BASE													B+1.2-1.3	B+1.2-1.3	B+1.2-1.3	B+1.2-1.3		0	0	0	О	0	0 0	
GPG	PR10-2.0-2.5	PR10-1.3-1.4	PR10-1.3-1.4	PR10-1.3-1.4	PR10-1.3-1.4	UV1-UV2	PR10-1.6-1.8	PR10-1.4-1.8	PR10-1.3-1.4	PR10-1.3-1.4	PR10-1.3-1.4		B	8	8	<u> </u>	1							eting-eu@carlisleft.com
	utty	nt Sealer	e Etching Primer	825R Chromate Free Wash Etching Primer	901R-907R 2K Plastic Primer Surfacer	imer Surfacer	1051R-1057R High Productive Surfacer	PS1061-PS1064-PS1067 Cromax Pro Surfacer	PS1081-PS1084-PS1087 Energy Surfacer	Ultra Performance		Centari 5035 Low Emission 2K Topcoat	:mission Basecoat	oat Laquer	ne Basecoat	ourne Basecoat	37505-37605 Ultra Productive VOC Clear	ect Clear	/OC Clear	ro Star Clear	CC6700 Ultra Performance Energy Clear	ar VOC	CC6500 High Performance VOC Clear	14 1202 571111 marketing
Material	799R VOC Spray Putty	PS1900 Transparent Sealer	635R Chromate Free Etching Primer	825R Chromate Fro	901R-907R 2K Pla	UV PS140 UV-A Primer Surfac	1051R-1057R High	PS1061-PS1064-P	PS1081-PS1084-P	NS2081-NS20184 Ultra Performance		Centari 5035 Low E	Centari 6000 Low Emission Basecoat	Centari 600 Basecoat Laquer	Cromax Waterbourne Basecoat	Cromax Pro Waterbourne Basecoat	37505-37605 Ultra	CC6300 VOC Protect Clea	CC6400 Standard VOC Clear	CC6600 Cromax Pro Star Clear	CC6700 Ultra Perfc	38005 Chroma Clear VOC	CC6500 High Performand VR-1120 Valueclear VOC	efinishing +
	Polyester 7	<u> </u>	y	Primers 8				Surfacers	-	anding	Primer	2K Direct Gloss	$\overline{}$		ue (Basecoal		10		Clearcoats	5	<i></i> 1	~ 1 ~	DeVilbiss Automotive Refinishing +44 1202 571111



SPRAY GUN SET UP SELECTOR: Gun Inlet Pressure 2.0 bar or as stated





SPRAY GUN SET UP SELECTOR: Gun Inlet Pressure 2.0 bar or as stated

Category Polyester

Primers

Surfacers

SPRAY GUN SET UP SELECTOR: Gun Inlet Pressure 2.0 bar or as stated

Category	Material	GPG	DV1 BASE	DV1 Clear	Gti Pro Lite	Sri Pro Smart
Etch Primer	1k Etch Primer 2K Universal Plastic Primer	PR10-1.3-1.4				TE5-0.8-1.0
	Filler 4100	PR10-1.6-2.0				
	Filler 6100 (Sanding)	PR10-1.6-2.0				
Primers						
Surfacers						
Non standing	Filler 6100 Non Sanding	PR10-1.3-1.4			TE10-1.3-1.4	TE5-0.8-1.0
Primer						
2K Direct Gloss 2K topcaot 420	2K topcaot 420				TE10-1.2-1.3 TE20-1.2-1.4	TE-0.8-1.2
Solventborne						
Basecoat						
Waterbourne	Basecoat Waterbourne		DV1-B 1.2-1.3		TE10-1.3 HV30-1.3@1.8 Bar	TE5-0.8-1.0 HV5-0.8-1.0
Basecoat						
	Clear 9000			C1 -1.2	TE10-1.2-1.3 TE20-1.2-13	TE5-0.8-1.0
	Clear6000AS			C1 -1.2	TE10-1.2-1.3 TE20-1.2-13	TE5-0.8-1.0
	Clear Matt			C1 -1.2	TE10-1.2-1.3 TE20-1.2-13	TE5-0.8-1.0
Clearcoats	Clear UHS Speed			C1 -1.2	TE10-1.2-1.3 TE20-1.2-13	TE5-0.8-1.0

DeVilbiss Automotive Refinishing +44 1202 571111 | marketing-eu@carlisleft.com

CARLISLE

without notice. All rights reserved. AMPM560 | Form No. 02-032-01

www.carlisleft.eu

DeVilbiss Automotive Refinishing

+44 1202 571111 | marketing-eu@carlisleft.com

Clearcoats

CARLISLE

www.carlisleft.eu

without notice. All rights reserved AMPM560 | Form No. 02-032-01

Solventborne Non standing K Direct Gloss Macrofan HS2000 MATT 09890

Macrofan Power UHS Clearcoat MC 405

Macrofan Plus UHS Clearcoat MC421 Material Polyfan Rush 04210 BSB Solventbourne Hydrofan MAC1 (M1000)MAC41 (M4001) Green Tech MF602/MF606/MF610 Green TI 04001/04004/04007/04109 1acrofan Airtech MA380 tolevel MF302/MF306/MF310 PR10 -1.6 PR10 -2.5 PR10 1.4 PR10-1.6/1.8 B+ 1.2-1.3 C1 1.2-1.3 C1 1.2-1.3 C1 1.2-1.3 TE20 1.2-1.3
TE20 1.2-1.3
TE20 1.2-1.3 TE20-13-14 TE20-13-14 TE20 1.2-1.3 1.2-1.3 TE20-13-14 T110 TE5 1.0/1.2 @ 1.5 BAR
TE5 1.0/1.2 @ 1.5 BAR
TE5 1.0/1.2 @ 1.5 BAR TE5 1.0/1.2 @ 1.5 BAF TE5 1.0/1.2 @ 1.5 BAR TE5 1.0/1.2 @ 1.5 BAR TE5 1.0/1.2 @1.5 BAR

Basecoat Waterborne

Заsecoat

DYNACOATE DYNACOAT







SPRAY GUN SET UP SELECTOR: Gun Inlet Pressure 2.0 bar or as stated

Category	Material	GPG	DV1 BASE	DV1 Clear	Gti Pro Lite	Sri Pro Smart	
Etch Primer	1k Etch Primer 2K Universal Plastic Primer	PR10-1.3-1.4				TE5-0.8-1.0	
	2K Filler 540 (sanding)	PR10-1.6-2.0					
	2K HS Primer Filler	PR10-1.6-2.0					
Primers	2K Graphite Filler Sanding	PR10-1.6-2.0					
	2K Epoxy Primer	PR10-1.6-2.0					
	2K HB Filler	PR10-1.6-2.0					
	Autosurfacer UV	UV1-UV2					
Surfacers	lk Multi Plastic Primer	PR10 -1.3-1.4			TE10-1.2-1.3		
Non standing	2 K Filler 540 Non Sanding	PR10-1.3-1.4			TE10-1.3-1.4	TE5-0.8-1.0	
Primer	2K Graphite Filler Non Sanding	PR10-1.3-1.4			TE10-1.3-1.4	TE5-0.8-1.0	
2K Direct Gloss Topcoat	Topcoat				TE10-1.2-1.3 TE20-1.2-1.4		
Solventborne							
Basecoat							
Waterbourne	Basecoat WB GT		DV1-B 1.2-1.3		TE10-1.3 HV30-1.3@1.8 Bar	TE5-0.8-1.0 HV5-0.8-1.0	
Basecoat							
	2K HS Fast Clear 420			C1 -1.2-1.3	TE10-1.2-1.3 TE20-1.2-13	TE5-0.8-1.0	
	2K HS Premium Clear 420			C1 -1.2-1.3	TE10-1.2-1.3 TE20-1.2-13	TE5-0.8-1.0	
	Multi Matt Clear			C1 -1.2-1.3	TE10-1.2-1.3 TE20-1.2-13	TE5-0.8-1.0	
Clearcoats	2K MS Matting Clear			C1 -1.2-1.3	TE10-1.2-1.3 TE20-1.2-13	TE5-0.8-1.0	
	2K HS Extra Clear			C1 -1.2-1.3	TE10-1.2-1.3 TE20-1.2-13	TE5-0.8-1.0	
	2K Titanium Clear			C1 -1.2-1.3	TE10-1.2-1.3 TE20-1.2-13	TE5-0.8-1.0	
	2K Ultra Air Clear			C1 -1.2-1.3	TE10-1.2-1.3 TE20-1.2-13	TE5-0.8-1.0	
/ilbiss Automotive	Vilbiss Automotive Refinishing +44 1202 571111 marketin	ting-eu@carlisleft.com	left.com			www.carlisleft.eu	eft.eu

CARLISLE

without notice. All rights reserved. AMPM560 | Form No. 02-032-01

CARLISLE

without notice. All rights reserved. AMPM560 | Form No. 02-032-01

arlisleft.eu

DeVilb

bis	_								Im	_	<u> </u>	IΩ	IN)	Ī	<u> </u>		(A				- T			- T	
s Automotive R				Clearcoats					Basecoat	Waterborne	Basecoat	Solventborne	2K Direct Gloss	Primer	Non standing		Surfacers				Primers			•	Category
lbiss Automotive Refinishing +44 1202 571111 marketing-eu@carlisleft.com	Mipa 2K HS Klarlack C590	Mipa 2K HS Klarlack C75	Mipa 2K HS Klarlack CC8	Mipa 2K HS Klarlack CC9	Mipa 2K HS Express Klarlack CX4	Mipa 2K HS Klarlack CCM	Mipa 2k Express Klarlack CX11	WBC 2 Schicht Basislack			Mipa BC Basislack	Mipa OC 2K PUR Autolack HS Mipa 2K PUR HS	WBS 1K Grundierfiller	Mipa 2K Multifiller Non Sand	Mipa 2k HS Filler	2K HS Express Filler FX4/FX5	Mipa 2K Multifiller	Mipa 4+1 Filler HS	EP Primer Epoxy	Mipa 1k Fast Primer	Haft Promoter 1k Plastic Ferrous Metals	Aktivprimer Wash Etch	Mipa 1K UV Fuller	Mipa P60 Spritzfuller	Material
arketing-eu@ca												PR10-1.3-1.4	PR10-1.3-1.4	PR10-1.3-1.4	PR10-1.4	PR10-1.4-1.6	PR10-1.4-1.6	PR10-1.6-1.8	PR10-1.4-1.8	PR10-1.4		PR10- 1.4	UV1 UV2	PR10-2.0- 2.5	GPG
rlisleft.com								1.2 -1.3 B+			B+ 1.2-1.3														DV1 BASE
	C1 1.2-1.3	C1 1.2-1.3	C1 1.2-1.3	C1 1.2-1.3	C1 1.2-1.3	C1 1.2-1.3	C1 1.2-1.3																		DV1 Clear
	TE20 1.2-1.3	TE20 1.2-1.3	TE20 1.2-1.3	TE20 1.2-1.3	TE20 1.2-1.3	TE20 1.2-1.3	TE20 1.2-1.3	TE20-1.2-1.3 HV30 1.2-1.3			TE20-1.2-1.3	TE20-1.2-1.3		TE20-13-14	TE20-13-14					TETE20 1.3-1.4	TE20 1.2-1.3	TE20 1.3-1.4			Gti Pro Lite
www.ca	TE5 1.0/1.2 @ 1.5 BAR	TE5 1.0/1.2 @ 1.5 BAR	TE5 1.0/1.2 @ 1.5 BAR	TE5 1.0/1.2 @ 1.5 BAR	TE5 1.0/1.2 @ 1.5 BAR	TE5 1.0/1.2 @ 1.5 BAR	TE5 1.0/1.2 @ 1.5 BAR	TE5 1.0/1.2 @ 1.5 BAR			TE5 1.0/1.2 @ 1.5 BAR	TE5 1.0/1.2 @1.5 BAR													Sri Pro Smart

SPRAY GUN SET UP SELECTOR: Gun Inlet Pressure 2.0 bar or as stated





 st 2.0 bar at gun handle / 1.5 bar at digital gauge

Non sanding Primer 2K Single

illers

D8092 Universal Etch Primer

D8010/D8015/D8017 Rapid Greymatic

Primer

D8018/D8019/D8024 Greymatic Primer

D8501/D8505/D8507 HS Wet on Wet

Primer

PR10-1.6-1.8 PR10-1.6-1.8

PR10-1.3-1.4

PR10-1.3-1.4

0.1-8.0-53T

Stage

UHS Deltron® Progress



91

SPRAY GUN SET UP SELECTOR: Gun Inlet Pressure 2.0 bar or as stated

Category	Material	505	DV/1 BASE	DV1 Close	GH Dro Lite	Cri Dro Cmart
category	ואומנכוומו	2	DAY DAY	_	סנו בונע	JII FIO JIIIAI C
Polyester	Valspar 680 Filler	PR10-2.0-2.5				
	Octoral PW170 Washprimer	PR10-1.3-1.4				
	Octoral PF-131 Surfacer Grey White Black	PR10-1.6-1.8				
Primers	Octral PF132 HS Tinting Surfacer	PR10-1.6-1.8				
	Octoral PF144HS Non Sanding Filler	PR10-1.4-1.6				
	Octoral PF131 Surfacer Grey White Black	PR10-1.3-1.4			TE20-1.3-1.4	
Surfacers						
Non standing	Octoral PH254 Non Sanding Primer	PR10-1.3-1.4			TE20-1.3-1.4	
Primer	Octoral PF144 Non Sanding Filler	PR10-1.3-1.4			TE20-1.3-1.4	TE5-1.0-1.2
2K Direct Gloss	Octocryl Octocryl Hs420	PR10-1.3-1.4			TE20-1.3-1.4	TE5-1.0-1.2
Solventborne	Octobase		B+ 1-1.2-1.3		TE20-1.3-1.4	TE5-1.0-1.2 HV5-1.0-1.2
Basecoat						
Waterborne Basecoat	Octobase Eco Plus		B+ 1-1.2-1.3		TE20-1.3-1.4	TE5 1.0-1.2 HV5-1.0-1.2
	Octoral C450 Scratch Resistance			C1-1.2-1.3	TE20-1.2-1.3 T110-1.2-1.3	TE5 1.0-1.2
	Octoral C250 Scratch Resistance			C1-1.2-1.3	TE20-1.2-1.3 T110-1.2-1.3	TE5 1.0-1.2
	Octoral CM-267-269			C1-1.2-1.3	TE20-1.2-1.3 T110-1.2-1.3	TE5 1.0-1.2
Clearcoats	Octroal C300 HS400 Speed Clear			C1-1.2-1.3	TE20-1.2-1.3 T110-1.2-1.3	TE5 1.0-1.2
	Octoral C400 HS 420 Airdry Clearcoat			C1-1.2-1.3	TE20-1.2-1.3 T110-1.2-1.3	TE5 1.0-1.2
	Octoral C401 HS Airdry Clearcoat			C1-1.2-1.3	TE20-1.2-1.3 T110-1.2-1.3	TE5 1.0-1.2
	Octoral C240 C50 C60			C1-1.2-1.3	TE20-1.2-1.3 T110-1.2-1.3	TE5 1.0-1.2
	Octoral C500 HS 420 Superb Clearcoat			C1-1.2-1.3	TE20-1.2-1.3 T110-1.2-1.3	TE5 1.0-1.2

DeVilbiss Automotive Refinishing +44 1202 571111 | marketing-eu@carlisleft.com

www.carlisleft.eu



without notice. All rights reserved. AMPM560 | Form No. 02-032-01

www.carlisleft.eu

_

Clearcoat

Deltron® UHS

Waterborne

Basecoat Waterborne Envirobase® High Performance

DV1- B -1.3

TE10-1.2-1.3 HV30-1.2-1.3@1.75 Bar

TE5-0.8-1.0 HV5-0.8-1.0

DV1- C+ -1.2

HV25-1.1-1.2

TE5-0.8-1.0

DeVilbiss Automotive Refinishing +44 1202 571111 | marketing-eu@carlisleft.com

CARLISLE

DEVILBISSES AUTOMOTIVE REFINISHING



SPIES HECKER

93

SPRAY GUN SET UP SELECTOR: Gun Inlet Pressure 2.0 bar or as stated

																						sleft.eu	Q	DeVilbi																							ı	
mart	8-1.2								8-1.2		2-1.2		8-1.0	2.	8-1.2	8-1.2	8-1.2	8-1.2	8-1.2	8-1.2	8-1.2	www.carlisleft.eu	RLISLE	DeVilbiss Automotive Refinishing					Clearcoats				Basecoat	Basecoat	Solventborne	2K Direct Gloss		Primer	Non standing	Surfacers				Primers			Category	
Sri Pro S	TE5-0.8-1.2					_	1		TE5-0.8-1.2		I E5-0.8-1.Z		TE5-0.8-1.0	2	TE5-0.8-1.2		59	efinishin		Permafast Clear 8007	Permasoild	Permasoild	Permasoild	Permasoild	Permasolid	Permahyd Hi-Tec 480	Pemahyd 280/285		Permacron	relillasollo	Darmasolid	Permasoild	Permasoild	Permasoild	Dermasoild	Permasoild	Priomat Ela	Priomat Wa	Priomat 1k	Permafleet	Materia Raderal Sp	l						
Gti Pro Lite	TE10-1.2-1.3	TE10-1.2-1.3							TE10-1.3-1.4	TF10-13	TE20-1.3		TE10-1.3		TE10-1.2-1.3 TE20-1.2-13		©2020 Carlisi	+44 1202 571111		Clear 8007	Permasoild Race Clear 8700	Permasoild HS Speed Clear 8800	Permasoild HS Clearcoat 8055	ermasolid HS Clearcoat 8034	Dermasolid HS Optimum Plus Clearcoat 8650	H-Tec 480	80/285		Permacron 293/295 Series	7/3 Selles	Dermacolid 275 Carios	Permasoild HS Vario Surfacer 5340	Permasoild HS WOW Speed Surfacer 5550	Permasolid HS Speed Surfacer 5550	Performance Surfacer 5320	Permasoild ik UV-A Primer 9002	Priomat Elastic Primer 3300	iomat Wash Primer 4075	Priomat 1k Primer 4085	Permafleet Transparent Sealer	Material Raderal Spray Polyester 3508							
DV1 Clear															C1 -1.2		uid Technologies, Inc.	marketing-eu@carlisleft.com														PR10-1.314	PR10-1.3-1.4	PR10-1.4-1.8	DB10-1.4-1.8	DD10-16-18	PR10-1.31.4	PR10-1.3-1.4	PR10-1.3-1.4	PR10-1.3-1.4	GPG PR10-2.0-2.5							
DV1 BASE													DV1-B 1.2-1.3									eft.com	<i>DeVilbiss</i> ® is a registered trade	ırlisleft.com								B+1.2-1.3	B+1.2-1.3		B+1.2-1.3												DV1 BASE	
GPG	PR10-1.3-1.4	PR10-1.6-2.0	PR10-1.6-2.0	PR10-1.6-2.0	PR10-1.6-2.0	PR10-1.6-2.0	0V1-0V2		PR10-1.3-1.4													ting-eu@carlisleft.com	mark of Ca		C1-1.2-1.3	C1-1.2-1.3	C1-1.2-1.3	C1-1.2-1.3	C1-1.2-1.3	C1-1.2-1.3	C1-1.2-1.3																DV1 Clear	
									ר Sanding						Ve	or .	att					1202 571111 marketing	riisle Fluid Technologies, Inc. Models and specifications subject to change without notice. All rights reserved. AMPM560 Form No. 02-032-01		TE20-1.2-1.3	TE20-1.2-1.3	TE20-1.2-1.3	TE20-1.2-1.3	TE20-1.2-1.3	TE20-1.2-1.3	TE20-1.2-1.3	TE20-1.2-1.3	TE20-1.2-1.3		TE20-1.2-1.3	-	TE20-1 3-1 4	TE20-1.3-1.4	TE20-1.3-1.4	TE20-1.3			TE20-13-1.4	TE20-13-1.4	TE20-13-1.4	TE20-13-1.4	Gti Pro Lite	
Material	Washprimer 1K CF 2K Plastic Primer	1K All Plastics Primer	ColourBuild Plus Sanding	AutosurfacerRapid	Autosurfacer HB	Autosurfacer EP11	Autosurfacer UV		Colourbuild Plus Non Sanding		Autocryl Pius LV MM		Atowave MM 2.0		Autoclear LV Exclusive	Autoclear LV Superior	Autoclear Mix and Matt	Autoclear UV	Autoclear WB	Autoclear 2.0	Autoclear Aerodry	efinishing +44	specifications subject to ch		TE5-1.0-1.2	TE5-1.0-1.2	TE5-1.0-1.2	TE5-1.0-1.2	TE5-1.0-1.2	TE5-1.0-1.2	TES-1.0-1.2	TE5-1.0-1.2	TE5-HV5-1.0-1.2				TE5-10-13			TE5-1.0-1.2	TES-1 0-1 2	1013	TE5-0.8-1.0	TE5-0.8-1.0	TE5-0.8-1.0		Sri Pro Smar	
Category	ier		<u> </u>	Primers [/]				Surtacers	Non standing		SS	Solventborne	2		,			,	4			DeVilbiss Automotive Refinishing +44 1202 571111	hange without notice. All right AMPM560 Form No.	www.carlisleft.eu																							1	
				[, 1	<u> </u>	<u>- *1</u>	- / 1		<u> </u>		•	•	•		•	•	DeVilbi	ts reserved. . 02-032-01	left.eu																							1	





SPRAY GUN SET UP SELECTOR: Gun Inlet Pressure 2.0 bar or as stated





SPRAY GUN SET UP SELECTOR: Gun Inlet Pressure 2.0 bar or as stated

Cat	Category	Material		GPG	DV1 BASE	DV1 Clear	Gti Pro Lite	Sri Pro Smart		
Pol	Polyester	U1100 Standox Sprayfiller	ayfiller	PR10-2.0-2.5						
		U2500 Standox 2K Sealer Transparent	Sealer Transparent	PR10-1.3-1.4			TE20-13-1.4			
		U3100 Etching Adhesion Primer	esion Primer	PR10-1.3-1.4			TE20-13-1.4	TE5-0.8-1.0		
Prir	Primers	U3010 1KPrimer Filler	ler.	PR10-1.3-1.4			TE20-13-1.4	TE5-0.8-1.0		
		U3ZZ00 Plastic Primer Surfacer	ner Surracer	PR10-1.3-1.4			I EZU-13-1.4	0.1-8-1.0		
		17530 VOC Pro Filler		PB10-1 6-1 8				TE5-1 0-1 2		
7	Surfacers	U7560 VOC Xtra Filler	iler	PR10-1.4-1.8				TE5-1.0-1.2		
5	2	U7600 VOC Extreme	ie Filler	PR10-1.3-1.4			TE20-1.3	TE5-1.0-1.2		
No	Non standing	U7650 VOC Extreme WOW Filler	ie WOW Filler	PR10-1.3-1.4			TE20-1.3-1.4			
Prir		U7580 VOC Non Stop Primer Surfacer	op Primer Surfacer	PR10-1.3-1.4			TE20-1.3-1.4			
		Standocryl VOC 2k					TE20-1.3-1.4	TE5-1.0-1.2		
X .	S									
Sol	orne	Standox Basecoat			B+1.2-1.3		TE20-1.2-1.3			
Bas	Basecoat									
Wa	Waterborne	Standohyd Plus Basecoat	secoat		B+1.2-1.3		TE20-1.2-1.3	TE5-HV5-1.0-1.2		
<u>, , , , , , , , , , , , , , , , , , , </u>	,	Standoblue Basecoat	at		B+1.2-1.3		TE20-1.2-1.3	TE5-1.0-1.2		
		K9530 VOC Express Clear	s Clear			C1-1.2-1.3	TE20-1.2-1.3	TE5-1.0-1.2		
		K9570 Platinum Clear	ar			C1-1.2-1.3	TE20-1.2-1.3	TE5-1.0-1.2		
		VOC 2K Clearcoat				C1-1.2-1.3	TE20-1.2-1.3	TE5-1.0-1.2		
Cle	Clearcoats	K9560 VOC Xtra Clear	ear			C1-1.2-1.3	TE20-1.2-1.3	TE5-1.0-1.2		
		K9580 VOC Extreme Clear	e Clear			C1-1.2-1.3	TE20-1.2-1.3	TE5-1.0-1.2		
		K9590 VOC Perforn	nance Clear			C1-1.2-1.3	TE20-1.2-1.3	TE5-1.0-1.2		
		K9590 VOC Easy Clear	Jear			C1-1.2-1.3	TE20-1.2-1.3	TE5-1.0-1.2		
DeVilbiss A	utomotive Re	efinishing +4	DeVilbiss Automotive Refinishing +44 1202 571111 marketing		-eu@carlisleft.com				www.carlisleft.eu	left.eu
CARLI	ISIE		©2020 Carlisle Fluid Techn	8	gies, Inc. DeVilbiss® is a registered trademark	trademark of Carlisle Flui	of Carlisle Fluid Technologies, Inc. Models and spec	ifications subject to change with	ct to change without notice. All rights reserved AMPM560 Form No. 02-032-01	s reserved. . 02-032-01
Form No. 02-032-01	AMPM560 F							COLUMN TO THE PROPERTY OF THE	SHIDCHCHARL CHT	C
All rights reserved	hange without notice	edifications subject to d	DeVilbiss® is a registered trademark of Carliste Fluid Technologies. Inc. Models and specifications subject to change without notice. All rights reserved	ademark of Carlisle Flu	///b/ss® is a registered to	nc.	©2020 Carliste Fluid Technologies			
www.carlisleft.eu	www.c				sleft.com	marketing-eu@carlisleft.com	+44 1202 571111 mai	Refinishing	iss Automotive	DeVilbiss
								S	Clearcoats	
			TE20-12 - 13	C1-12-13	<u>, </u>			S5200 Flex Clear		
		+	TE20 1.3 - 1.4	C1-1.3 - 1.4	<u> </u>		ed d	S5100 Air Dry Clear		
			300	2	?			000000000000000000000000000000000000000		
									Basecoat	
			1.2 - 1.3 TE20		+ 1.2 - 1.3	B+		ne Syrox Basecoat	Waterborne	
									Basecoat	
							ed .	no Product Offered	Solventborne	
							ă	Gloss No Product Offered	2K Direct Gloss	
									Primer	
1		+				7.04	I Salla Sullacei	Ing SOCZO/SOCIO NOIL SAITO SUITACEI	Non sanding	
						0	00000		2	
<u> </u>									Surfacers	
						PR10-1.6-1.8	nding Surfacer	S3020/S3060 Sanding Surfacer		
								Γ		
									Primers	
						PR10-1.3-1.4	nesion Promoter	S2500 Plastic Adhesion Promoter		
						PR10-1.3-1.4	ler er		01900	
							ŭ		Polvester	
		Sri Pro Smart	Gti Pro Lite	DV1 Clear	DV1 BASE D	Pri Pro		Material	Category	
							ı			

SPRAY GUN SET UP SELECTOR: Gun Inlet Pressure 2.0 bar or as stated



UEVILBISSS. AUTOMOTIVE REFINISHING

CONDITIONS OF SALE CARLISLE FLUID TECHNOLOGIES UK LTD ("CFTUK")

1. INTERPRETATION

1.1 In these Conditions:

Business Day: a day (other than a Saturday, Sunday or public holiday) when banks in London are

open for business.

Buyer: Is the person who accepts CFTUK's

quotation or whose order is accepted by

CFTUK.

Conditions: Are these conditions of sale and (unless

the context otherwise requires) includes any special terms on the face of CFTUK's quotation or acceptance of the Buyer's

order.

Contract: Is the contract for the purchase and sale

of the Goods and/or supply of services.

Goods: Are the goods which CFTUK is to supply.

2. BASIS OF THE SALE

- 2.1. Subject to CFTUK's quotation, all Goods are sold and services supplied subject to these Conditions to the exclusion of any other terms and conditions.
- 2.2. No variation to these Conditions shall be binding unless agreed in writing by a general manager of CFTUK.
- 2.3. CFTUK's employees or agents are not authorised to make any representations unless confirmed by CFTUK in writing. The Buyer acknowledges that it does not rely on, and irrevocably waives any claim it may have for damages for or the right to rescind the Contract for any such representations which are not so confirmed (unless such representations were fraudulently made).
- 2.4. Any advice or recommendation given by CFTUK or its employees or agents to the Buyer or its employees or agents which is not confirmed in writing by CFTUK is followed or acted upon entirely at the Buyer's own risk and CFTUK shall not be liable for any such advice or recommendation which is not so confirmed.
- 2.5. Any typographical, clerical or other error or omission in any sales literature, quotation, price list, acceptance of offer, invoice or other document or information issued by CFTUK shall be subject to correction without any liability on the part of CFTUK.

3. ORDERS AND SPECIFICATIONS

- 3.1. Quotations are valid for 60 days only. No order submitted by the Buyer shall be deemed to be accepted by CFTUK unless and until confirmed in writing by CFTUK.
- 3.2. The Buyer is responsible for ensuring the accuracy of the terms of any order and for giving CFTUK any necessary information within a sufficient time to enable CFTUK to perform the Contract.
- 3.3. The quantity and description of and any specification for the Goods or services shall be those set out in CFTUK's quotation (if accepted by the Buyer) or CFTUK's acceptance of the Buyer's order.
- 3.4. CFTUK reserves the right to make any changes in the specification of the Goods (including materials and components) which are required to conform with any applicable law or, which do not materially affect their quality or performance.
- 3.5. An order once accepted by CFTUK may only be cancelled with its written agreement and the Buyer shall indemnify CFTUK in full against all loss (including loss of profit), costs (including labour and materials) and damages incurred by CFTUK.

4. DRAWINGS AND SPECIFICATIONS

4.1. Any specifications or drawings supplied remain

CFTUK's sole property and are subject to recall at any time before CFTUK's quotation is accepted. Any drawings supplied are not to be used for construction purposes. Where CFTUK's quotation includes a drawing reference, copy of any approved prints or equipment data sheets, these must be signed by the Buyer and must accompany the equipment purchase order.

- 4.2. Before signing the prints the Buyer shall check equipment size, location of building, and all interferences as shown on the drawings, data sheets etc and clearances and note clearly and comprehensively any changes or interferences on the prints.
- 4.3. If Goods are to be made or any process is to be applied in accordance with a specification, drawing or design submitted by the Buyer, the Buyer shall indemnify CFTUK against all loss, damages, costs and expenses awarded against or incurred by CFTUK in connection with or paid or agreed to be paid by CFTUK in settlement of any claim for infringement of any third party rights which results from CFTUK's use of such material.
- 4.4. If any claim is made against the Buyer that the Goods supplied or their proper use infringe the intellectual property rights of any other person, CFTUK shall indemnify the Buyer against all damages, costs and expenses awarded against the Buyer in connection with the claim provided that:
- 4.4.1. CFTUK is given full control of any proceedings or negotiations in connection with any such claim;
- 4.4.2. the Buyer shall pay to CFTUK all damages and costs (if any) awarded in favour of the Buyer which are payable by, or agreed with the consent of the Buyer (which consent shall not be unreasonably withheld) to be paid by, any other party in respect of any such claim; and
- 4.4.3. without prejudice to any duty of the Buyer at common law, CFTUK may require the Buyer to take such steps as CFTUK may reasonably require to mitigate or reduce any such loss, damages, costs or expenses for which CFTUK is liable to indemnify the Buyer under this condition.

5. PREPARATION OF SITE

- 5.1. The Buyer shall obtain all necessary licences, permits and
- 5.2. The Buyer shall clear the site for installation and make it ready for the reception of the Goods. The Buyer shall keep the site free from water, debris and obstructions, and make required alterations to buildings and other equipment if required for the proper clearance and support of the Goods.
- 5.3. The Buyer shall ensure that CFTUK shall not be delayed by the operations of others (including the Buyer) or the Buyer's failure to provide the conditions and facilities required. If such delays cause extra visits by CFTUK, these will be charged in addition.
- 5.4. The Buyer shall, at its own risk, unload the Goods and store them close to the point of erection, provide safe and convenient storage room for tools and materials, provide adequate work room for CFTUK personnel, give proper care to and provide insurance against loss by fire and theft for all materials and equipment prior to, during and after installation.

6. INSTALLATION LIABILITY

5.1. The Buyer shall provide the necessary foundations required, carry out cutting away and making good, and grouting in foundation bolts etc, and will provide a level concrete floor for the plant of adequate strength. The Buyer shall be entirely responsible for the exact siting of the Goods to meet the Buyer's requirements.

- 6.2. All gas, water, electrical and compressed air services (including interconnecting wiring) shall be provided by the Buyer. All building work such as cutting holes etc for stacks to be undertaken by the Buyer.
- 6.3. If CFTUK undertakes any of the work detailed in the previous paragraphs to complete installation, such work shall be charged in addition and CFTUK shall not be responsible for any consequential damage.

7. PLANT ACCEPTANCE/TAKING OVER

- 7.1. The Goods shall be deemed to have been accepted at the earlier of:
 - 7.1.1. When installation has been completed and the Goods have passed or are deemed to have passed all tests provided for in CFTUK's proposal; or
 - 7.1.2. One calendar month after the Goods shall have been put into use.
- 7.2. The time of acceptance shall not be delayed because of additions, minor omissions or defects which do not materially affect the use of the Goods or if the Buyer is preventing CFTUK from completing the Contract.

8. PRICE

- 8.1. The price shall be CFTUK's quoted price (or if a quoted price is no longer valid), the price stated in CFTUK's acknowledgement of order. Prices are ex works.
- 8.2. CFTUK may, by giving notice to the Buyer at any time before delivery, increase the price to reflect any increase in the cost to CFTUK which is due to any factor beyond the control of CFTUK.
- 8.3. Any applicable value added tax or other taxes or duties are payable by the Buyer in addition.
- 8.4. Goods for export will be packed in good quality export cases at the Buyer's cost. Any special packing requirements of the Buyer will attract an additional charge. Packing for parcel post or air freight will be in an appropriately economic manner using cartons and/or parcels.

9. TERMS OF PAYMENT

- Payment shall be made in accordance with CFTUK's quotation.
- O.2. CFTUK may recover the price, notwithstanding that delivery may not have taken place and the property in the Goods has not passed. The time of payment shall be of the essence of the Contract.
- 9.3. CFTUK may charge the Buyer interest (both before and after any judgement) on the amount unpaid, at the rate of 4 per cent per annum above the base rate from time to time of JP Morgan until payment in full is made.

10. DELIVERY

- 10.1. The method of delivery shall be in accordance with CFTUK's quotation. The Buyer must obtain any import or export licences required.
- 10.2. Any dates given for delivery of the Goods or provision of services are approximate only and CFTUK shall not be liable for any delay howsoever caused. Time for delivery or performance shall not be of the essence.
- 10.3. The Goods may be delivered in instalments. Each delivery shall constitute a separate contract and failure by CFTUK to deliver any one or more of the instalments in accordance with these Conditions or any claim by the Buyer in respect of any one or more instalments shall not entitle the Buyer to treat the Contract as a whole as repudiated.
- 10.4. If the Buyer fails to take delivery of the Goods or fails to give CFTUK adequate delivery instructions within 14 days of their availability CFTUK may:
 - 10.4.1. store the Goods until actual delivery and charge the Buyer for the costs (including insurance) of

storage; or

- 10.4.2. sell the Goods at the best price readily obtainable and (after deducting all storage, selling and other expenses) account to the Buyer for the excess over sums owing by the Buyer or charge the Buyer for any shortfall.
- 10.5. Where CFTUK arranges forwarding of the Goods, the Buyer shall notify CFTUK and the carrier in writing within 48 hours of delivery of any damage to the Goods or shortage in delivery.
- 10.6. The Buyer shall inspect the Goods on receipt and notify CFTUK of any defects within 7 days of delivery failing which the Buyer shall be deemed to have accepted them. After acceptance the Buyer shall not be entitled to reject Goods. The Buyer shall not be entitled to reject the Goods for any defect or failure which is so slight that it would be unreasonable to reject them.

11. RISK AND PROPERTY

- 1.1. Risk in the Goods shall pass to the Buyer when CFTUK notifies the Buyer that the Goods are available for collection or when the Goods leave CFTUK's premises, whichever is the earlier.
- 11.2. Notwithstanding any other provision of these Conditions, the property in the Goods shall not pass to the Buyer until CFTUK has received in cash or cleared funds payment in full of all sums due under the Contract and all other contracts between the Buyer and CFTUK (whether or not the sums due under those contracts are immediately due and payable). Until then the Buyer shall:
 - 11.2.1. hold the Goods as CFTUK's fiduciary agent and bailee, and shall keep them separate from all other goods and properly stored, protected and insured and identified as CFTUK's property but may resell or use the Goods in the ordinary course of its business;
 - 11.2.2. (provided the Goods are still in existence and have not been resold), deliver up the Goods to CFTUK on demand
 - 11.2.3. and, if the Buyer fails to do so immediately, CFTUK may enter any premises of the Buyer or any third party where the Goods are stored and repossess the Goods.

12. WARRANTIES AND LIABILITIES

- CFTUK warrants that it holds unencumbered title to the Goods and will perform services with reasonable skill and care.
- 12.2. Subject to condition 12.3, CFTUK warrants that the Goods will correspond with their specification at the time of delivery and will be free from defects in material and workmanship for 12 months from delivery.
- 12.3. The above warranty does not apply to any defect:
 - 12.3.1. arising from any drawing, design or specification supplied by the Buyer;
 - 12.3.2. arising from fair wear and tear, improper use, storage or installation or maintenance, failure to follow CFTUK's instructions (whether oral or in writing), or alteration or repair of the Goods without CFTUK's approval;
 - 12.3.3. which is not immediately notified in writing to CFTUK;
 - 12.3.4. if any sum owing by the Buyer to CFTUK has not been paid;
 - 12.3.5. in items not manufactured by CFTUK, when the Buyer shall only be entitled to the benefit of any such warranty as is given to CFTUK by the manufacturer.
- 12.4. CFTUK shall replace or repair free of charge the Goods (or the part in question) returned to CFTUK's factory carriage paid which do not meet the warranty in

- 12.5. Subject as expressly provided in these Conditions, all warranties, conditions, representations or other terms implied by statute or common law are excluded to the fullest extent permitted by law.
- 12.6. The following provisions set out CFTUK's entire liability whether arising in contract, tort (including negligence), misrepresentation (other than fraudulent misrepresentation) or otherwise howsoever arising.

AND THE BUYER'S ATTENTION IS IN PARTICULAR DRAWN TO THE FOLLOWING PROVISIONS OF THIS CONDITION

- 12.7. To the extent the law does not permit such liability to be excluded:
 - 12.7.1. CFTUK's liability to the Buyer for death or injury resulting from its negligence shall not be limited;
 - 12.7.2. CFTUK accepts liability to the Buyer for damage to the tangible property of the Buyer resulting from the negligence of CFTUK not exceeding £1,000,000 for any one incident or series of incidents arising from a common cause;
 - 12.7.3. Save as otherwise expressly provided, CFTUK's entire liability shall be limited to damages of an amount equal to the price due under the Contract.
- 12.8. Subject to condition 12.7.1 above, CFTUK shall not be liable for any increased costs, expenses, loss of profits, goodwill, business, contracts, revenues or anticipated savings or any type of special indirect or consequential loss (including loss or damage suffered by the Buyer as a result of a claim by a third party) even if such loss was reasonably foreseeable or CFTUK had been advised of the possibility of the Buyer incurring the same.
- 12.9. CFTUK shall not be liable to the Buyer or be deemed to be in breach of the Contract by reason of any delay in performing, or any failure to perform, any of CFTUK's obligations, if the delay or failure was due to any cause beyond CFTUK's reasonable control including (without limitation) flood, fire, accident, transportation delays, strikes, war or threat of war, sabotage, civil disturbance or governmental action, disruption of supplies or services.
- 12.10. Save as otherwise expressly provided, the Buyer shall indemnify CFTUK against any cost, claim, expense, loss or liability made by any person in connection with the Goods or their use.

13. INSOLVENCY AND BREACH

13.1. If the Buyer fails to make any payment when due or breaches any provision of the Contract; or CFTUK reasonably apprehends that the solvency of the Buyer may be in jeopardy CFTUK may cancel the Contract or suspend any further deliveries under the Contract without any liability to the Buyer, and if the Goods have been delivered but not paid for the price shall become immediately due and payable notwithstanding any previous agreement or arrangement to the contrary.

14. SAFETY, OPERATING AND MAINTENANCE INSTRUCTIONS

The Buyer's attention is directed to the instructions for use and cautionary notes supplied with the Goods, as well as other technical literature.

15. STANDARD OF COATING ATTAINED

The Buyer shall follow CFTUK's instructions on operation and maintenance. CFTUK accepts no responsibility for unsatisfactory results due to use of coating materials not recommended in writing by CFTUK or whose composition or quality when supplied is different from that tested by CFTUK when giving its recommendation.

16. GENERAL

- 16.1. CFTUK may assign its rights and obligations. The Buyer may not assign its rights and obligations.
- 16.2. Any notice shall be in writing addressed to the addressee at its registered office or principal place of business or such other address as may have been notified by the party giving the notice.
- 16.3. Any notice is deemed to have been received:
 - 16.3.1. if delivered personally, at the time of delivery; or
 - 16.3.2. if sent by commercial courier, at the time of signature of the courier's delivery receipt; or
 - 16.3.3. in the case of pre-paid first class post or recorded delivery, 9.00 am on the second Business Day after posting; or
 - 16.3.4. in the case of airmail, 9.00 am on the fifth Business Day after posting.
- 16.4. No delay or failure by CFTUK in enforcing or partially enforcing any provision of the Contract shall constitute a waiver of that provision or any other provision. No waiver by CFTUK shall be considered as a waiver of any subsequent breach of the same or any other provision. No waiver by CFTUK shall be effective unless in writing.
- 16.5. If any provision of these Conditions is held by any competent authority to be invalid or unenforceable in whole or in part the validity of the other provisions of these Conditions and the remainder of the provision in question shall not be affected.
- 16.6. These Conditions constitute the entire agreement between CFTUK and the Buyer concerning the supply of the Goods and replace and supersede any prior arrangement, understanding, warranty or representation (other than any fraudulent misrepresentation).
- 16.7. CFTUK's rights are cumulative and in addition to any rights available to it at common law.
- 16.8. The Contract shall be governed by the laws of England and Wales and, subject to clause, 16.9 the parties submit to the exclusive jurisdiction of the courts of England and Wales. For the avoidance of doubt, the United Nations Convention on the International Sale of Goods shall not apply to the Contract.
- 16.9. Nothing in these Conditions shall limit the right of CFTUK to take proceedings against the Buyer in any other court of competent jurisdiction, nor shall the taking of proceedings in any one or more jurisdiction preclude the taking of proceedings in any other jurisdiction, whether concurrently or not, to the extent permitted by the law of such other jurisdiction.
- 16.10. No term of this contract shall be enforceable under the Contracts (Rights of Third Parties) Act 1999 by a third party.
- 16.11 These Conditions are drafted in the English language. If these Conditions are translated into any other language, the English language text shall prevail.
- 16.12 Any notice given under or in connection with the Contract shall be in the English language. All other documents provided under or in connection with the Contract shall be in the English language.

A guide to the DSEAR and ATEX Directives

= A GUIDE TO THE DSEAR AND ATEX DIRECTIVES

What is DSEAR and ATEX?

The EU Directives 2014/34/EU(ATEX) "Equipment for use in potentially explosive atmospheres" and the "Workplace directive" 1999/92/EC (ATEX 137) are the European directives, which ensure employers work practices and manufacturers of equipment used in potentially explosive atmospheres, are safe and do not create potential explosion hazards. In other words, its all about health and safety at work for workers who handle and work with flammable and dangerous materials, to ensure they are not at risk of an explosion from the equipment and work practices.

The ATEX directives are implemented into UK law by the regulations "Dangerous Substances and Explosive Atmospheres Regulations" known as DSEAR 2002 and "the Equipment and protective systems for use in potentially explosive atmospheres regulations" 1996.

DSEAR became mandatory in July 2006. DSEAR is a legal Health and Safety requirement which is enforced by the HSE, local authorities and in part the fire service.

ATEX Compliance

As a manufacturer of equipment used in potentially explosive atmospheres, we comply with this directive by applying the CE mark along with the Explosion protection symbol (x) and other markings to show compliance of that product.

Each piece of equipment must be marked with information to enable the user to assess its suitability to be used in the environment it is intended to be used in. The equipment could be marked with the following;

- Name and address of Manufacturer
- The CE mark
- If the equipment has been certified by a Notified Body, their reference follows the CE mark
- Equipment model number/name/type
- Year of manufacture
- The Explosion protection Symbol $\langle \mathcal{E}_{\mathbf{X}} \rangle$
- The equipment Group II and category 1, 2 or 3
- For Gas (G) e.g. Group 2, Cat 2 Gas

Workplace regulations DSEAR 2002

The ATEX 1999/92/EC workplace regulations are implemented in the UK through the DSEAR 2002 Regulations. The duties for employers and owners under DSEAR are;

- Carry out a risk assessment of work involving dangerous substances and eliminate or reduce any risks identified.
- Provide equipment and procedures for accidents and emergencies.
- Instruct and train employees.
- Areas where hazardous explosive atmospheres may occur are classified into zones and where necessary marked with a specified "EX" sign at their points of entry; (eg spray booths, mix rooms, paint stores etc).
- Provide equipment and protective systems which comply with ATEX Regulations appropriate for the Zone rating of the hazardous area.
- Document all the above in an Explosion Protection

 Document

Equipment Specific Marking of Group Name and Gas Address of **Explosive Protection** Category or Dust Manufacturer CFT UK LTD Protection (£x) II 1 G Concept BOURNEMOUTH CE Mark BH11 9LH, UK -Gas Group and EEx ia IIC T4 number of **C** €₀₈₉₁ Tempera-**Notified** Tamb = 0-40°C ture Class Body **MODEL DGi** Ambient Tempera-Model TRL04ATEX21064X S/N 04/111912345, ture range or Type EC Type Exami-Example of DGi Serial Number: nation Certificate First 2 numbers denote year, 3rd Number and 4th denote month, eq March = 03, 5th and 6th denote day. remaining 5 numbers are sequential, reset at 00001 at start of New Year. Typical Markings found on Sprayguns Name and Equipment Address of CFT UK LTD Group CE Ex II2GX Category 2 Manufacture

GTI

Special

safe Use

Gas

Conditions for

Typical Markings found on Hazardous Area Equipment

Avoidance of Hazards associated with Spraying flammable materials

The main hazard with spraying is electrostatic discharges and mechanically generated sparks. To avoid these ignition hazards, you should;

Only use equipment CE marked to ATEX regulations. Most Carlisle Fluid Technologies UK Ltd Products are CE marked to ATEX eg
 Sprayguns, Digital Gauge, hoses. If in doubt, contact your distributor or Carlisle Fluid Technologies UK Ltd.

CE Mark

Model or Type

- The equipment must be installed and used in accordance with the instructions provided by the manufacturer(s).
- Ensure metallic parts of the equipment are earthed and bonded together (e.g. pressure feed tanks and pumps) to avoid potential differences between them. Metallic portable containers must be bonded and earthed. Check earth continuity at regular intervals. Keep earthing points clean.
- Use conductive air and fluid hoses to avoid static charging from air and fluid flows.
- Equip Operators with anti-static clothing and conductive footwear. Remove contaminated clothing if leaving the workplace into areas where ignitions hazards may occur e.g. smoking.
- Clean equipment with non-flammable liquids, or use safety cans with flame arrestors for use with flammable liquids.
- Removal of paint residues with scrapers made of plastic or non-sparking materials (steel scrapers can create sparks). Coat walls
 with strippable/peelable coatings to avoid removal of residues by mechanical means.

The brands you trust

DeVilbiss Automotive Refinishing is a Carlisle Fluid Technologies brand featuring products designed to deliver premium finishes for the professional automotive repair shop. DeVilbiss brand products include low-pressure manual and automatic spray guns and related accessories, including air filter reducing valves and regulators, operator breathing systems and hoses.

Let's start a conversation

We want to work together to help answer your application problems. To learn more about what we can offer, give us a call at +44 1202 571111 or visit us at

autorefinishdevilbiss.com.











81.45.785.6421





jp-rans-tokyosales@carllisleft.com



Japan